





3D View

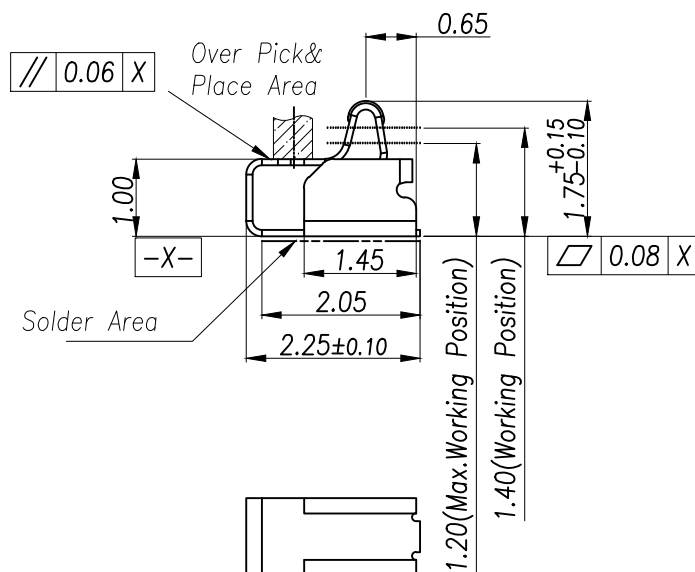

(For Reference Only)
Stated At Compression

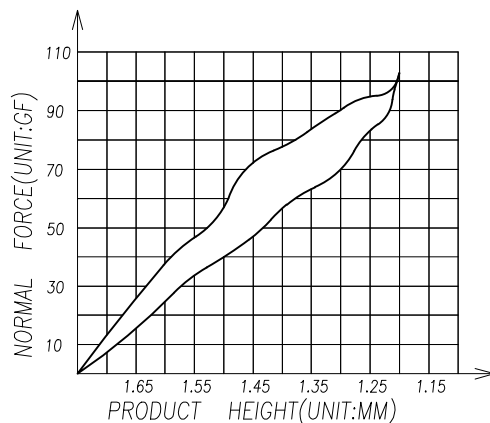

NOTES:

1:MATERIAL

1-1: SUS-301 THICKNE=0.08MM

2:SPECIFICATIONS

2-1: RATED CURRENT: 1.0A

2-2: VOLTAGE RATING: 1.5V

2-3: CONTACT RESISTANCE: 80mΩ/MAX

2-4: WELDING THRUST: ≥3KG

2-5: OPERATING TEMPERATURE: -40°C~+85°C

3:DURABILITY: 1500 CYCLES


4:SALT SPRAY TIME: 24H

5:ELECTROPLATE: THE NICKEL-PLATED SUBSTRATE IS 50u" MIN

6:REQUIREMENTS

6-1:TERMINAL TO EAT FULL TIN,NOTPEELING,
WELDING OBVIOUS COLOR AND OTHED ADVERSE


6-2:ROHS.REACH.HF HALOGER ADVERSE OF DOMESTIC
AND INTERNATIONAL ENVIRONMNTAL REQUIREMENTS



RECOMMENDED PCB LAYOUT

TOLERANCE:±0.05MM

(FOR REFERENCE ONLY)







METAL MASK T=0.08

TOLERANCE:±0.05MM


(FOR REFERENCE ONLY)

GENERAL TOLERANCES (UNLESS SOECIFIED)	SCALE: 1:1 UNIT: MM		 瑾珩精密			
DISTANCE ANGLE	DRAWN BY					
X. ±0.30 X.* ±2.0°	LUDAH		TITLE: 天线弹片 L2.25*W1.00*H1.75		MANUFACTURE DWG	
.X ±0.20 .X* ±1.0°	CHEVKED BY					
.XX ±0.15 .XX* ±0.5°	/		PART NO. TP-T1-1711		SCALE N:A	
DRAFT WHERE APPLICABLE APPROVED BY MUST REMAIN WITHIN DIMENSIONS	LUJIAH					
					SHEET 1:2	

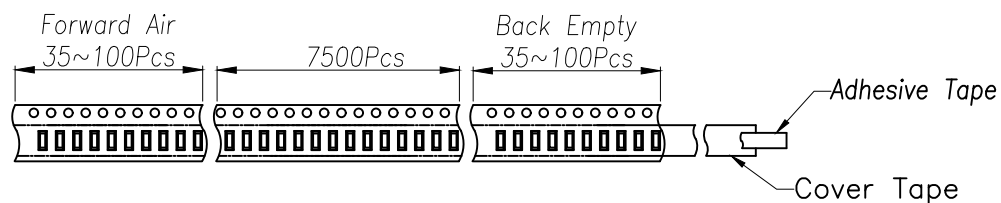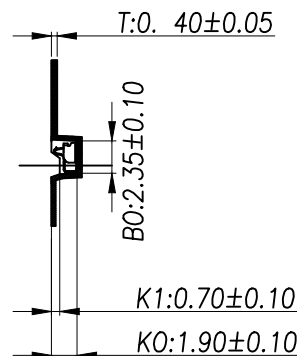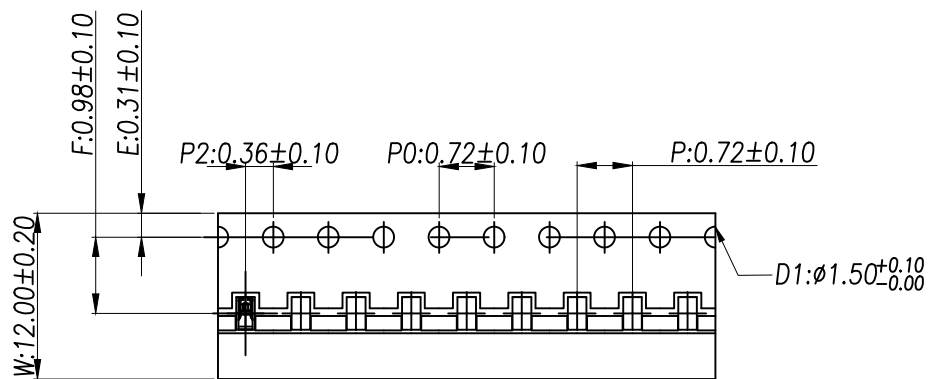


Customer To Use Direction

Pull Out Direction
(出料方向)


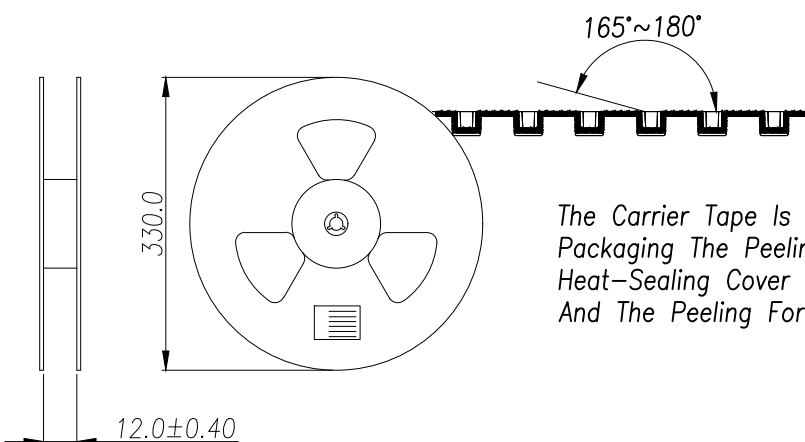


The Carrier Tape Is Heat-Sealed Packaging The Peeling Angle Of The Heat-Sealing Cover Tape Is 165°~180° And The Peeling Force Is 30~120g.

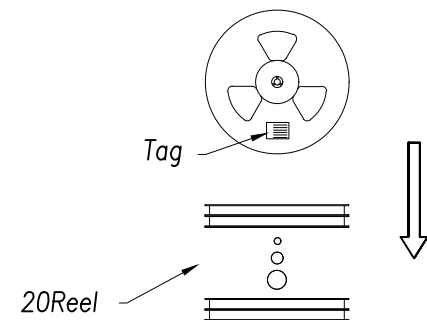

Carton Size
290*330*4 K3K

Carton Size
345*345*360 K=K

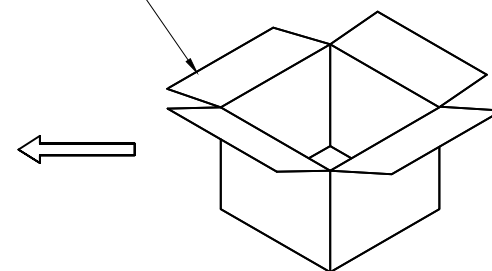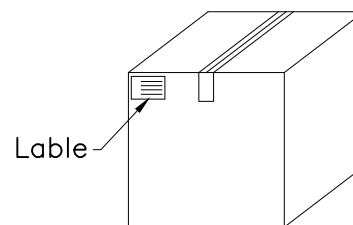

GENERAL TOLERANCES (UNLESS SOECIFIED)	SCALE: 1:1 UNIT: MM		 瑾珩精密		
DISTANCE ANGLE	DRAWN BY				
X. ±0.30 X.* ±2.0°	LUDAH		TITLE: 天线排片 L2.25*W1.00*H1.75		
.X ±0.20 .X* ±1.0°	CHEVKED BY				
.XX ±0.15 .XX* ±0.5°	/		MANUFACTURE DWG		
DRAFT WHERE APPLICABLE APPROVED BY MUST REMAIN WITHIN DIMENSIONS					
	LUJIAH		PART NO. TP-T1-1711		
			SCALE N:A		
			SHEET 2:2		