

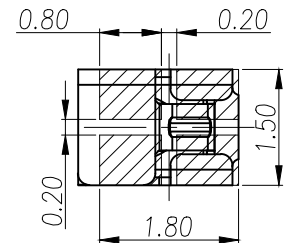
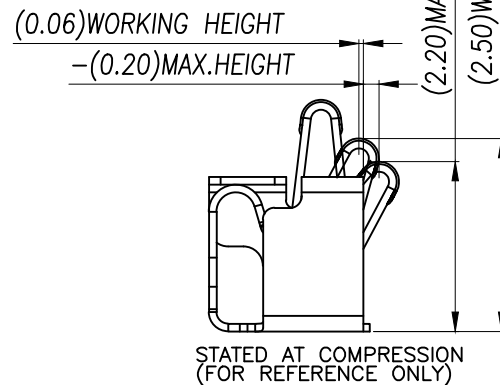

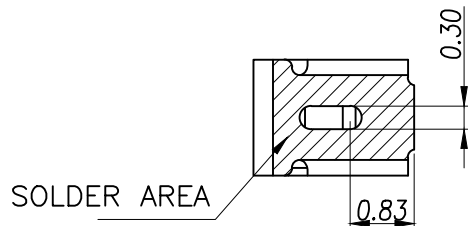
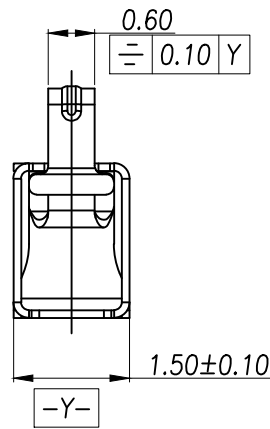


NOTES

- (1) MATERIAL: C5210 THICKNE=0.10mm
- (2) PRODUCT SPECIFICATIONS:
 - 2-1: RATED CURRENT: 1.0A
 - 2-2: VOLTAGE RATING: 1.50V
 - 2-3: CONTACT RESISTANCE: 80mΩ/MAX
 - 2-4: WELDING THRUST: ≥3KG
 - 2-5: OPERATING TEMPERATURE: -40°C~+85°C
 - 2-6: DURABILITY: 1500 CYCLES
- (3) SALT SPRAY: 24 HOURS
- (4) FINISH: 50u"Min NICKEL UNDERPLATING OVER ALL.
- (5) REQUIREMENTS
 - 5-1: TERMINAL TO EAT FULL TIN, NOT PEELING
 - 5-2: WELDING OBVIOUS COLOR AND OTHER ADVERSE
 - 5-3: ROHS, REACH, HF HALOGEN ADVERSE OF DOMESTIC AND INTERNATIONAL ENVIRONMENTAL REQUIREMENTS

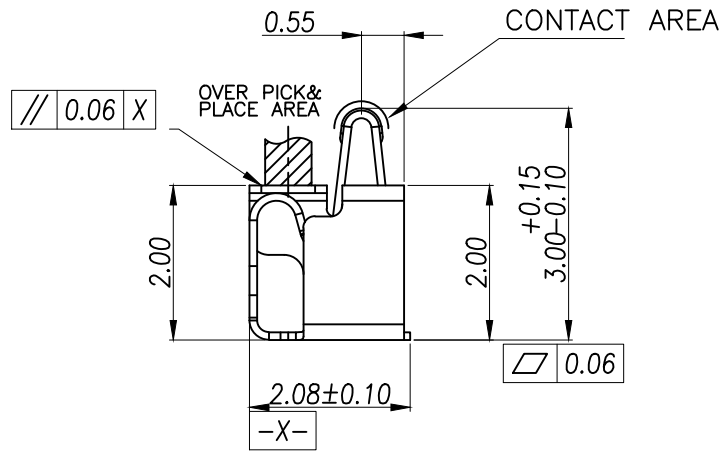

RECOMMENDED PCB LAYOUT
TOLERANCE ±0.05 (銅箔公差)

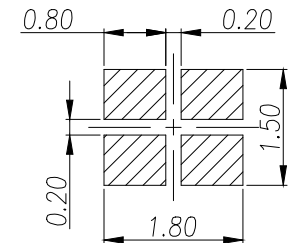


METAL MASK T=0.10
TOLERANCE ±0.05 (銅網公差)

GENERAL TOLERANCES (UNLESS SOECIFIED)		SCALE: 1:1 UNIT: MM		 瑾珩精密	
DISTANCE ANGLE		DRAWN BY			
X. ±0.30 X.* ±2.0°		LUDAH		TITLE: 天线弹片	
.X ±0.20 .X* ±1.0°		CHECKED BY			
.XX ±0.15 .XX* ±0.5°		/		MANUFACTURE DWG	
DRAFT WHERE APPLICABLE APPROVED BY					
MUST REMAIN				PART NO.	
WITHIN DIMENSIONS		LUJIAH		TP-T1-3031	
				SCALE	
				N:A	
				SHEET	
				1:2	





CONN. QTY./REEL	REEL QTY./CARTON	CONN. QTY./CARTON
6500	20	130,000

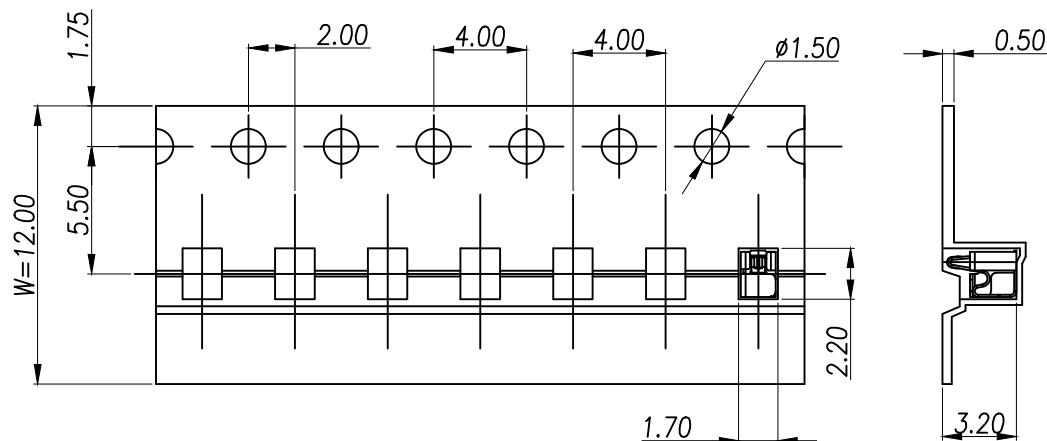

PRODUCT PACKAGING DIRECTION
CUSTOMER TO USE DIRECTION

TOTAL
20LAYERS

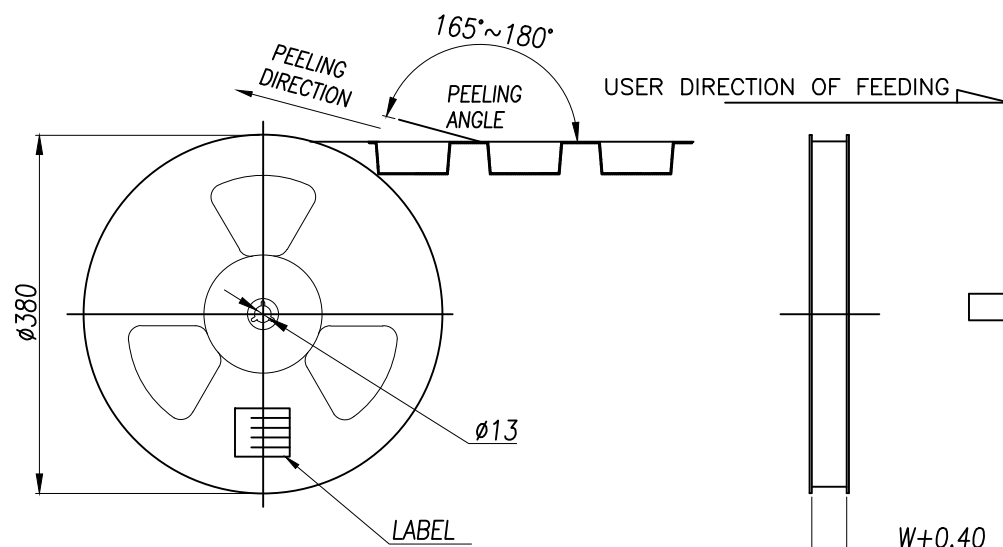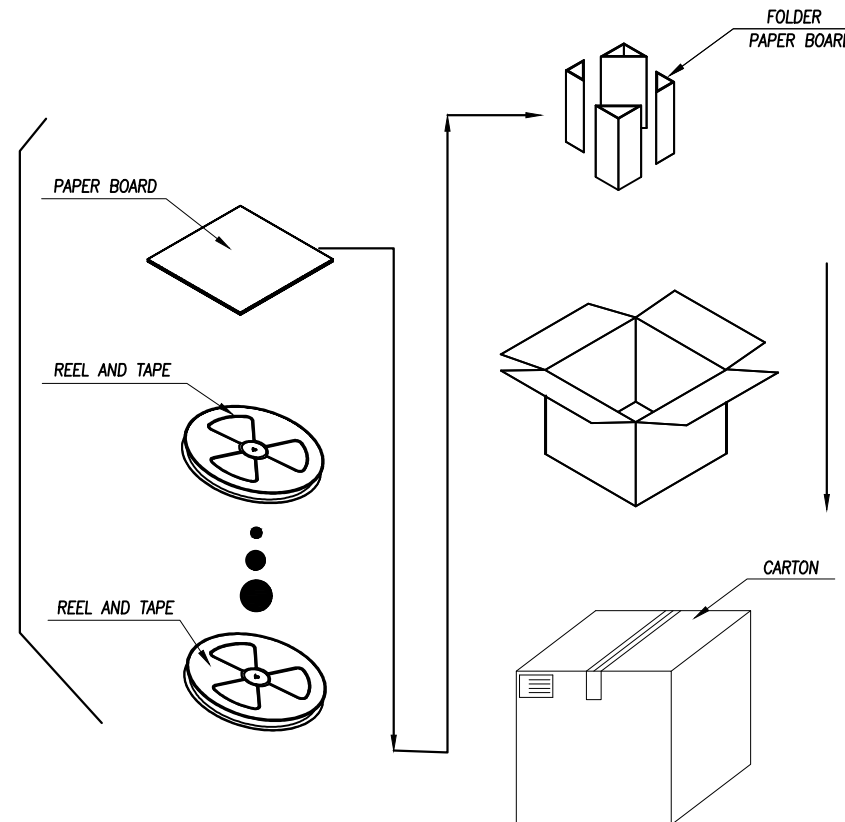

GENERAL TOLERANCES (UNLESS SOECIFIED)	SCALE: 1:1 UNIT: MM		 瑾珩精密	
	DRAWN BY LUDAH			
	CHEVKED BY /		TITLE: 天线弹片 H3.00 ANTENNA SPRING TERMINAL,SMT T=0.10MM	MANUFACTURE DWG
	DRAFT WHERE APPLICABLE APPROVED BY MUST REMAIN WITHIN DIMENSIONS		PART NO. TP-T1-3031	SCALE N:A