

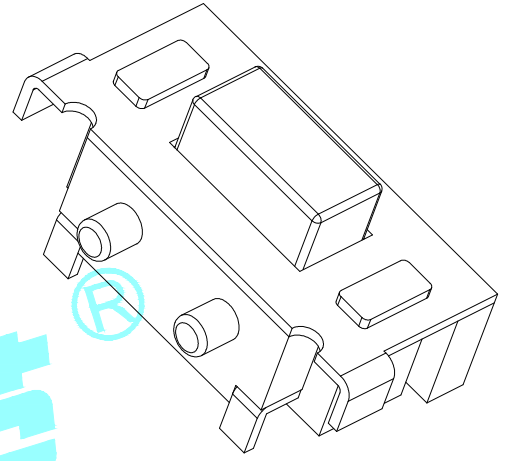
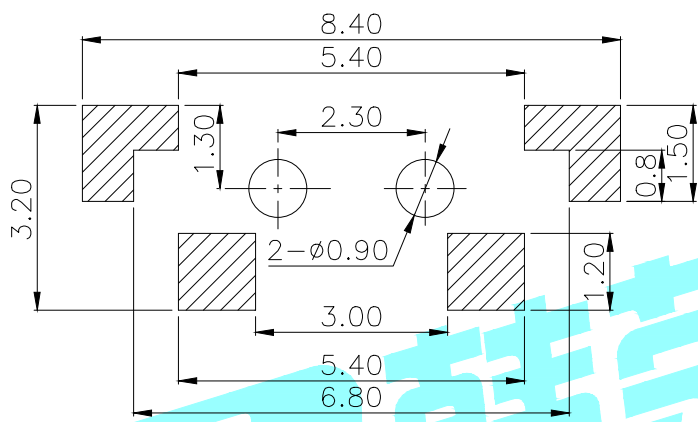
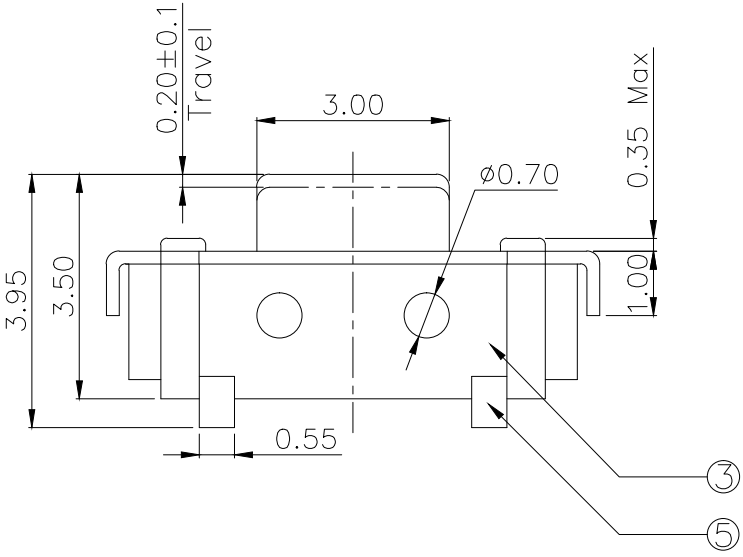


ROHS

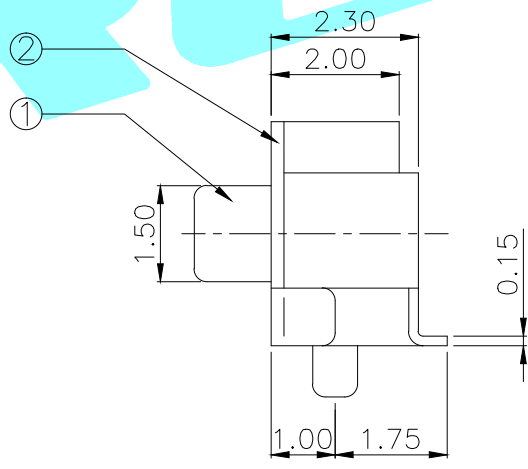

PCB Layout recommended

Circuit diagram

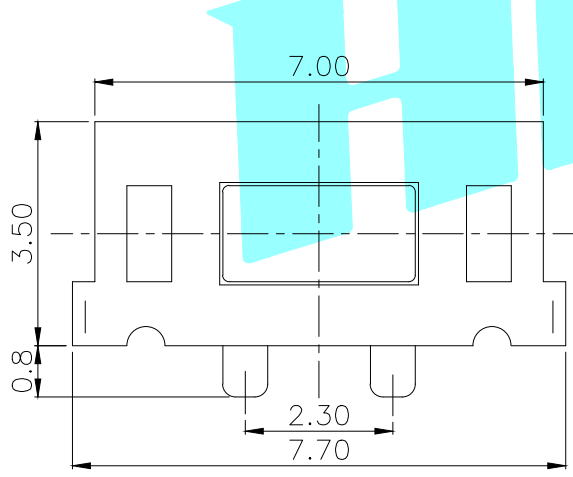

NO.1	
PART NO	vigor
1	90±30
2	130±30
3	180±30
4	250±30
5	350±50

NO.3-NO.4	
PART NO	NOTE
01~99	SERIAL NUMBER

NO.2	
PART NO	MATERIAL/QTY
S	SUS/1PC
D	SUS/2PCS

PART NO.	
K2-1112SA	K2-1112SN

5	Terminal	—	2	Phosphor Bronze	Plating silver	—
4	Contact	—	2	F.Ag/SUS	Natural	—
3	Base	—	1	LCP	White	—
2	Cover	—	1	Brass(0.20t)	Plating Nickel	—
1	Keystoke	—	1	LCP	Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE		HRO® ELECTRONICS CO.,LTD			
DRAWN	JKUN.LU	2015.3.28					
CHECKED			TITLE:		TACT SWITCHES		
APPROVALS			PART NO.		K2-1112S□-A□□W-□□		
TOLERANCES ARE		30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
		10~30	±0.20				
		5~10	±0.15				
		~ 5	±0.10				
		±2'	DRAWING NO.		_____	SHEET 1 OF 1	

—	A	—	NEW	—	—	—
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.