

A

B








C

D

E

F

G

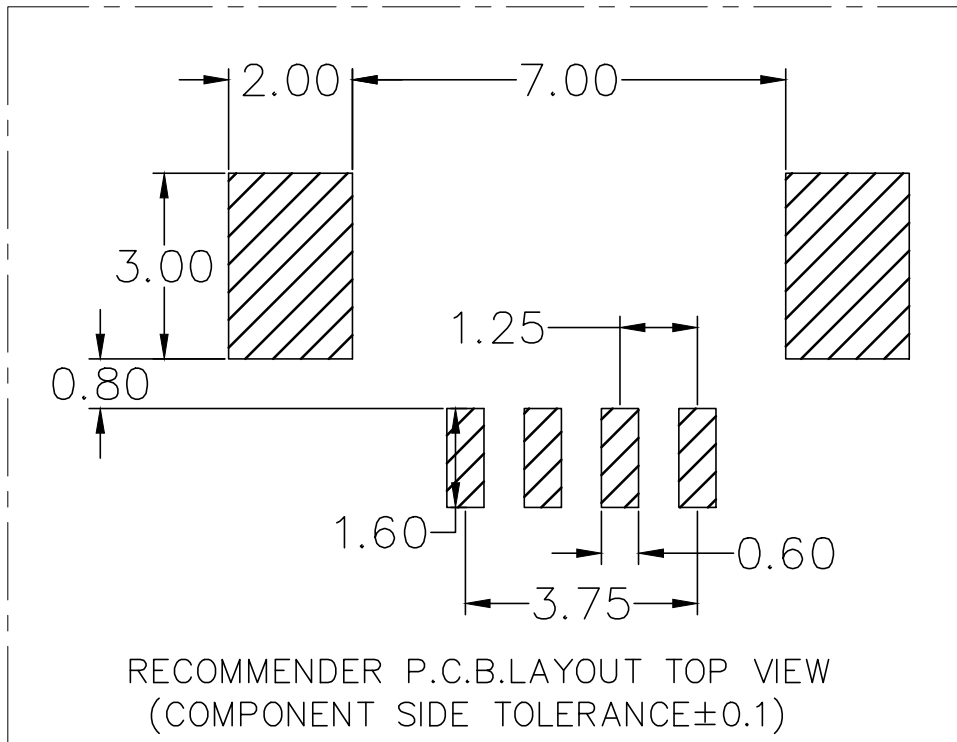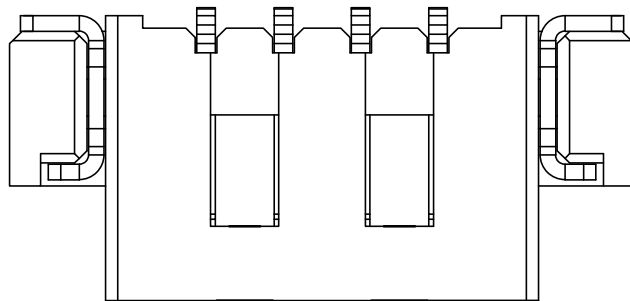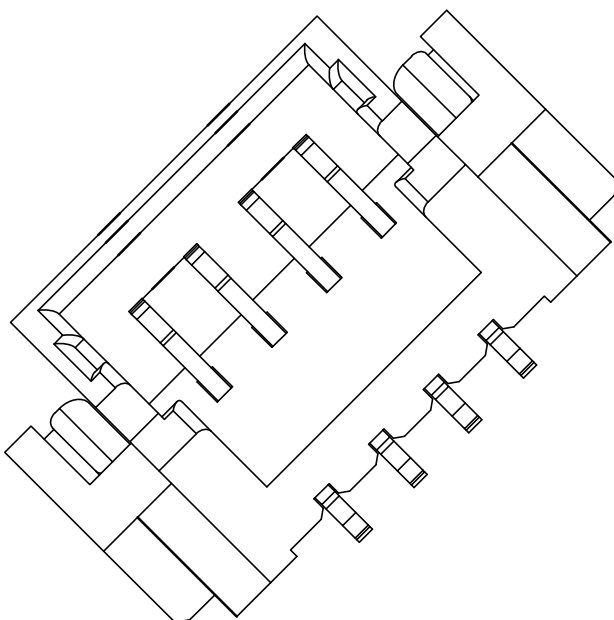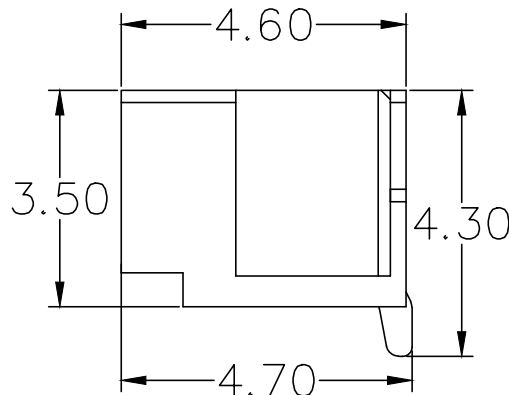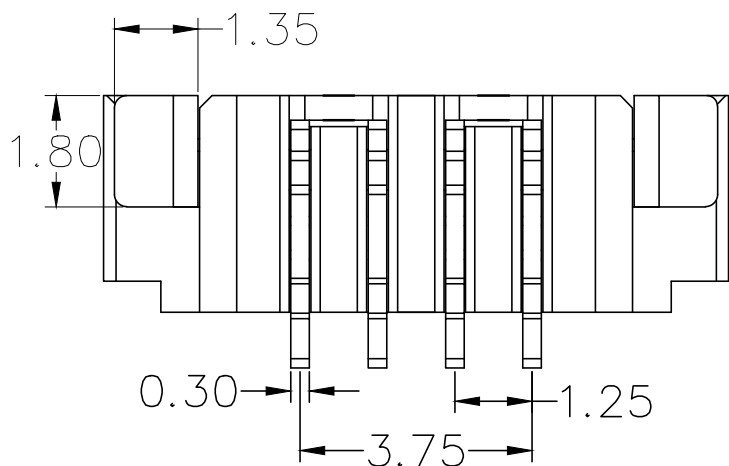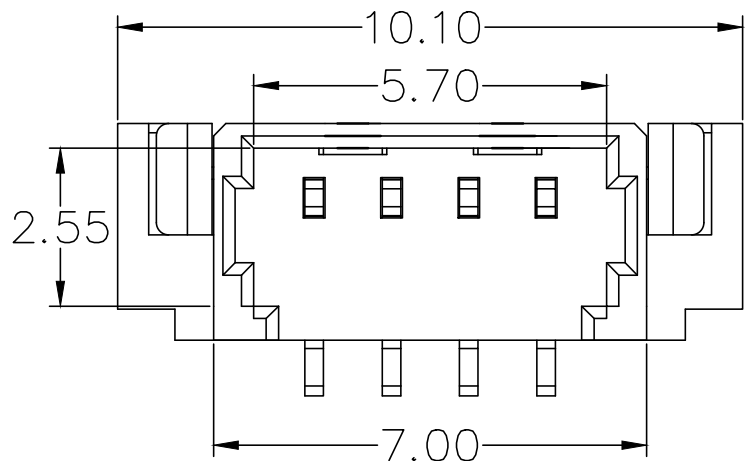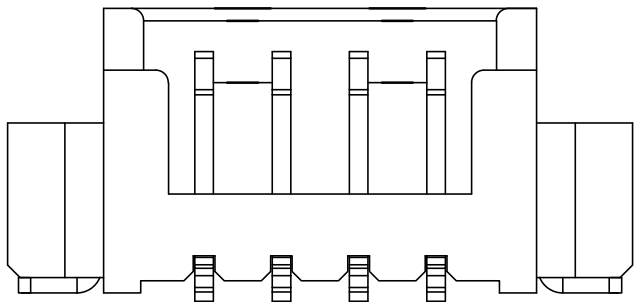

RECOMMENDER P.C.B.LAYOUT TOP VIEW
(COMPONENT SIDE TOLERANCE±0.1)

标 记
MARK

ECN编号/变更内容
ECN NO/DEFINITION

修 改
REVISE

日 期
DATE

核 准
APPROVE

PIN 数	A±0.1	B±0.1	C±0.1
2P	7.60	4.50	1.25
3P	8.85	5.75	2.50
4P	10.10	7.00	3.75
5P	11.35	8.25	5.00
6P	12.60	9.50	6.25

Specifications:

Rated Voltage : 125V AC/DC

Rated Current : 1A AC,DC

Withstand Voltage : 200V AC/minute

Contact Resistance : 50mΩ(MAX.)

Insulation Resistance : 100MΩ(MIN.)

Storage Temperature Range: -40℃~+85℃;

Operation Temperature Range: -25℃~+70℃;

2	插针	铜	镀镍锡	
1	基座	LCP	本色	
序 号	品 名	材 质	电镀/颜色	备 注



深圳市虹成电子有限公司

品 名 TITLE	针座
料 号 PART NO	HCZZ0015-4

UNLESS OTHERWISE,
GENERAL TOLERANCE:

X. xxx ±0.05
X. xx ±0.15
X. x ±0.25

ANGULAR:

X. xx° ±1°
X. x° ±3°
X. ° ±5°

比 列
SCALE

1:1

单 位
UNIT

MM

张 数
PART NO

1 OF 1

版 本
REV

A

制 图
DRAW

AhYe

审 核
CHECKED

夏操云

批 准
APPROVE

赵亮亮

