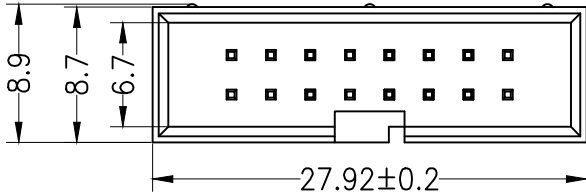
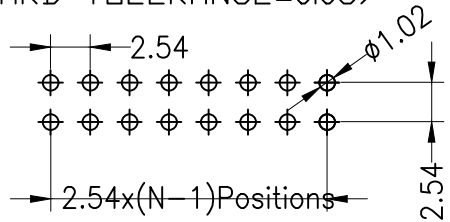
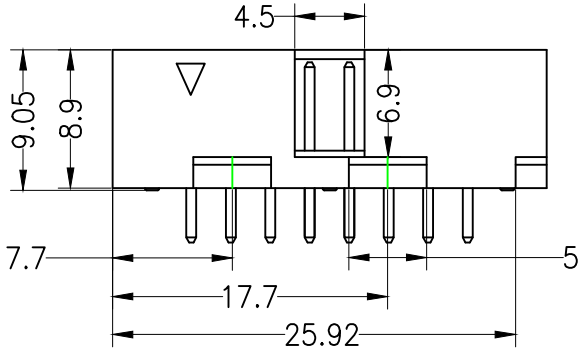
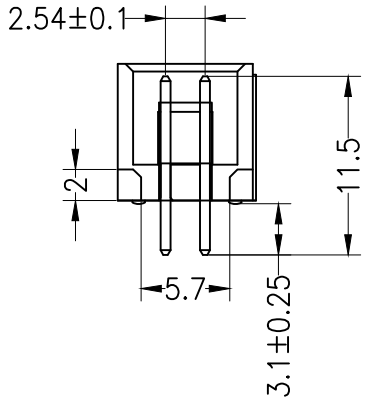


	1	2	3	4	5	6	7	8	9				
G	RoHS		Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)							G			
F	SPECIFICATIONS Rated Current:3.0AMP Contact Resistance:20mΩ Max Withstand Voltage:1000V AC/DC Insulation Resistance:1000MΩ Min Operation Temperature:-40° c to +105° c									F			
E	Contact Material:Brass Contact Plating:铜镀锡 Over Ni Insulator Material:Polyester(UL94V-0) Standard: PA6T Max.Processing Temp: 230° C for 30-60 seconds (260° C for 10 seconds)									E			
D										D			
C										C			
B										B			
A					OPERATION		DRAW			SCALE	FIT	深圳市连盛精密连接器有限公司	
					X.X	±0.30				UNIT	mm		
					X.XX	±0.20	CHECK			SIZE	A4	PART NO. 1030300217	
	A0	2012.03.28	NEW DRAWING		X.XXX	±0.10				SHEET	1/1		
	REV	DATE	MODIFICATION		CHANGE	Angle	±3°	APPROVE			PROJ.	◆	TITLE: 2.54Box 16P H8.8mm 180度 铜镀锡 PA6T
		DESCRIPTION			DIM	TOL							
	1	2	3	4	5	6		7	8	9			