










ROHS




3D VIEW

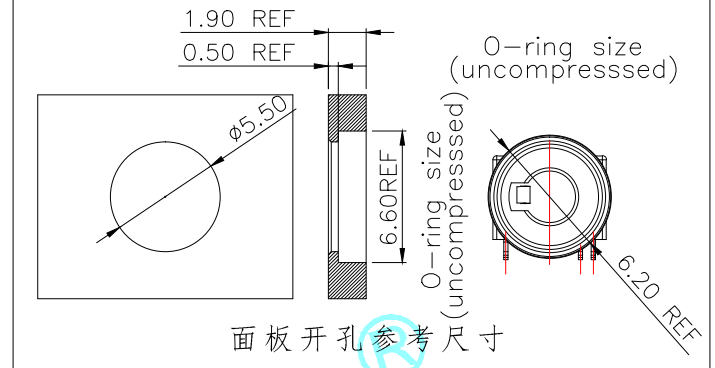


面板开孔参考尺寸

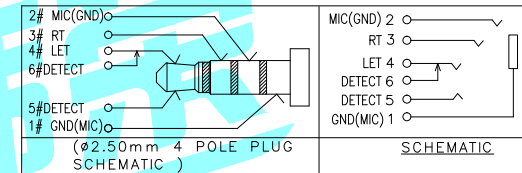

- CONTACT CURRENT RATING: 1A.
- CONTACT RESISTANCE: 100 mΩ MAX.;
- INSULATION RESISTANCE: 100MΩ MIN.;
- DIELECTRIC WITHSTANDING: 500V AC MIN.;
- DURABILITY: 5,000 CYCLES MIN.;
- CONNECTOR MATING FORCES: 30N MAX.;
- CONNECTOR UNMATING FORCES: 3N MIN.;
- TERPROOF LEVEL: IPX7;

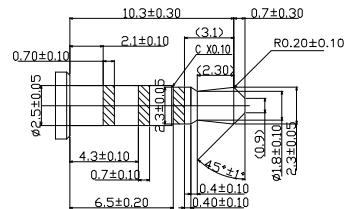

(ø2.50mm 4 POLE PLUG DETAIL DRAWING)

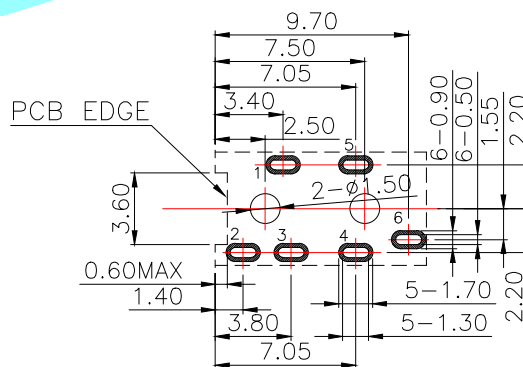

P.C.B LAYOUT(TOP view)

④	Waterproof ring	1	Silica gel	Black	
③	Other Terminal	4	SUS	Ni/Au Plating	
②	Terminal 2#/3#	2	Phosphor bronze	Ni/Au Plating	
①	Housing	1	High temperature plastic	Black	
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING
APPROVALS		DATE		HRO 韩豪®	
DRAWN		LIUCAN		2022.9.15	
CHECKED				TITLE: PHONE JACKES	
APPROVALS				PART NO. PJ-260	
TOLERANCES ARE		30~以上 ±0.30 10~30 ±0.20 5~10 ±0.15 ~ 5 ±0.10		ANGLE UNIT: mm SCALE: 1:1 PROJ: 1 OF 1	

ECN NO.	REV.	DATE.	NEW DESCRIPTION.	CHANGE.	CHECK.	APPRO.
---------	------	-------	------------------	---------	--------	--------