



THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF L-COM, INC. ANY REPRODUCTIONS IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF L-COM, INC. IS PROHIBITED.



REVISIONS			
REV	DESCRIPTION	DATE	CHANGED BY
A	INITIAL RELEASE	07/11/17	JLABOY

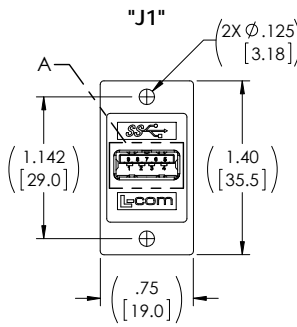


USB3.0 SERIES "A" RECEPTACLE BULKHEAD ADAPTOR CONTACTS: 30 μINCHES GOLD PLATING




RECOMMENDED PANEL CUT OUT

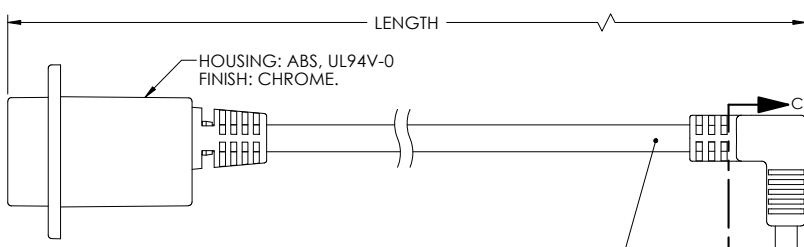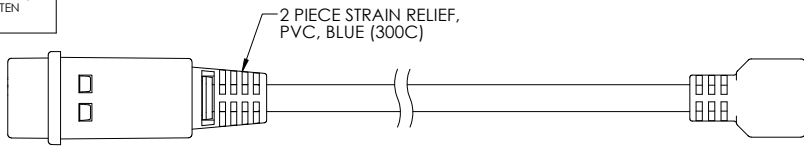


UL 20276,
 (2) SHIELDED TWISTED PAIRS, 30AWG WITH ALUMINUM MYLAR SHIELD STRANDED TINNED COPPER AND DRAIN WIRE,
 (1) UNSHIELDED TWISTED PAIR, 30AWG, STRANDED TINNED COPPER,
 (2) CONDUCTORS, 24AWG, STRANDED TINNED COPPER, WITH ALUM/POLY FOIL SHIELD AND OVERALL BRIAID SHIELD OUTER JACKET: PVC, BLUE (PANTONE 300C)

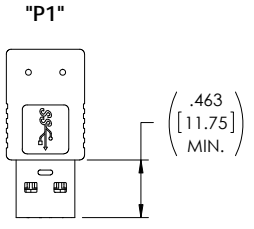


USB3.0 SERIES "A" PLUG DOWN EXIT CONTACTS: 30 μINCHES GOLD PLATING




DETAIL A SCALE 2 : 1




DETAIL B SCALE 2 : 1

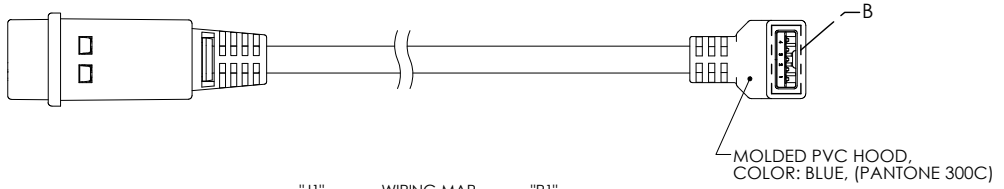

MOLDED PVC HOOD, COLOR: BLUE, (PANTONE 300C)

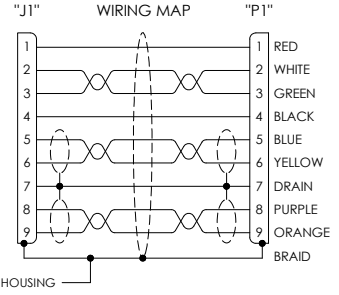

PART NUMBER	LENGTH	
	INCHES	MM
U3A00034-12I	12.0	[304.8]
U3A00034-24I	24.0	[609.6]
U3A00034-36I	36.0	[914.4]
U3A00034-50I	50.0	[1270.0]



SECTION C-C

NOTES:
 1. OPERATING TEMPERATURE: -10°C TO +70°C
 2. CABLE ASSEMBLY SHALL BE TESTED FOR CONTINUITY.
 3. CABLE ASSEMBLY SHALL BE INDIVIDUALLY PACKAGED IN ACCORDANCE WITH L-COM SPECIFICATION PS-0031.

REGULATORY COMPLIANCE:
 CE2011/65/EU (RoHS DIRECTIVE)

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES (mm)	APPROVALS	DATE
OVERALL CABLE LENGTH TOLERANCE: $\pm 1/2$ (305) ± 1 (25) / 0 $\pm 1/2$ (305) $\pm 1/2$ (127) $\pm 1/2$ (127) $\pm 1/2$ (127) / 0 $\pm 1/2$ (305) $\pm 1/2$ (127) $\pm 1/2$ (127) $\pm 1/2$ (127) / 0 $\pm 1/2$ (305) $\pm 1/2$ (127) $\pm 1/2$ (127) $\pm 1/2$ (127) / 0 $\pm 1/2$ (305) $\pm 1/2$ (127) $\pm 1/2$ (127) $\pm 1/2$ (127) / 0	DRAWN BY S.JI	06/07/17
ALL OTHER DIMENSIONAL TOLERANCES: $\pm .005$ (0.127) $\pm .005$ (0.127) $\pm .005$ (0.127)	CHECKED BY B.ZHANG	06/07/17
PROJECTION	APPROVED BY S.PAN	06/07/17
	CONFIGURATION DETAILS OF UNDIMENSIONED FEATURES MAY VARY	
	COLOR VARIATIONS MAY OCCUR	

L-com Global Connectivity 50 HIGH STREET NORTH ANDOVER, MA 01845

CATEGORY: USB

PRODUCT DESCRIPTION: USB3.0 A-F PNL MNT/90DN A-M SHLD

SIZE	FSCM NO.	DWG. NO.	REV.
B	43321	U3A00034	A

SCALE: NONE CAD FILE: U3A00034.SLDRAW SHEET 1 OF 1