

B5817W THRU B5819W

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

SOD-123 Surface Mount Schottky Barrier Rectifier

Features

- V_R 20V/30V/40V
- $I_{F(AV)}$ 1A
- Low profile package
- Ideal for automated placement
- Low forward and reverse recovery times

Reverse Voltage
20/30/40 V
Forward Current
1.0 Ampere

Applications


These Schottky barrier diodes are designed for high speed switching applications, circuit protection, and voltage clamping.

Mechanical Data



- Case: SOD-123
Molding compound meets UL 94V-0 flammability rating, RoHS-compliant, halogen-free
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Cathode line denotes the cathode end

Function Diagram

SOD-123



Marking:
B5817W:SJ
B5818W:SK
B5819W:SL



Maximum Ratings (Ta=25°C Unless otherwise specified)

PARAMETER	SYMBOL	UNIT	B5817W	B5818W	B5819W
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	V	20	30	40
Maximum RMS Voltage	V_{RMS}	V	14	21	28
Maximum DC Blocking Voltage	V_{DC}	V	20	30	40
Maximum Average Forward Rectified Current	$I_{F(AV)}$	A	1.0		
Non-repetitive Peak Forward Surge Current @t=8.3ms Half-sine wave	I_{FSM}	A	9.0		
Power Dissipation	P_d	mW	500		
Storage temperature	T_{stg}	°C	-55~+150		
Junction temperature	T_j	°C	-55 ~+150		
Typical Thermal Resistance	$R_{\theta J-A}$	°C /W	250		

B5817W THRU B5819W

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

● **Electrical Characteristics** (Ta=25°C Unless otherwise noted)

PARAMETER	TEST CONDITIONS	SYMBOL	UNIT	B5817W	B5818W	B5819W
Maximum instantaneous forward voltage	I _F =1.0A	V _{F1}	V	0.45	0.55	0.6
	I _F =3.0A	V _{F2}		0.75	0.875	0.9
Maximum DC reverse currentat rated DC blocking voltage	V _R =V _{DC} , T _A =25°C	I _{R1}	mA	1.0		
	V _R =V _{DC} , T _A =100°C	I _{R2}		10		
Typical junction capacitance	V _R =4.0V,f=1MHz	C _J	pF	120		

● **Ratings And Characteristics Curves** (Ta=25°C Unless otherwise specified)

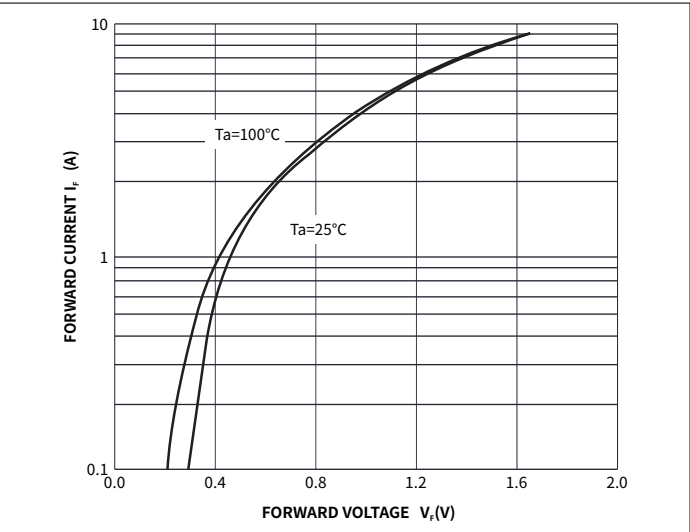


Fig.1 Typical Instantaneous Forward Characteristics

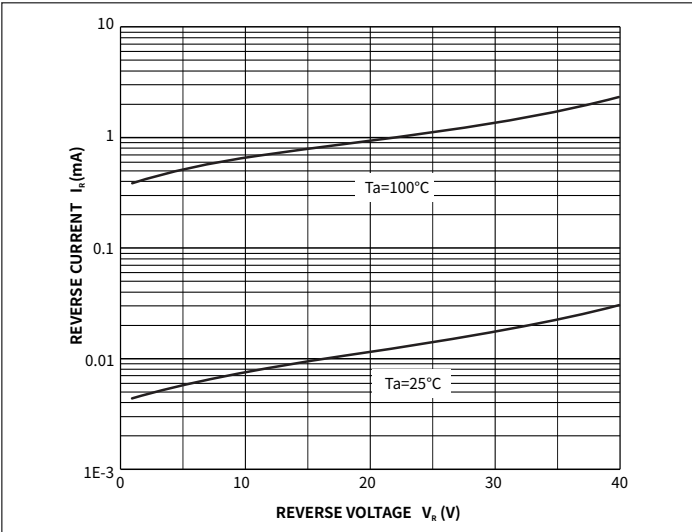


Fig.2 Typical Reverse Characteristics

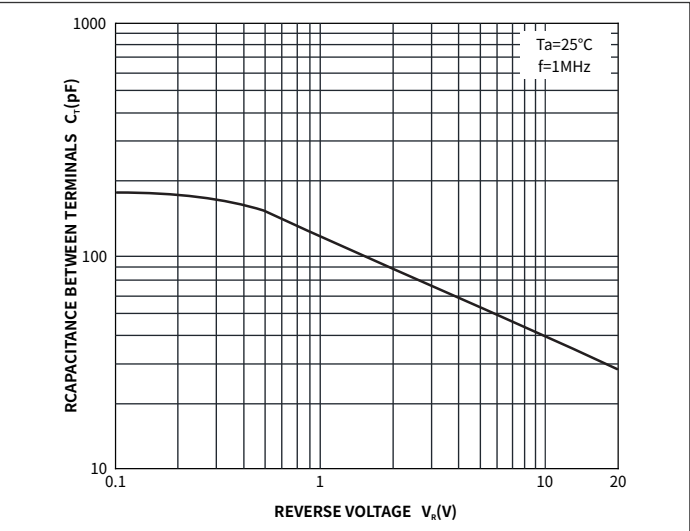


Fig.3 Typical Junction Capacitance

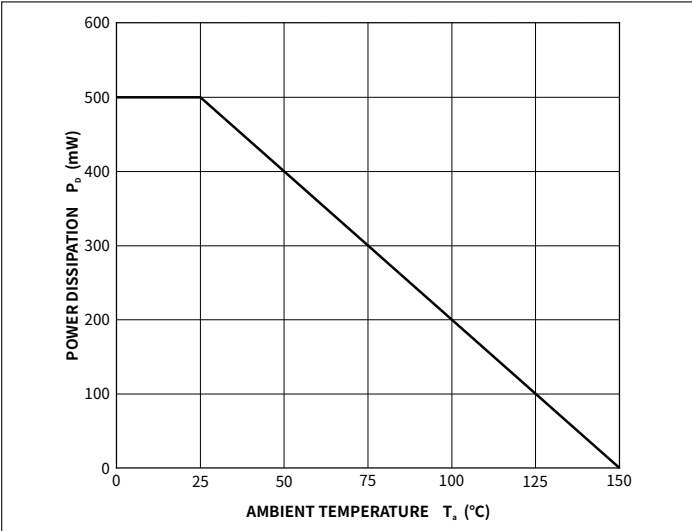


Fig.4 Power Derating Curve

B5817W THRU B5819W

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER



Ordering Information

PACKAGE	PACKAGE CODE	UNIT WEIGHT(g)	REEL(pcs)	BOX(pcs)	CARTON(pcs)	DELIVERY MODE
SOD-123	R1	0.012	3000	45000	180000	7"

Package Outline Dimensions (SOD-123)

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
A	3.55	3.85	0.140	0.152
B	2.55	2.85	0.100	0.112
C	1.40	1.80	0.055	0.071
D	0.95	1.35	0.140	0.152
E	0.51	0.71	0.037	0.053
F	-	0.15	-	0.006
G	0.15	0.45	0.006	0.008
H	0.08	0.25	0.003	0.010
θ	-	8°	-	8°

Suggested Pad Layout

Symbol	Dimensions			
	Millimeters		Inches	
	Min.	Max.	Min.	Max.
J	0.91	-	0.036	-
K	-	2.36	-	0.092
M	1.22	-	0.048	-