



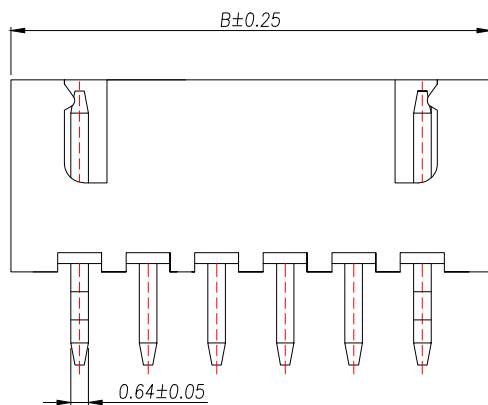


		D		E	
REV.	DESCRIPTION	ECN NO.	NAME	DATE	




Part No	Pin	A	B
WF-1A254A2P	2	2.50	7.50
WF-1A254A3P	3	5.00	10.00
WF-1A254A4P	4	7.50	12.50
WF-1A254A5P	5	10.00	15.00
WF-1A254A6P	6	12.50	17.50
WF-1A254A7P	7	15.00	20.00
WF-1A254A8P	8	17.50	22.50
WF-1A254A9P	9	20.00	25.00
WF-1A254A10P	10	22.50	27.50
WF-1A254A11P	11	25.00	30.00
WF-1A254A12P	12	27.50	32.50
WF-1A254A13P	13	30.00	35.00
WF-1A254A14P	14	32.50	37.50
WF-1A254A15P	15	35.00	40.00
WF-1A254A16P	16	37.50	42.50
WF-1A254A17P	17	40.00	45.00
WF-1A254A18P	18	42.50	47.50
WF-1A254A19P	19	45.00	50.00
WF-1A254A20P	20	47.50	52.50

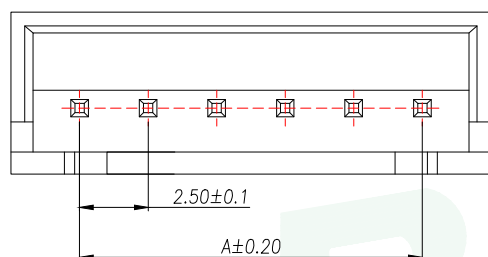


技术要求:

1. 零件材料: PA66 (UL-94V-0)
2. 接触件: 黄铜镀锡
3. 接触电阻: $< 10\text{m}\Omega$
4. 绝缘电阻: $> 100\text{M}\Omega$
5. 额定电压: 250V AC DC
6. 额定电流: 2.0A AC DC
7. 耐压: 能承受 1000V AC/Minute
8. 工作温度: $-25^{\circ}\sim +85^{\circ}$
9. 可焊性试验: 浸锡面积 $> 95\%$ 温度 235°C , 时间 $2.5 \pm 0.5\text{s}$
10. 铅和锡等六大有害物质含量要符合环保要求.



SUGGESTED PCB LAYOUT
(COMPONENT SIDE)

2	Contact	Brass	n*1	电镀(锡): 整个表面镀底镍30u"MIN,再镀锡80u".MIN.
1	Wafer	PA66(UL94V-0)	1	本色
序号	名称	材料	数量	附注

GENERAL TOLERANCE		DONGGUAN BAOXUN PRECISION TECHNOLOGY CO., LTD			 		
DIM.	TOL.	TITLE: WAFER XH2.54MM 直针					
X							
X.X	±0.30						
X.XX	±0.25						
X.XXX	±0.15						
GENERAL ANGLE: ±3°		DWG. NO.: WF-1A254ANP		DRAWN: MAX			
		PART NO.: WF-1A254ANP		CHECKED: ELLA			
		UNIT: mm	SCALE: none	SHEET: 1 of 1	DWG. SIZE: A4	LAYER: bxconn	APPROVED: WILL

