


TYPE B/2

Female connector – straight and angled – 16 and 32 positions

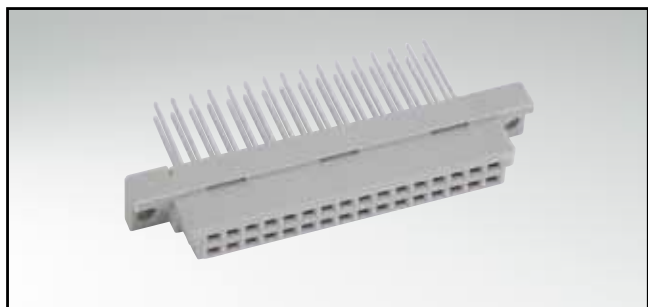


RoHS compliant

DESCRIPTION

- Solder pin, solder lug and wire wrap
- Quality class 3 (also available in quality class 2 or 1)
- Special assembly on request

PRODUCT DRAWING

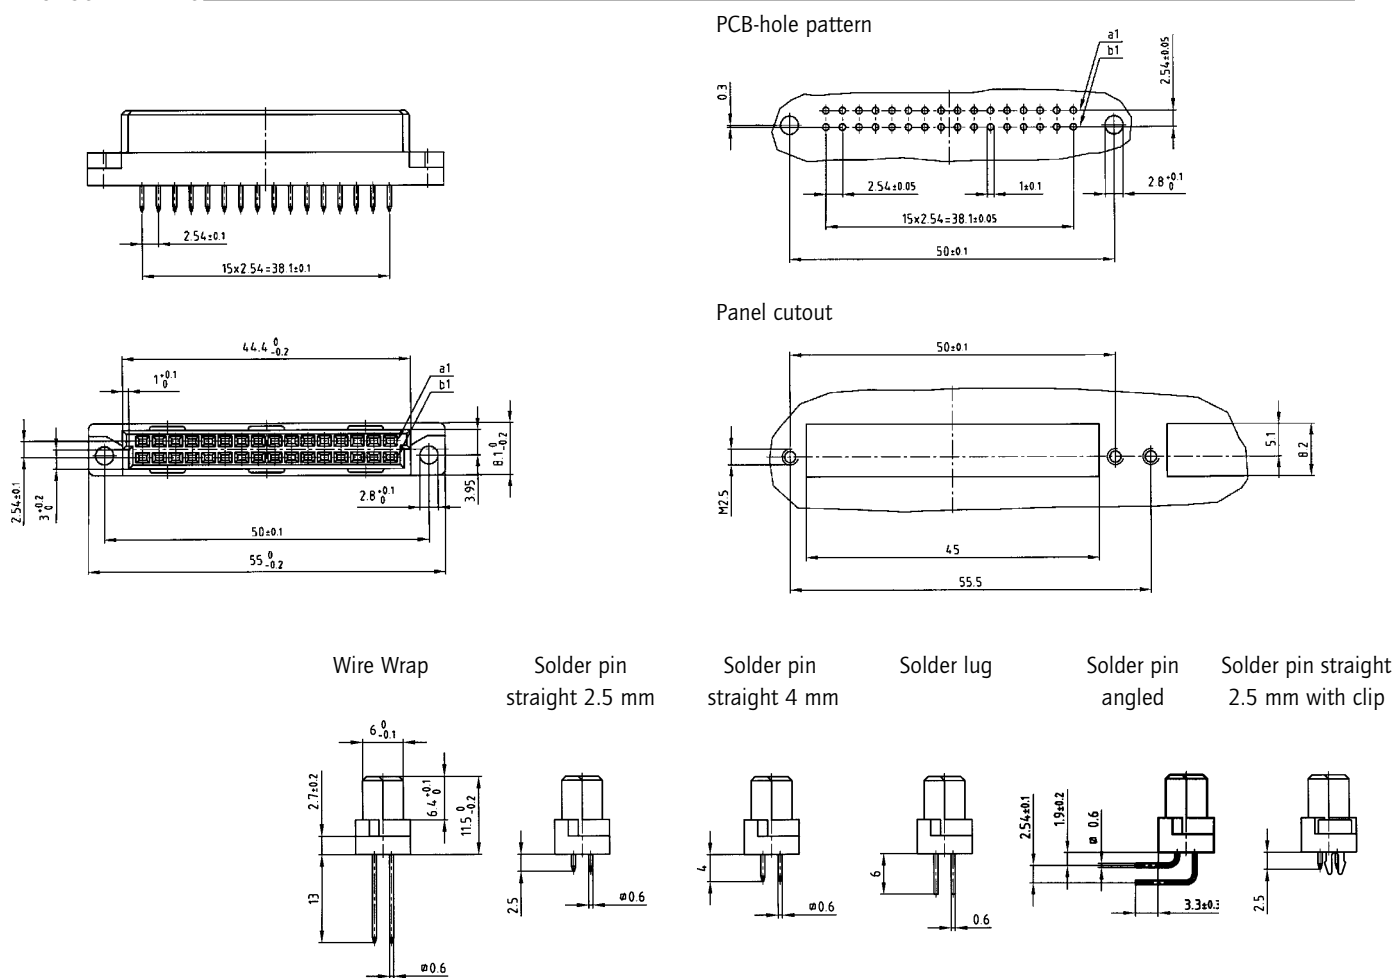

ORDER DATA

(Dim. = mm)

No. of Pos.	Row	• = contact, + = no contact						Wire Wrap	Solder pin straight 2.5 mm	Solder pin straight 4 mm	Solder lug	Solder pin angled	Solder pin straight 2.5 mm with clip	
		Pos.	1	2	3	4	5							...
16	a b		• +	• +	• +	• +	• +	• +	122 A 10419 X	122 A 10449 X	122 A 10479 X	122 A 10509 X	122 A 10539 X	122 A 13219 X
16	a b		+ +	• •	+ +	• •	+ +	• •	122 A 10429 X	122 A 10459 X	122 A 10489 X	122 A 10519 X	122 A 10549 X	122 A 13229 X
32	a b		• •	• •	• •	• •	• •	• •	122 A 10439 X	122 A 10469 X	122 A 10499 X	122 A 10529 X	122 A 10559 X	122 A 13239 X

Clip for hole diameter 2.8 ± 0.1 mm, PCB thickness = 1.6 mm

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Amphenol:](#)

[122A10559X](#) [122A10419X](#) [122A10509X](#) [122A10449X](#)