
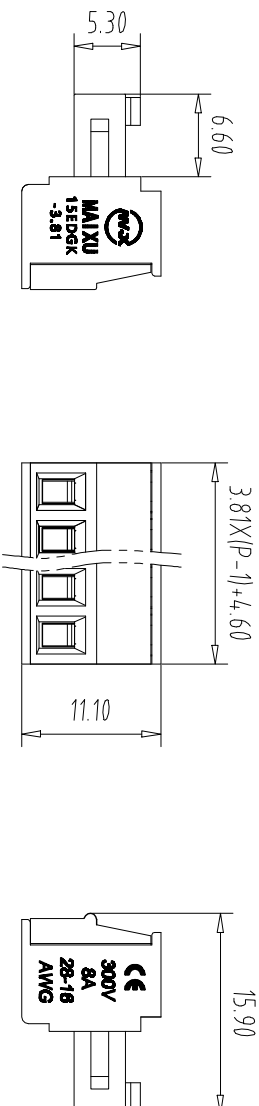


注：本型为禁止传输、复制、编辑、修改文件，以及利用其内容进行交流

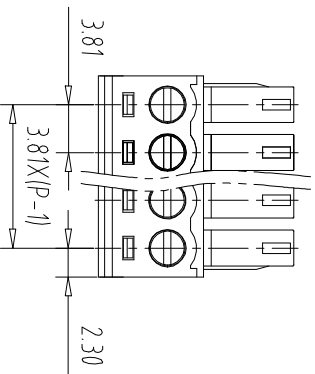

1. Use group	B	C	D
Rated Current	8A	/	8A
Rated Voltage	300V	/	300V

2. Torque value: M2.0, 1.77Lb.in

3. Wire range: 28~16AWG

IEC Standard

1. Pollution Degree	3	2	2
Overvoltage Category	III	III	II
Rate Impulse Voltage(KV)	2.5KV	2.5KV	2.5KV
Rate Voltage(V)	160V	160V	250V
Rate Current(A)	7A	7A	7A

2. Torque value: M2, 0.2Nm

3. wire range: 0.2~1.5mm²

NOTES2:

- 1.Housing: PA66 (UL94V-0)
- 2.Cover: PA66 (UL94V-0)
- 3.Cage: Brass (Ni Plated)
- 4.Clamp: Copper alloy (Ni Plated)
- 5.Screw: Steel (M2.0,Zn Plated)

NOTES3:

- 1.Pitch: 3.81mm Poles: 02-24P
- 2.Stripping length: 6-7mm
- 3.Operating temperature: -40℃~+105℃
- 4.RoHS Compliance

How to order

MX15EDGK - 3.81 - XXP - XXXX - XX - X - X - X

产品型号 间距 颜色: 01常規顏色 0:Y一字螺丝 A-Z其他定制

灰色:GY 橙色:OE 蓝色:BU 红色:RD 黑色:BK 透明色:TT 绿色:GN 黄色:YW 白色:WE

Cu:铜方块 1:S十字螺丝 2:P.S平头十字螺丝 Fe:铁方块

Pitch Range In mm	Nominal Dimension Range In mm	—	—
-------------------	-------------------------------	---	---

Over 6 TO 10	Over 10 TO 24	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150	Over 150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70
±0.30	±1.00	±1.30	±2°		

REV	EC.N NO.	CONTENT	CHK	DATE
-----	----------	---------	-----	------

NOTES1:

UL Standard

ITEM	NAME OF PART	NO. OF PART	Q.TY	MATERIAL	NOTE
DWG.	CHK	DATE	22.09.14	UNITS	MM
CHK	DATE	SCALE	1:1	A4	1/1
APP.	DATE	NAME	MX15EDGK-3.81-XXP		

CIIXI MAIXU ELECTRONICS CO.,LTD.



慈溪市迈旭电子有限公司

DWGNO.