

Conductive Sensors Level Probes Types VN, VNY, VPC, VPP

CARLO GAVAZZI



- 1 to 4 electrodes
- Isolated or unisolated electrodes
- Cable or screw connection
- 1/2", 1" or 1 1/2" without pipe thread according to ISO 228/1-Gxxx"



Product Description

Level sensor for measuring the level of conductive liquids, i.e. max./min. control of charging or discharging. The function is determined

by the amplifier relay used. The sensors are delivered with standard length electrodes - these are cut off to suit the application.

Ordering Key

VPC 110

Type _____
Housing material _____
Number of electrodes _____
Thread _____

Type Selection

Pipe thread	Electrode isolation	Housing Material	Ordering no. 1 electrode	Ordering no. 2 electrodes	Ordering no. 3 electrodes	Ordering no. 4 electrodes
1 1/2"	No	Nylon 6	VN 1	VN 2	VN 3	VN 4
1 1/2"	No	Nylon 6	VNY 1	VNY 2	VNY 3	VNY 4
1 1/2"	Polyethylene	Nylon 6	VNI 1	VNI 2	VNI 3	VNI 4
1 1/2"	Polyethylene	Nylon 6	VNYI 1	VNYI 2	VNYI 3	VNYI 4
1/2"	Polyethylene	PVC	VPC 105	VPC 205		
1"	Polyethylene	PVC	VPC 110	VPC 210	VPC 310	
1/2"	Kynar (PVDF)	Polypropylene	VPP 105	VPP 205		
1"	Kynar (PVDF)	Polypropylene	VPP 110	VPP 210	VPP 310	

Specifications

Electrodes		Environment	
Material	Stainless steel AISI316/DIN1.4401	Degree of protection	IP 67
Standard length		Operating temperature	
VN, VNY	100 cm	VN, VNY	0 to 90°C (32° to 194 °F)
VPC, VPP	50 cm	VPC	0 to 60°C (32° to 140 °F)
Diameter		VPP	0 to 100°C (32° to 212 °F)
VN, VNY	Ø 5 mm	Storage temperature	
VPC, VPP	Ø 4 mm	VN, VNY	-25° to 100°C (-13° to 212°F)
Housing		VPC, VPP	-20° to 110°C (-40° to 230°F)
Connection		Pressure	
VN	Cable (PVC), 2 m	VN, VNY, VPP	10 bar at 60°C
VNY, VPC, VPP	Screw terminals	VPC	2 bar at 60°C
		CE marking	IEC 529





Mode of Operation

The length of the electrodes determines the levels which will be detected and the amplifier chosen determines the function (see SV..., S195/196, S1961, ELA, ELC or ELD). If the container is made of a conductive material this can be used as common electrode.


Accessories

Extension joint for Ø5 mm electrodes (VN/VNI):
VD1

Dimensions

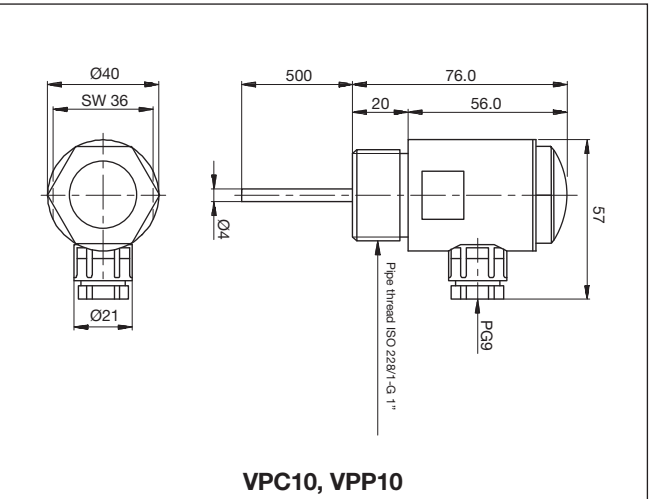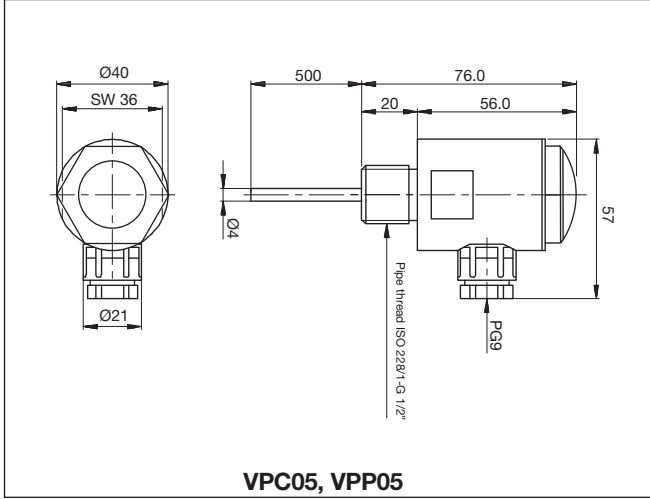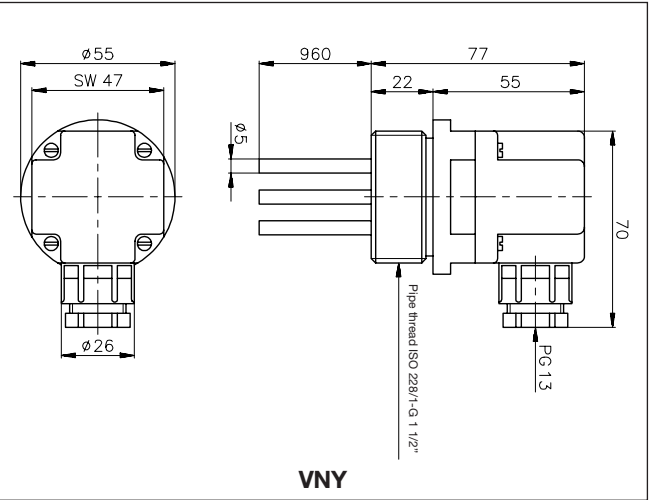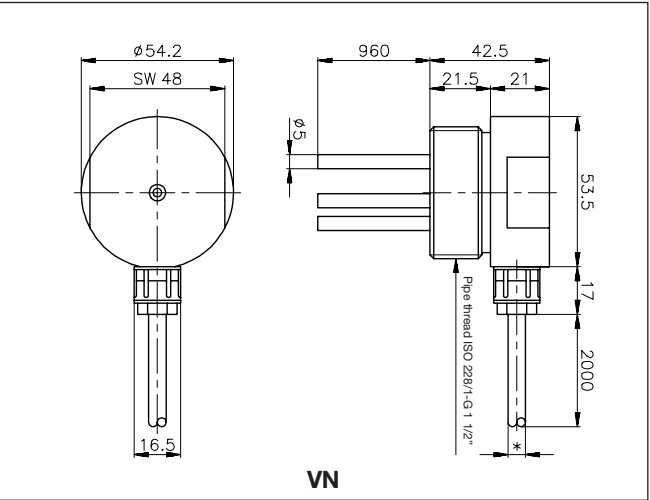

Wiring Diagrams

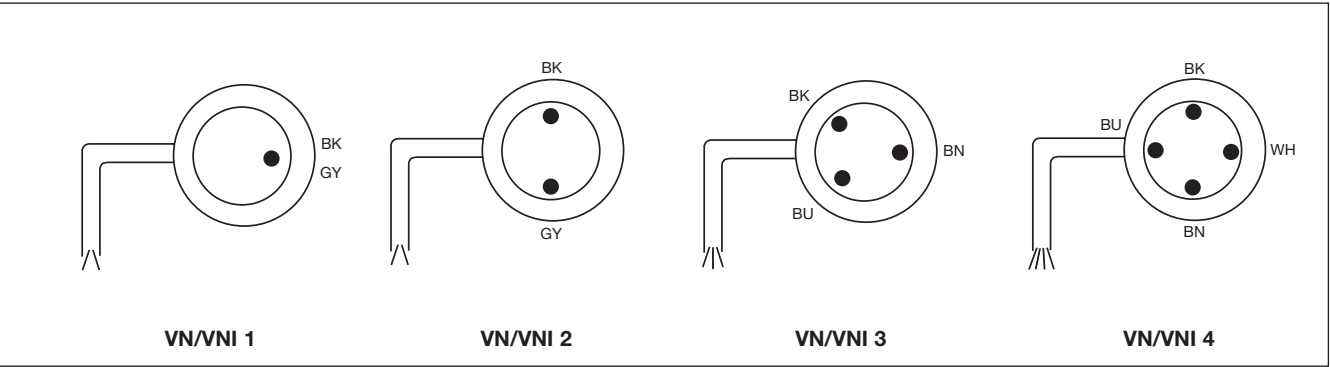

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Carlo Gavazzi:](#)

[VN4](#) [VPC105](#) [VPC205](#) [VPC210](#) [VNI2](#) [VNI4](#) [VNY2](#) [VNI3](#) [VNY3](#) [VN1](#) [VNYI1](#) [VNY1](#) [VPC110](#) [VPP210](#) [VPP310](#)
[VPC310](#) [VPP110](#) [VNI1](#)