


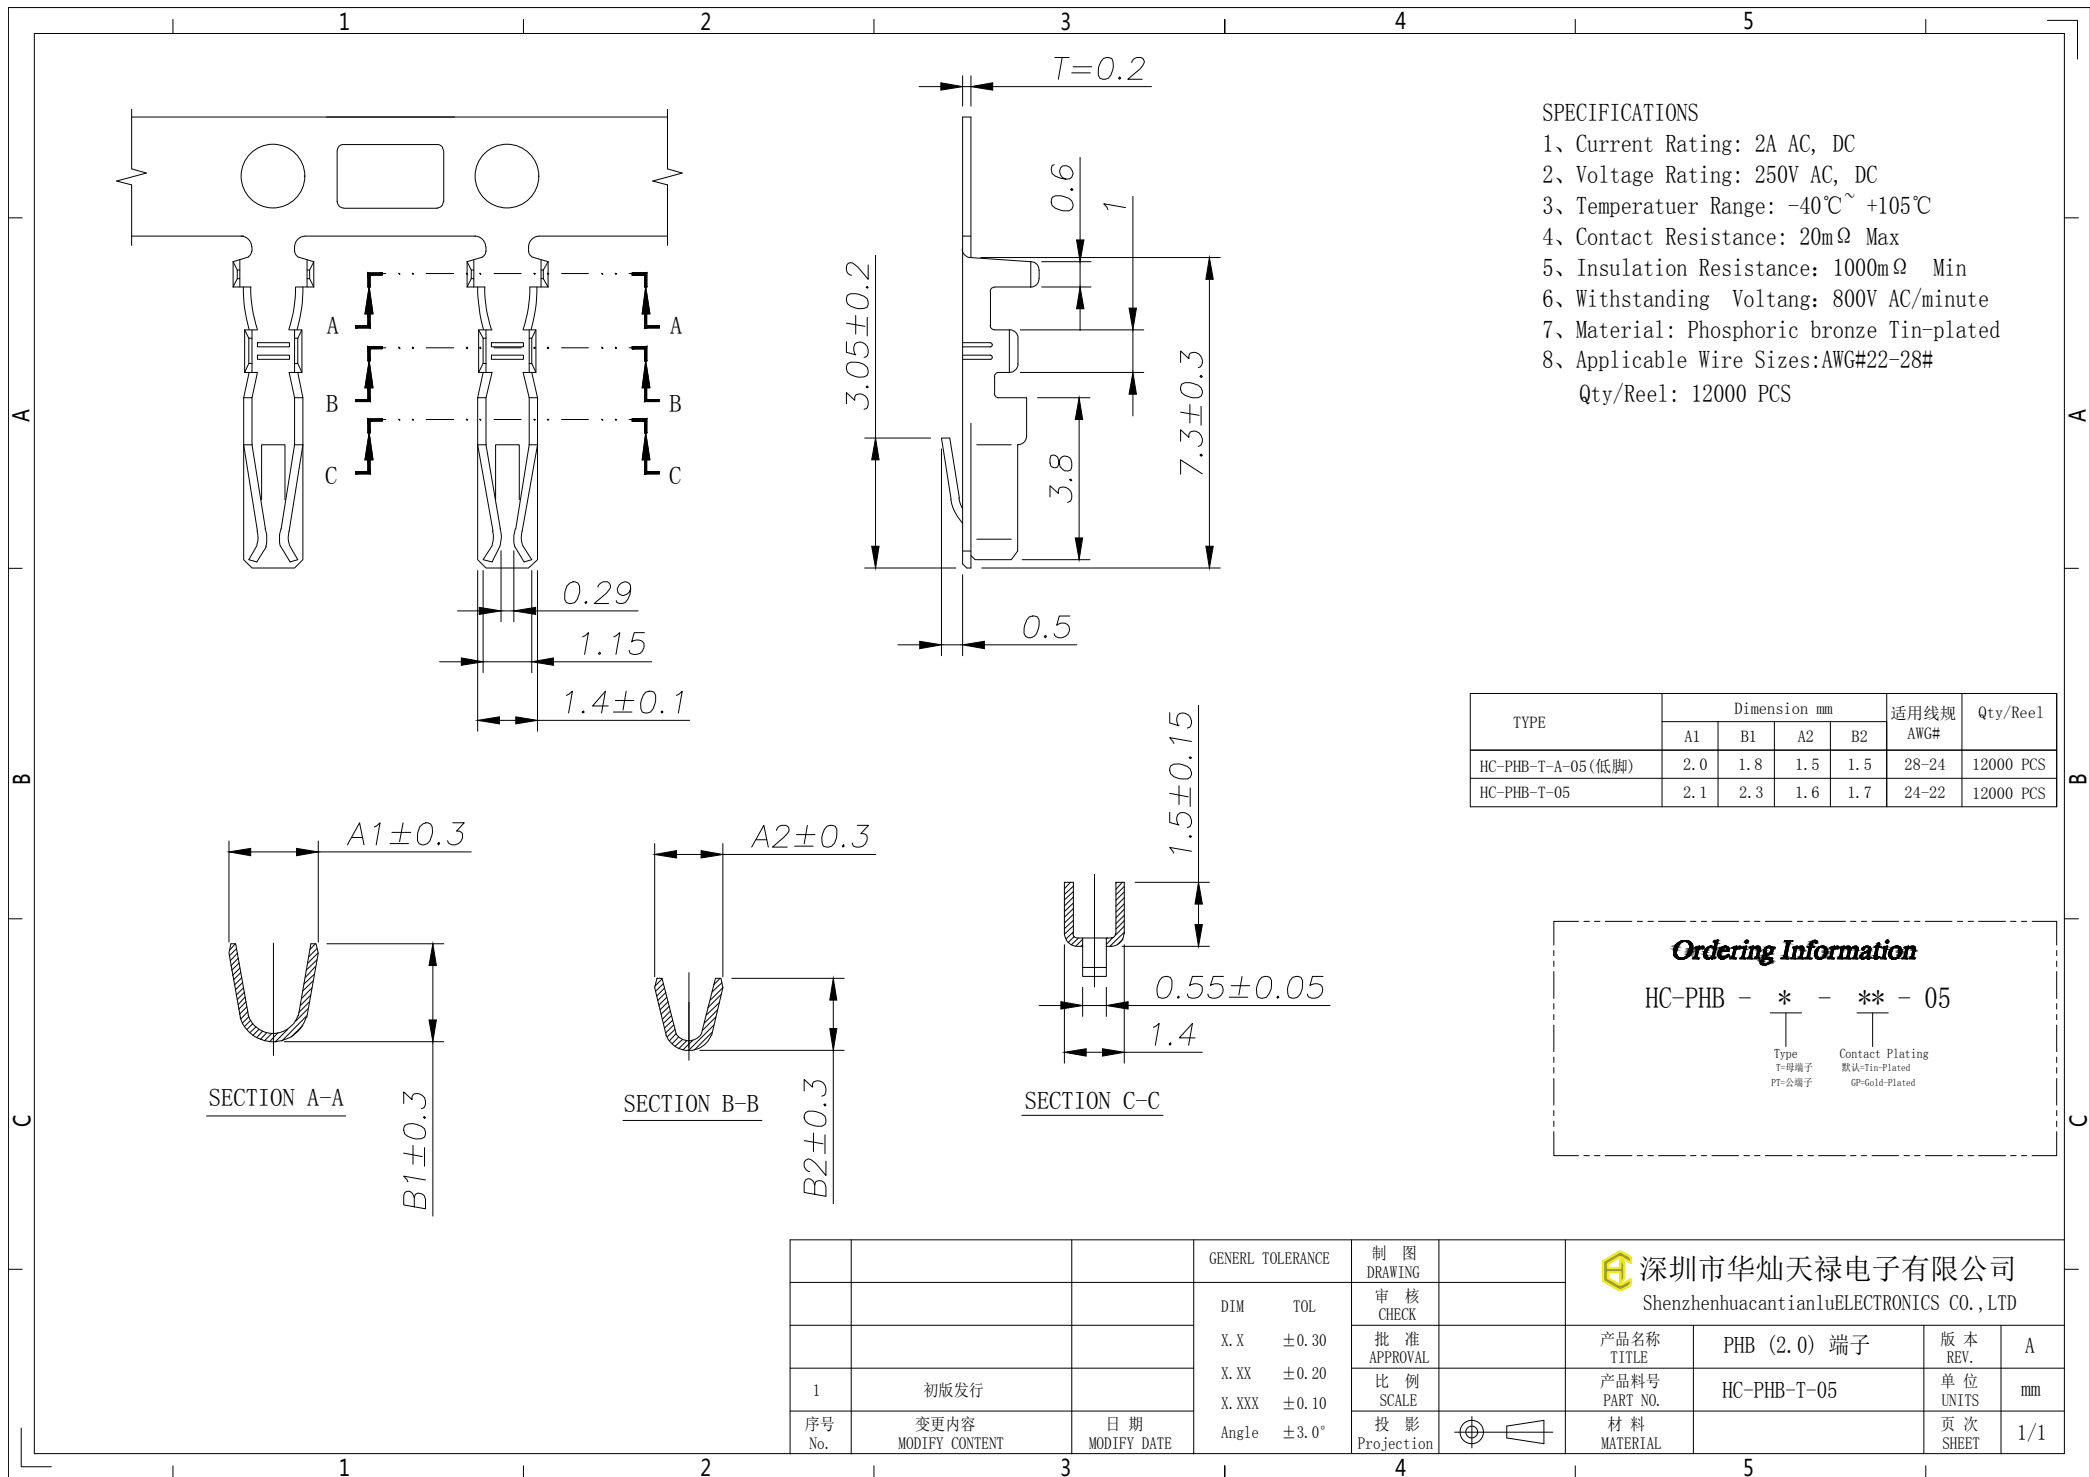

- SPECIFICATIONS
- 1、Current Rating: 2A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperatuer Range: -40℃~ +105℃
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000mΩ Min
 - 6、Withstanding Voltang: 800V AC/minute
 - 7、Material: Phosphoric bronze Tin-plated
 - 8、Applicable Wire Sizes:AWG#22-28#
- Qty/Reel: 12000 PCS

TYPE	Dimension mm				适用线规 AWG#	Qty/Reel
	A1	B1	A2	B2		
HC-PHB-T-A-05(低脚)	2.0	1.8	1.5	1.5	28-24	12000 PCS
HC-PHB-T-05	2.1	2.3	1.6	1.7	24-22	12000 PCS

Ordering Information

HC-PHB - * - ** - 05

Type
T=母端子
PT=公端子

Contact Plating
默认=Tin-Plated
GP=Gold-Plated

			GENEERL TOLERANCE	制 图 DRAWING	深圳市华灿天禄电子有限公司 ShenzhenhuacantianluELECTRONICS CO.,LTD			
			DIM TOL	审 核 CHECK				
			X.X ±0.30	批 准 APPROVAL	产品名称 TITLE	PHB (2.0) 端子	版 本 REV.	A
1	初版发行		X.XX ±0.20	比 例 SCALE	产品料号 PART NO.	HC-PHB-T-05	单 位 UNITS	mm
序号 No.	变更内容 MODIFY CONTENT	日 期 MODIFY DATE	Angle ±3.0°	投 影 Projection	材 料 MATERIAL		页 次 SHEET	1/1