





## 3-TERMINAL 0.1A POSITIVE VOLTAGE REGULATORS

### DESCRIPTION


The 78LXX series of fixed voltage monolithic integrated circuit voltage regulators are suitable for applications that required supply up to 100mA.

### FEATURE

- \*Maximum output current of 100mA
- \*Output voltage of 5V,6V,8V,9V,10V,12V,15V and 24V
- \*Thermal overload protection
- \*Short circuit current limiting

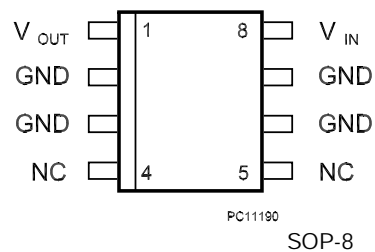

### BLOCK DIAGRAM

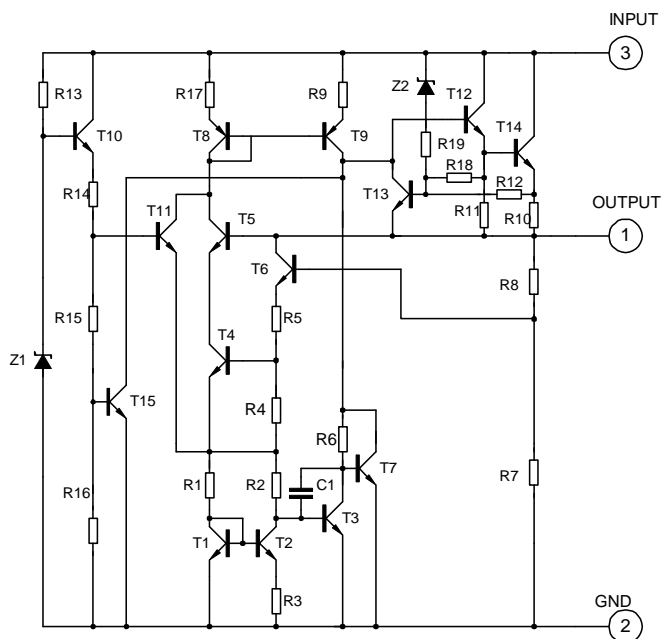

**ABSOLUTE MAXIMUM RATINGS** (Operating temperature range applies unless otherwise specified))

| CHARACTERISTICS                                       | SYMBOL    | VALUE    | UNITS |
|---|-----------|----------|-------|
| Input voltage(for $V_o=5,8V$ )<br>(for $V_o=12,15V$ ) | $V_i$     | 30       | V     |
|   | $V_i$     | 35       | V     |
| High power dissipation                                | $P_d$     | TO-92    | 700   |
|   |           | SOT-23   | 300   |
|   |           | SOT-89   | 400   |
|   |           | SOP-8    | 400   |
| Operating Junction Temperature Range                  | $T_{opr}$ | -20~+120 | °C    |
| Storage Temperature Range                             | $T_{stg}$ | -55~+150 | °C    |

**78L05 ELECTRICAL CHARACTERISTICS**

( $V_i=10V, I_o=40mA, 0 < T_j < 125^\circ C, C_1=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)(Note 1)

| Characteristic                   | Symbol                  | Test conditions                                 | MIN  | TYP  | MAX  | UNIT          |
|----------------------------------|-------------------------|---|------|------|------|---------------|
| Output Voltage                   | $V_o$                   | $T_j=25^\circ C$                                | 4.8  | 5.0  | 5.2  | V             |
|                                  |                         | $7.5V \leq V_i \leq 20V, I_o=1mA \sim 40mA$     | 4.75 |      | 5.25 | V             |
|                                  |                         | $7.5V \leq V_i \leq V_{MAX}, I_o=1mA \sim 70mA$ | 4.75 |      | 5.25 | V<br>(note 2) |
| Output Voltage(note 3)           | $V_o$                   | $T_j=25^\circ C$                                | 4.9  | 5.0  | 5.1  | V             |
|                                  |                         | $7.5V \leq V_i \leq 20V, I_o=1mA \sim 40mA$     | 4.85 |      | 5.15 | V             |
|                                  |                         | $7.5V \leq V_i \leq V_{MAX}, I_o=1mA \sim 70mA$ | 4.85 |      | 5.15 | V<br>(note 2) |
| Load Regulation                  | $\Delta V_o$            | $T_j=25^\circ C, I_o=1mA \sim 100mA$            |      | 11   | 60   | mV            |
|                                  |                         | $T_j=25^\circ C, I_o=1mA \sim 40mA$             |      | 5.0  | 30   | mV            |
| Line regulation                  | $\Delta V_o$            | $7V \leq V_i \leq 20V, T_j=25^\circ C$          |      | 8    | 150  | mV            |
|                                  |                         | $8V \leq V_i \leq 20V, T_j=25^\circ C$          |      | 6    | 100  | mV            |
| Quiescent Current                | $I_q$                   |   |      | 2.0  | 5.5  | mA            |
| Quiescent Current Change         | $\Delta I_q$            | $8V \leq V_i \leq 20V$                          |      |      | 1.5  | mA            |
|                                  | $\Delta I_q$            | $1mA \leq V_i \leq 40mA$                        |      |      | 0.1  | mA            |
| Output Noise Voltage             | $V_N$                   | $10Hz \leq f \leq 100kHz$                       |      | 40   |      | $\mu V$       |
| Temperature coefficient of $V_o$ | $\Delta V_o / \Delta T$ | $I_o=5mA$                                       |      | 0.65 |      | $mV/^\circ C$ |
| Ripple Rejection                 | RR                      | $8V \leq V_i \leq 20V, f=120Hz, T_j=25^\circ C$ | 40   | 49   |      | dB            |
| Dropout Voltage                  | $V_d$                   | $T_j=25^\circ C$                                |      | 1.7  |      | V             |

### 78L06 ELECTRICAL CHARACTERISTICS

( $V_I=12V, I_o=40mA, 0<T_j<125^{\circ}C, C_1=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)(Note 1)

| Characteristic                | Symbol          | Test conditions   | MIN  | TYP  | MAX  | UNIT          |
|-------------------------------|-----------------|---|------|------|------|---------------|
| Output Voltage                | Vo              | T <sub>j</sub> =25°C  | 5.75 | 6.0  | 6.25 | V             |
|                               |                 | 8.5V≤V <sub>I</sub> ≤20V, I <sub>o</sub> =1mA~40mA                  | 5.7  |      | 6.3  | V             |
|                               |                 | 8.5V≤V <sub>I</sub> ≤V <sub>MAX</sub> ,<br>I <sub>o</sub> =1mA~70mA | 5.7  |      | 6.3  | V<br>(note 2) |
| Output Voltage(note 3)        | Vo              | T <sub>j</sub> =25°C  | 5.88 | 6.0  | 6.12 | V             |
|                               |                 | 8.5V≤V <sub>I</sub> ≤20V, I <sub>o</sub> =1mA~40mA                  | 5.82 |      | 6.18 | V             |
|                               |                 | 8.5V≤V <sub>I</sub> ≤V <sub>MAX</sub> ,<br>I <sub>o</sub> =1mA~70mA | 5.82 |      | 6.18 | V<br>(note 2) |
| Load Regulation               | ΔVo             | T <sub>j</sub> =25°C, I <sub>o</sub> =1mA~100mA                     |      | 12.8 | 80   | mV            |
|                               |                 | T <sub>j</sub> =25°C, I <sub>o</sub> =1mA~70mA                      |      | 5.8  | 40   | mV            |
| Line regulation               | ΔVo             | 8.5V≤V <sub>I</sub> ≤20V, T <sub>j</sub> =25°C                      |      | 64   | 175  | mV            |
|                               |                 | 9V≤V <sub>I</sub> ≤20V, T <sub>j</sub> =25°C                        |      | 54   | 125  | mV            |
| Quiescent Current             | I <sub>q</sub>  |   |      | 2.0  | 5.5  | mA            |
| Quiescent Current Change      | ΔI <sub>q</sub> | 9V≤V <sub>I</sub> ≤20V  |      |      | 1.5  | mA            |
|                               | ΔI <sub>q</sub> | 1mA≤V <sub>I</sub> ≤40mA  |      |      | 0.1  | mA            |
| Output Noise Voltage          | V <sub>N</sub>  | 10Hz≤f≤100kHz   |      | 49   |      | μV            |
| Temperature coefficient of Vo | ΔVo/ΔT          | I <sub>o</sub> =5mA   |      | 0.75 |      | mV/°C         |
| Ripple Rejection              | RR              | 10V≤V <sub>I</sub> ≤20V, f=120Hz,<br>T <sub>j</sub> =25°C           | 38   | 46   |      | dB            |
| Dropout Voltage               | V <sub>d</sub>  | T <sub>j</sub> =25°C  |      | 1.7  |      | V             |

### 78L08 ELECTRICAL CHARACTERISTICS

( $V_I=14V, I_o=40mA, 0<T_j<125^{\circ}C, C_1=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)(Note 1)

| Characteristic                | Symbol          | Test conditions  | MIN  | TYP  | MAX  | UNIT          |
|-------------------------------|-----------------|--|------|------|------|---------------|
| Output Voltage                | Vo              | T <sub>j</sub> =25°C   | 7.7  | 8.0  | 8.3  | V             |
|                               |                 | 10.5V≤V <sub>I</sub> ≤23V, I <sub>o</sub> =1mA~40mA                  | 7.6  |      | 8.4  | V             |
|                               |                 | 10.5V≤V <sub>I</sub> ≤V <sub>MAX</sub> ,<br>I <sub>o</sub> =1mA~70mA | 7.6  |      | 8.4  | V<br>(note 2) |
| Output Voltage(note 3)        | Vo              | T <sub>j</sub> =25°C   | 7.84 | 8.0  | 8.16 | V             |
|                               |                 | 10.5V≤V <sub>I</sub> ≤23V, I <sub>o</sub> =1mA~40mA                  | 7.76 |      | 8.24 | V             |
|                               |                 | 10.5V≤V <sub>I</sub> ≤V <sub>MAX</sub> ,<br>I <sub>o</sub> =1mA~70mA | 7.76 |      | 8.24 | V<br>(note 2) |
| Load Regulation               | ΔVo             | T <sub>j</sub> =25°C, I <sub>o</sub> =1mA~100mA                      |      | 15   | 80   | mV            |
|                               |                 | T <sub>j</sub> =25°C, I <sub>o</sub> =1mA~70mA                       |      | 8.0  | 40   | mV            |
| Line regulation               | ΔVo             | 10.5V≤V <sub>I</sub> ≤23V, T <sub>j</sub> =25°C                      |      | 10   | 175  | mV            |
|                               |                 | 11V≤V <sub>I</sub> ≤23V, T <sub>j</sub> =25°C                        |      | 8    | 125  | mV            |
| Quiescent Current             | I <sub>q</sub>  |  |      | 2.0  | 5.5  | mA            |
| Quiescent Current Change      | ΔI <sub>q</sub> | 11V≤V <sub>I</sub> ≤23V  |      |      | 1.5  | mA            |
|                               | ΔI <sub>q</sub> | 1mA≤V <sub>I</sub> ≤40mA   |      |      | 0.1  | mA            |
| Output Noise Voltage          | V <sub>N</sub>  | 10Hz≤f≤100kHz  |      | 49   |      | μV            |
| Temperature coefficient of Vo | ΔVo/ΔT          | I <sub>o</sub> =5mA  |      | 0.75 |      | mV/°C         |
| Ripple Rejection              | RR              | 11V≤V <sub>I</sub> ≤23V, f=120Hz,<br>T <sub>j</sub> =25°C            | 36   | 45   |      | dB            |
| Dropout Voltage               | V <sub>d</sub>  | T <sub>j</sub> =25°C   |      | 1.7  |      | V             |

### 78L09 ELECTRICAL CHARACTERISTICS

(VI=15V, Io=40mA, 0<Tj<125°C, C1=0.33μF, Co=0.1μF, unless otherwise specified)(Note 1)

| Characteristic                | Symbol | Test conditions              | MIN  | TYP  | MAX  | UNIT          |
|-------------------------------|--------|------------------------------|------|------|------|---------------|
| Output Voltage                | Vo     | Tj=25°C                      | 8.64 | 9.0  | 9.36 | V             |
|                               |        | 11.5V≤Vi≤24V, Io=1mA~40mA    | 8.55 |      | 9.45 | V             |
|                               |        | 11.5V≤Vi≤VMAX, Io=1mA~70mA   | 8.55 |      | 9.45 | V<br>(note 2) |
| Output Voltage(note 3)        | Vo     | Tj=25°C                      | 8.82 | 9.0  | 9.18 | V             |
|                               |        | 11.5V≤Vi≤24V, Io=1mA~40mA    | 8.73 |      | 9.27 | V             |
|                               |        | 11.5V≤Vi≤VMAX, Io=1mA~70mA   | 8.73 |      | 9.27 | V<br>(note 2) |
| Load Regulation               | ΔVo    | Tj=25°C, Io=1mA~100mA        |      | 20   | 90   | mV            |
|                               |        | Tj=25°C, Io=1mA~40mA         |      | 10   | 45   | mV            |
| Line regulation               | ΔVo    | 11.5V≤Vi≤24V, Tj=25°C        |      | 90   | 200  | mV            |
|                               |        | 13V≤Vi≤24V, Tj=25°C          |      | 100  | 150  | mV            |
| Quiescent Current             | Iq     |                              |      | 2.0  | 5.5  | mA            |
| Quiescent Current Change      | ΔIq    | 13V≤Vi≤24V                   |      |      | 1.5  | mA            |
|                               | ΔIq    | 1mA≤Vi≤40mA                  |      |      | 0.1  | mA            |
| Output Noise Voltage          | VN     | 10Hz≤f≤100kHz                |      | 49   |      | μV            |
| Temperature coefficient of Vo | ΔVo/ΔT | Io=5mA                       |      | 0.75 |      | mV/°C         |
| Ripple Rejection              | RR     | 12V≤Vi≤23V, f=120Hz, Tj=25°C | 36   | 44   |      | dB            |
| Dropout Voltage               | Vd     | Tj=25°C                      |      | 1.7  |      | V             |

### 78L10 ELECTRICAL CHARACTERISTICS

(VI=15V, Io=40mA, 0<Tj<125°C, C1=0.33μF, Co=0.1μF, unless otherwise specified)(Note 1)

| Characteristic                | Symbol | Test conditions              | MIN  | TYP  | MAX   | UNIT          |
|-------------------------------|--------|------------------------------|------|------|-------|---------------|
| Output Voltage                | Vo     | Tj=25°C                      | 9.61 | 10   | 10.4  | V             |
|                               |        | 12.5V≤Vi≤24V, Io=1mA~40mA    | 9.55 |      | 10.45 | V             |
|                               |        | 12.5V≤Vi≤VMAX, Io=1mA~70mA   | 9.55 |      | 10.45 | V<br>(note 2) |
| Output Voltage(note 3)        | Vo     | Tj=25°C                      | 9.8  | 10   | 10.2  | V             |
|                               |        | 12.5V≤Vi≤24V, Io=1mA~40mA    | 9.7  |      | 10.3  | V             |
|                               |        | 12.5V≤Vi≤VMAX, Io=1mA~70mA   | 9.7  |      | 10.3  | V<br>(note 2) |
| Load Regulation               | ΔVo    | Tj=25°C, Io=1mA~100mA        |      | 20   | 90    | mV            |
|                               |        | Tj=25°C, Io=1mA~40mA         |      | 10   | 45    | mV            |
| Line regulation               | ΔVo    | ≤Vi≤24V, Tj=25°C             |      | 90   | 200   | mV            |
|                               |        | 13V≤Vi≤24V, Tj=25°C          |      | 100  | 150   | mV            |
| Quiescent Current             | Iq     |                              |      | 2.0  | 5.5   | mA            |
| Quiescent Current Change      | ΔIq    | 13V≤Vi≤24V                   |      |      | 1.5   | mA            |
|                               | ΔIq    | 1mA≤Vi≤40mA                  |      |      | 0.1   | mA            |
| Output Noise Voltage          | VN     | 10Hz≤f≤100kHz                |      | 49   |       | μV            |
| Temperature coefficient of Vo | ΔVo/ΔT | Io=5mA                       |      | 0.75 |       | mV/°C         |
| Ripple Rejection              | RR     | 12V≤Vi≤23V, f=120Hz, Tj=25°C | 36   | 44   |       | dB            |
| Dropout Voltage               | Vd     | Tj=25°C                      |      | 1.7  |       | V             |

### 78L12 ELECTRICAL CHARACTERISTICS

(VI=19V, Io=40mA, 0<Tj<125°C, C1=0.33μF, Co=0.1μF, unless otherwise specified)(Note 1)

| Characteristic                | Symbol | Test conditions              | MIN   | TYP  | MAX   | UNIT          |
|-------------------------------|--------|------------------------------|-------|------|-------|---------------|
| Output Voltage                | Vo     | Tj=25°C                      | 11.5  | 12   | 12.6  | V             |
|                               |        | 14.5V≤Vi≤27V, Io=1mA~40mA    | 11.4  |      | 12.6  | V             |
|                               |        | 14.5V≤Vi≤VMAX, Io=1mA~70mA   | 11.4  |      | 12.6  | V<br>(note 2) |
| Output Voltage(note 3)        | Vo     | Tj=25°C                      | 11.76 | 12.0 | 12.24 | V             |
|                               |        | 14.5V≤Vi≤27V, Io=1mA~40mA    | 11.64 |      | 12.36 | V             |
|                               |        | 14.5V≤Vi≤VMAX, Io=1mA~70mA   | 11.64 |      | 12.36 | V<br>(note 2) |
| Load Regulation               | ΔVo    | Tj=25°C, Io=1mA~100mA        |       | 25   | 150   | mV            |
|                               |        | Tj=25°C, Io=1mA~40mA         |       | 12   | 75    | mV            |
| Line regulation               | ΔVo    | 14.5V≤Vi≤27V, Tj=25°C        |       | 25   | 300   | mV            |
|                               |        | 16V≤Vi≤27V, Tj=25°C          |       | 20   | 250   | mV            |
| Quiescent Current             | Iq     |                              |       | 2.0  | 5.5   | mA            |
| Quiescent Current Change      | ΔIq    | 16V≤Vi≤27V                   |       |      | 1.5   | mA            |
|                               | ΔIq    | 1mA≤Vi≤40mA                  |       |      | 0.1   | mA            |
| Output Noise Voltage          | VN     | 10Hz≤f≤100kHz                |       | 80   |       | μV            |
| Temperature coefficient of Vo | ΔVo/ΔT | Io=5mA                       |       | 1.0  |       | mV/°C         |
| Ripple Rejection              | RR     | 15V≤Vi≤25V, f=120Hz, Tj=25°C | 36    | 42   |       | dB            |
| Dropout Voltage               | Vd     | Tj=25°C                      |       | 1.7  |       | V             |

### 78L15 ELECTRICAL CHARACTERISTICS

(VI=23V, Io=40mA, 0<Tj<125°C, C1=0.33μF, Co=0.1μF, unless otherwise specified)(Note 1)

| Characteristic                | Symbol | Test conditions                  | MIN   | TYP  | MAX   | UNIT          |
|-------------------------------|--------|----------------------------------|-------|------|-------|---------------|
| Output Voltage                | Vo     | Tj=25°C                          | 14.4  | 15   | 15.6  | V             |
|                               |        | 17.5V≤Vi≤30V, Io=1mA~40mA        | 14.25 |      | 15.75 | V             |
|                               |        | 17.5V≤Vi≤VMAX, Io=1mA~70mA       | 14.25 |      | 15.75 | V<br>(note 2) |
| Output Voltage(note 3)        | Vo     | Tj=25°C                          | 14.7  | 15.0 | 15.3  | V             |
|                               |        | 17.5V≤Vi≤30V, Io=1mA~40mA        | 14.55 |      | 15.45 | V             |
|                               |        | 17.5V≤Vi≤VMAX, Io=1mA~70mA       | 14.55 |      | 15.45 | V<br>(note 2) |
| Load Regulation               | ΔVo    | Tj=25°C, Io=1mA~100mA            |       | 20   | 150   | mV            |
|                               |        | Tj=25°C, Io=1mA~70mA             |       | 25   | 150   | mV            |
| Line regulation               | ΔVo    | 17.5V≤Vi≤30V, Tj=25°C            |       | 25   | 150   | mV            |
|                               |        | 20V≤Vi≤30V, Tj=25°C              |       | 15   | 75    | mV            |
| Quiescent Current             | Iq     |                                  |       | 2.2  | 6.0   | mA            |
| Quiescent Current Change      | ΔIq    | 20V≤Vi≤30V                       |       |      | 1.5   | mA            |
|                               | ΔIq    | 1mA≤Vi≤40mA                      |       |      | 0.1   | mA            |
| Output Noise Voltage          | VN     | 10Hz≤f≤100kHz                    |       | 90   |       | μV            |
| Temperature coefficient of Vo | ΔVo/ΔT | Io=5mA                           |       | 1.3  |       | mV/°C         |
| Ripple Rejection              | RR     | 18.5V≤Vi≤28.5V, f=120Hz, Tj=25°C | 33    | 39   |       | dB            |
| Dropout Voltage               | Vd     | Tj=25°C                          |       | 1.7  |       | V             |

### 78L18 ELECTRICAL CHARACTERISTICS

( $V_I=27V, I_o=40mA, 0<T_j<125^{\circ}C, C_1=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)(Note 1)

| Characteristic                   | Symbol                | Test conditions                                   | MIN   | TYP  | MAX   | UNIT           |
|----------------------------------|-----------------------|---|-------|------|-------|----------------|
| Output Voltage                   | $V_o$                 | $T_j=25^{\circ}C$                                 | 17.3  | 18   | 18.7  | V              |
|                                  |                       | $21V \leq V_I \leq 33V, I_o=1mA \sim 40mA$        | 17.1  |      | 18.9  | V              |
|                                  |                       | $21V \leq V_I \leq V_{MAX}, I_o=1mA \sim 70mA$    | 17.1  |      | 18.9  | V<br>(note 2)  |
| Output Voltage(note 3)           | $V_o$                 | $T_j=25^{\circ}C$                                 | 17.64 | 18.0 | 18.36 | V              |
|                                  |                       | $21V \leq V_I \leq 33V, I_o=1mA \sim 40mA$        | 17.46 |      | 18.54 | V              |
|                                  |                       | $21V \leq V_I \leq V_{MAX}, I_o=1mA \sim 70mA$    | 17.46 |      | 18.54 | V<br>(note 2)  |
| Load Regulation                  | $\Delta V_o$          | $T_j=25^{\circ}C, I_o=1mA \sim 100mA$             |       | 30   | 170   | mV             |
|                                  |                       | $T_j=25^{\circ}C, I_o=1mA \sim 40mA$              |       | 15   | 85    | mV             |
| Line regulation                  | $\Delta V_o$          | $21V \leq V_I \leq 33V, T_j=25^{\circ}C$          |       | 145  | 300   | mV             |
|                                  |                       | $22V \leq V_I \leq 33V, T_j=25^{\circ}C$          |       | 135  | 250   | mV             |
| Quiescent Current                | $I_q$                 |   |       | 2.2  | 6.0   | mA             |
| Quiescent Current Change         | $\Delta I_q$          | $21V \leq V_I \leq 33V$                           |       |      | 1.5   | mA             |
|                                  | $\Delta I_q$          | $1mA \leq V_I \leq 40mA$                          |       |      | 0.1   | mA             |
| Output Noise Voltage             | $V_N$                 | $10Hz \leq f \leq 100kHz$                         |       | 150  |       | $\mu V$        |
| Temperature coefficient of $V_o$ | $\Delta V_o/\Delta T$ | $I_o=5mA$   |       | 1.8  |       | $mV/^{\circ}C$ |
| Ripple Rejection                 | RR                    | $23V \leq V_I \leq 33V, f=120Hz, T_j=25^{\circ}C$ | 32    | 38   |       | dB             |
| Dropout Voltage                  | $V_d$                 | $T_j=250^{\circ}C$                                |       | 1.7  |       | V              |

### 78L24 ELECTRICAL CHARACTERISTICS

( $V_I=33V, I_o=40mA, 0<T_j<125^{\circ}C, C_1=0.33\mu F, C_o=0.1\mu F$ , unless otherwise specified)(Note 1)


| Characteristic                   | Symbol                | Test conditions                                   | MIN   | TYP | MAX   | UNIT           |
|----------------------------------|-----------------------|---|-------|-----|-------|----------------|
| Output Voltage                   | $V_o$                 | $T_j=25^{\circ}C$                                 | 23    | 24  | 25    | V              |
|                                  |                       | $27V \leq V_I \leq 38V, I_o=1mA \sim 40mA$        | 22.8  |     | 25.2  | V              |
|                                  |                       | $27V \leq V_I \leq V_{MAX}, I_o=1mA \sim 70mA$    | 22.8  |     | 25.2  | V<br>(note 2)  |
| Output Voltage(note 3)           | $V_o$                 | $T_j=25^{\circ}C$                                 | 23.5  | 24  | 24.5  | V              |
|                                  |                       | $27V \leq V_I \leq 38V, I_o=1mA \sim 40mA$        | 23.25 |     | 24.75 | V              |
|                                  |                       | $27V \leq V_I \leq V_{MAX}, I_o=1mA \sim 70mA$    | 23.25 |     | 24.75 | V<br>(note 2)  |
| Load Regulation                  | $\Delta V_o$          | $T_j=25^{\circ}C, I_o=1mA \sim 100mA$             |       | 40  | 200   | mV             |
|                                  |                       | $T_j=25^{\circ}C, I_o=1mA \sim 40mA$              |       | 20  | 100   | mV             |
| Line regulation                  | $\Delta V_o$          | $27V \leq V_I \leq 38V, T_j=25^{\circ}C$          |       | 160 | 300   | mV             |
|                                  |                       | $28V \leq V_I \leq 38V, T_j=25^{\circ}C$          |       | 150 | 250   | mV             |
| Quiescent Current                | $I_q$                 |   |       | 2.2 | 6.0   | mA             |
| Quiescent Current Change         | $\Delta I_q$          | $27V \leq V_I \leq 38V$                           |       |     | 1.5   | mA             |
|                                  | $\Delta I_q$          | $1mA \leq V_I \leq 40mA$                          |       |     | 0.1   | mA             |
| Output Noise Voltage             | $V_N$                 | $10Hz \leq f \leq 100kHz$                         |       | 200 |       | $\mu V$        |
| Temperature coefficient of $V_o$ | $\Delta V_o/\Delta T$ | $I_o=5mA$   |       | 2.0 |       | $mV/^{\circ}C$ |
| Ripple Rejection                 | RR                    | $27V \leq V_I \leq 38V, f=120Hz, T_j=25^{\circ}C$ | 30    | 37  |       | dB             |
| Dropout Voltage                  | $V_d$                 | $T_j=25^{\circ}C$                                 |       | 1.7 |       | V              |

Note 1: The Maximum steady state usable output current and input voltage are very dependent on the heating sinking and/or lead temperature length of the package. The date above represent pulse test conditions with junction temperatures as indicated at the initiation of test.

Note 2: Power dissipation < 0.75W.







Note 3: Output voltage of 78LXXA.

## TYPICAL APPLICATION

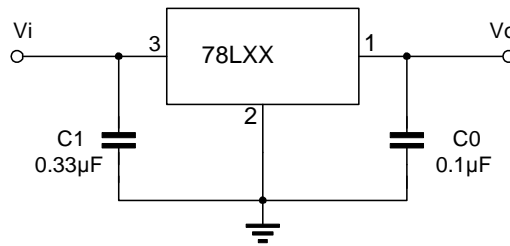


Note 1: To specify an output voltage, substitute voltage value for "XX".

Note 2: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

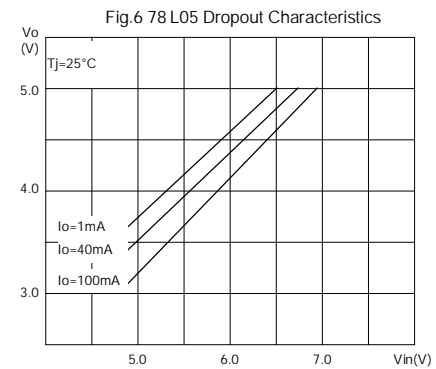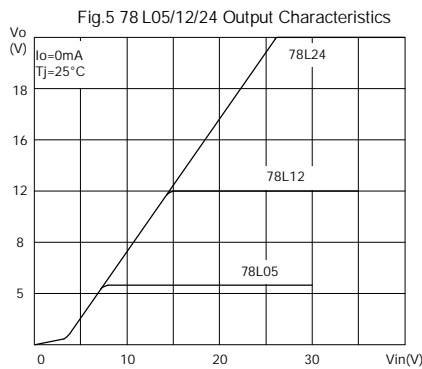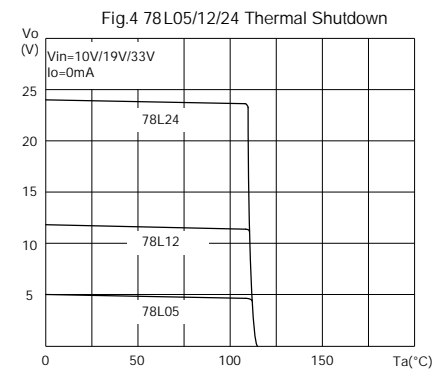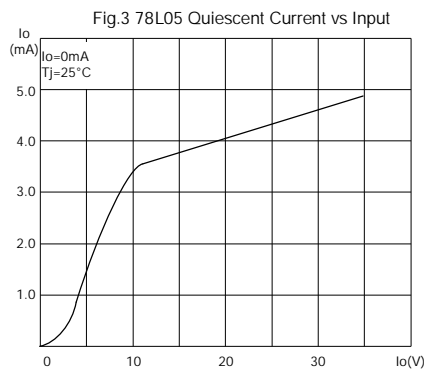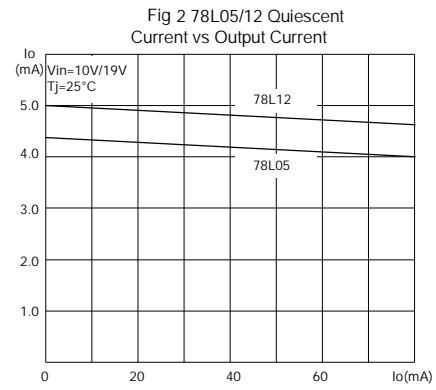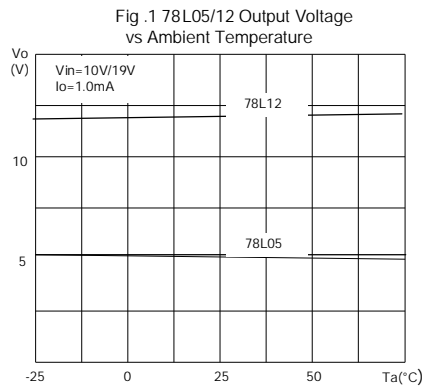

PACKAGE OUTLINE


SOT-89

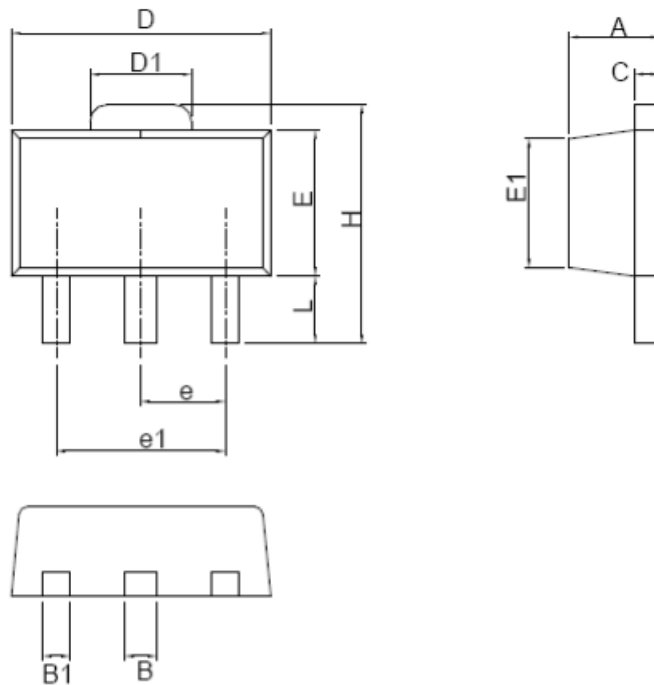

| SYMBOL | SOT-89      |      |           |       |
|--------|-------------|------|-----------|-------|
|        | MILLIMETERS |      | INCHES    |       |
|        | MIN.        | MAX. | MIN.      | MAX.  |
| A      | 1.40        | 1.60 | 0.055     | 0.063 |
| B      | 0.44        | 0.56 | 0.017     | 0.022 |
| B1     | 0.36        | 0.48 | 0.014     | 0.019 |
| C      | 0.35        | 0.44 | 0.014     | 0.017 |
| D      | 4.40        | 4.60 | 0.173     | 0.181 |
| D1     | 1.62        | 1.83 | 0.064     | 0.072 |
| E      | 2.29        | 2.60 | 0.090     | 0.102 |
| E1     | 2.13        | 2.29 | 0.084     | 0.090 |
| e      | 1.50 BSC    |      | 0.059 BSC |       |
| e1     | 3.00 BSC    |      | 0.118 BSC |       |
| H      | 3.94        | 4.25 | 0.155     | 0.167 |
| L      | 0.89        | 1.20 | 0.035     | 0.047 |




TO-92

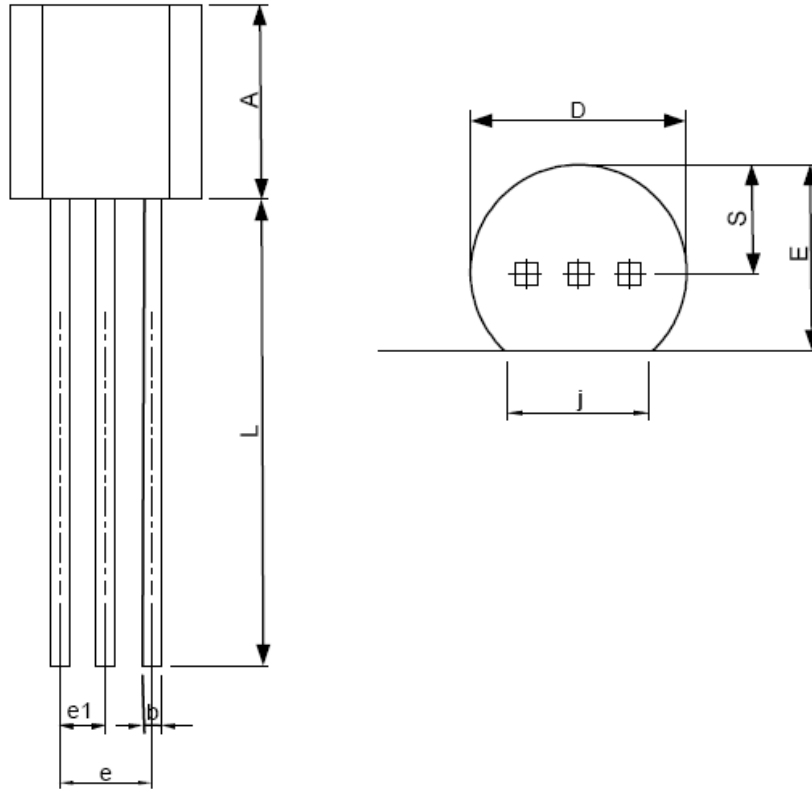

| SYMBOL | TO-92       |       |        |       |
|--------|-------------|-------|--------|-------|
|        | MILLIMETERS |       | INCHES |       |
|        | MIN.        | MAX.  | MIN.   | MAX.  |
| A      | 4.32        | 5.33  | 0.170  | 0.210 |
| b      | 0.41        | 0.53  | 0.016  | 0.021 |
| D      | 4.45        | 5.20  | 0.175  | 0.205 |
| E      | 3.18        | 4.19  | 0.125  | 0.165 |
| e      | 2.42        | 2.66  | 0.095  | 0.105 |
| e1     | 1.15        | 1.39  | 0.045  | 0.055 |
| j      | 3.43        | 4.00  | 0.135  | 0.157 |
| L      | 12.70       | 15.00 | 0.500  | 0.591 |
| S      | 2.03        | 2.66  | 0.080  | 0.105 |


Note : Follow JEDEC TO-92.

SOP-8

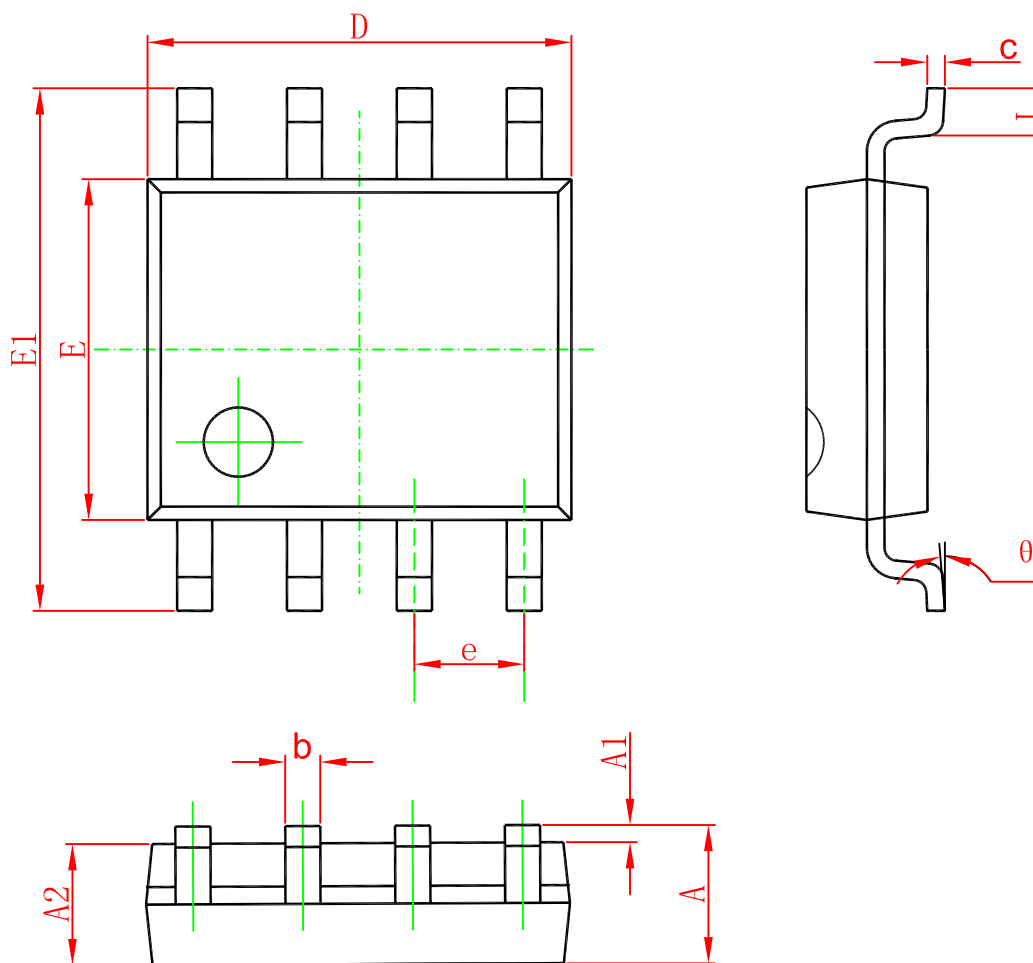

| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min                       | Max   | Min                  | Max   |
| A        | 1.350                     | 1.750 | 0.053                | 0.069 |
| A1       | 0.100                     | 0.250 | 0.004                | 0.010 |
| A2       | 1.350                     | 1.550 | 0.053                | 0.061 |
| b        | 0.330                     | 0.510 | 0.013                | 0.020 |
| c        | 0.170                     | 0.250 | 0.006                | 0.010 |
| D        | 4.700                     | 5.100 | 0.185                | 0.200 |
| E        | 3.800                     | 4.000 | 0.150                | 0.157 |
| E1       | 5.800                     | 6.200 | 0.228                | 0.244 |
| e        | 1.270(BSC)                |       | 0.050(BSC)           |       |
| L        | 0.400                     | 1.270 | 0.016                | 0.050 |
| $\theta$ | 0°                        | 8°    | 0°                   | 8°    |

SOT-23

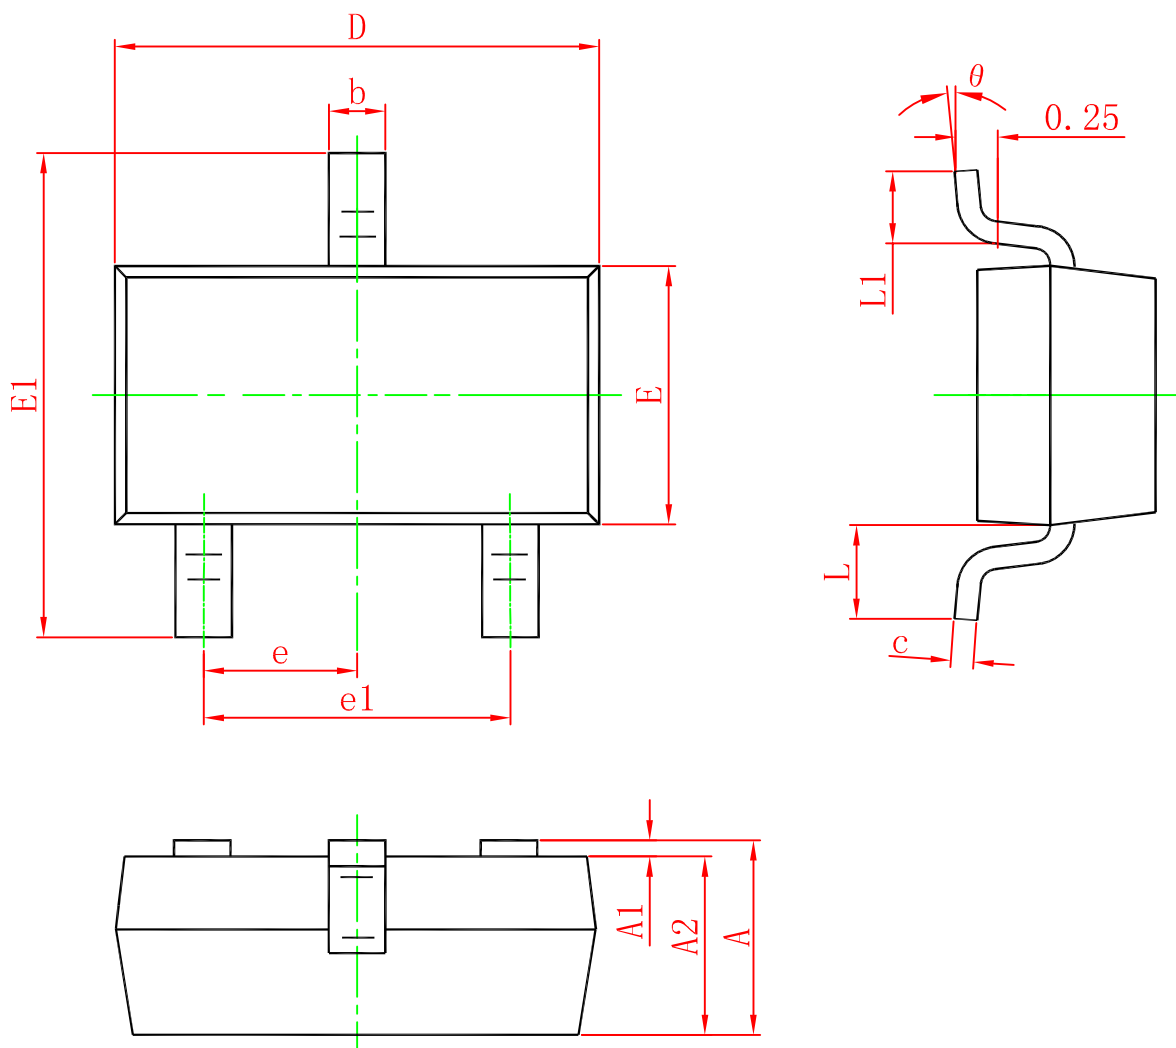

| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min.                      | Max.  | Min.                 | Max.  |
| A        | 0.900                     | 1.150 | 0.035                | 0.045 |
| A1       | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2       | 0.900                     | 1.050 | 0.035                | 0.041 |
| b        | 0.300                     | 0.500 | 0.012                | 0.020 |
| c        | 0.080                     | 0.150 | 0.003                | 0.006 |
| D        | 2.800                     | 3.000 | 0.110                | 0.118 |
| E        | 1.200                     | 1.400 | 0.047                | 0.055 |
| E1       | 2.250                     | 2.550 | 0.089                | 0.100 |
| e        | 0.950 TYP.                |       | 0.037 TYP.           |       |
| e1       | 1.800                     | 2.000 | 0.071                | 0.079 |
| L        | 0.550 REF.                |       | 0.022 REF.           |       |
| L1       | 0.300                     | 0.500 | 0.012                | 0.020 |
| $\theta$ | 0°                        | 8°    | 0°                   | 8°    |

**ORDERING INFORMATION**

| Order code  | Package | Baseqty | Deliverymode  | Marking |
|-------------|---------|---------|---------------|---------|
| UMW L78LxxA | SOP-8   | 2500    | Tape and reel | L78LxxA |
| UMW 78LxxS  | SOT-23  | 3000    | Tape and reel | Lxx.    |
| UMW 78LxxL  | TO-92   | 1000    | Bulk Bag      | 78LxxL  |
| UMW 78Lxx   | SOT-89  | 1000    | Tape and reel | 78Lxx   |