



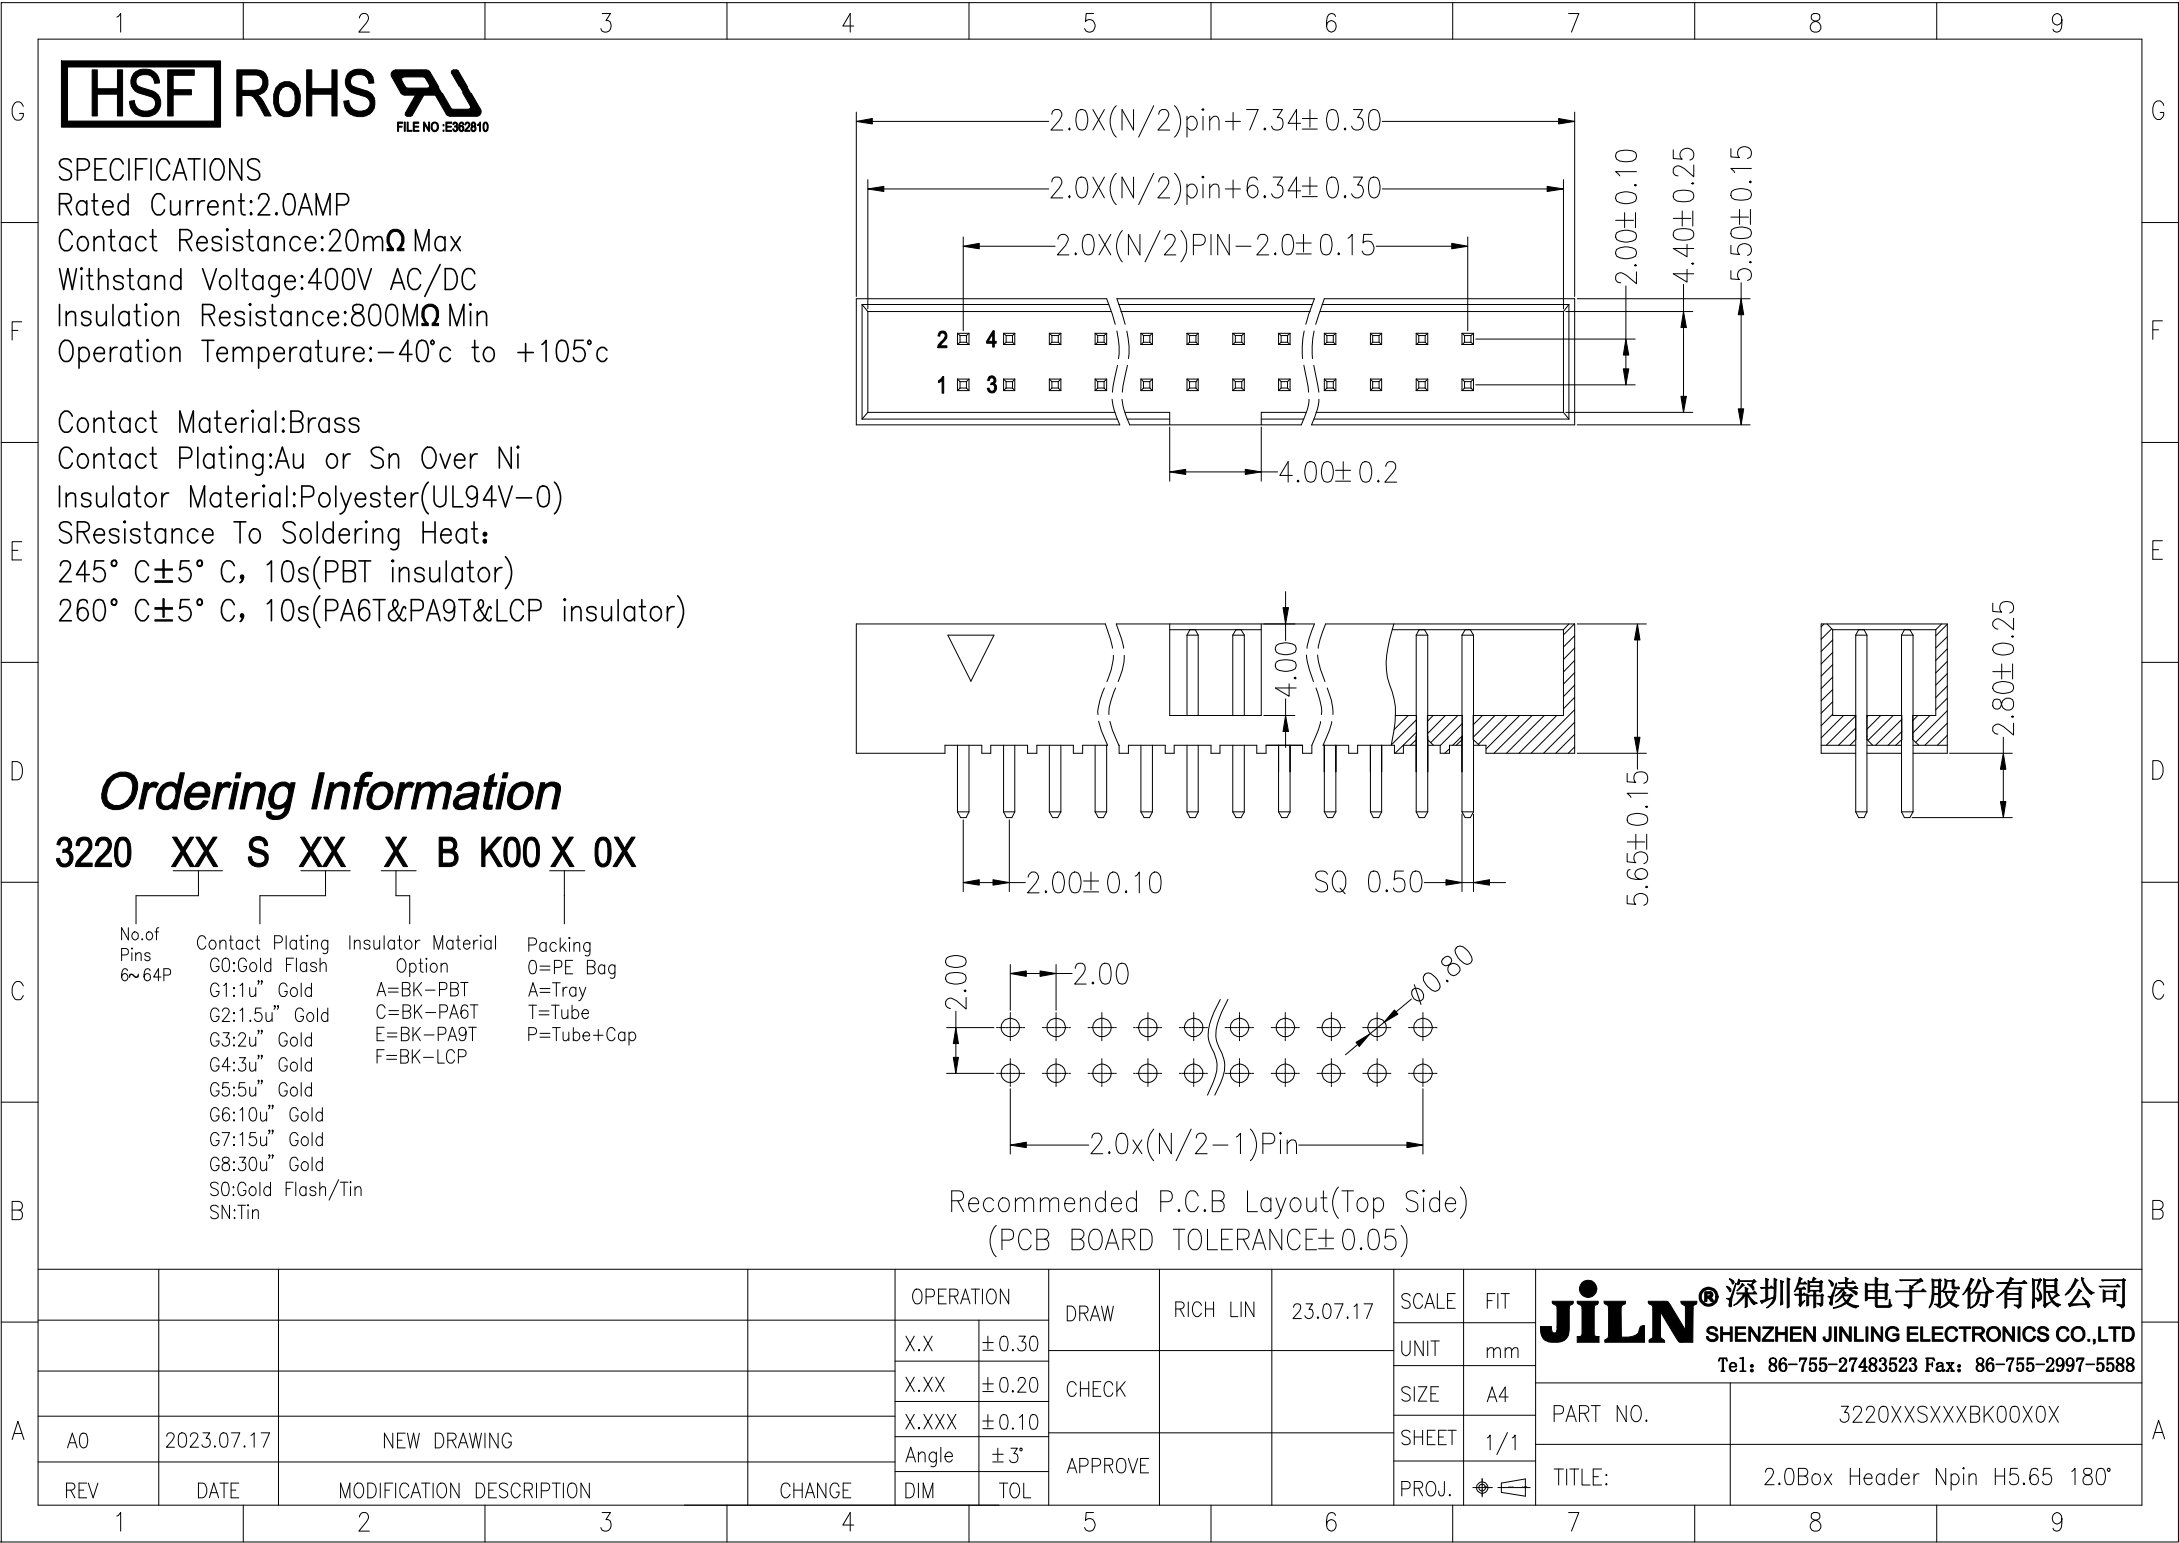

260° C $\pm$ 5° C, 10s(PA6T&PA9T&LCP insulator)

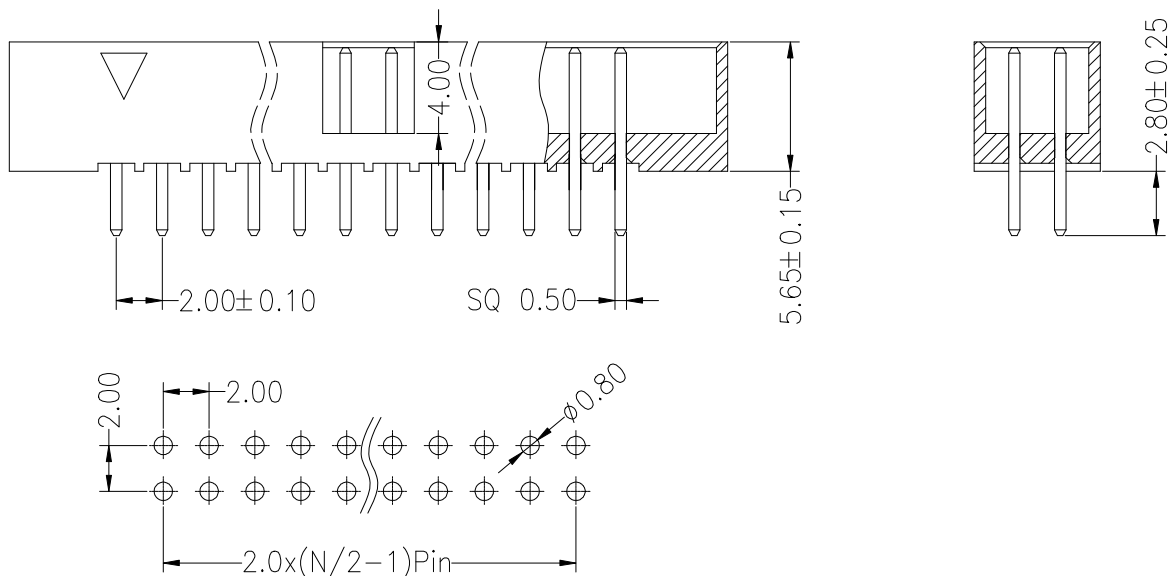

3220 XX S XX X B K00 X 0X

Packing
O=PE Bag
A=Tray
T=Tube
P=Tube+Cap

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

				OPERATION		DRAW	RICH LIN	23.07.17	SCALE	FIT	JILN® 深圳锦凌电子股份有限公司 SHENZHEN JINLING ELECTRONICS CO.,LTD Tel: 86-755-27483523 Fax: 86-755-2997-5588	
				X.X	±0.30				CHECK	UNIT		
				X.XX	±0.20	SIZE	A4					
A0	2023.07.17	NEW DRAWING		X.XXX	±0.10	APPROVE			SHEET	1/1	PART NO.	3220XXSXXXBK00X0X
				Angle	± 3°				PROJ.		TITLE:	2.0Box Header Npin H5.65 180°
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL							