

修訂 REV NO	標記 MARK	修改摘要 REVISION DESCRIPTION	簽名 SIGNATURE	日期 DATE
		NEW DWG		2016-03-12

SPECIFICATIONS

Current Rating:

2Amps

Insulator resistance:

5000 Megchms min.

Dielectric Withstanding: AC 500V

AC 500 V

Operating Temperature:

 $-40^{\circ} \sim +105^{\circ} \text{ C}$

Max Processing Temp:

230° for 30~60 seconds

(260° for 10 seconds)

Contact Material:

Brass



Insulator Material:

NYLON-6T

UNSPECIFIED TOLERANCE: ± 0.20

Dimensions List

Contacts		Dimensions		Contacts		Dimensions	
Per row	A	B	Per row	A	B		
1	1.27	0	1*21	26.67	25.40		
1*2	2.54	1.27	1*22	27.94	26.67		
1*3	3.81	2.54	1*23	29.21	27.94		
1*4	5.08	3.81	1*24	30.48	29.21		
1*5	6.35	5.08	1*25	31.75	30.48		
1*6	7.62	6.35	1*26	33.02	31.75		
1*7	8.89	7.62	1*27	34.29	33.02		
1*8	10.16	8.89	1*28	35.56	34.29		
1*9	11.43	10.16	1*29	36.83	35.56		
1*10	12.70	11.43	1*30	38.10	36.83		
1*11	13.97	12.70	1*31	39.37	38.10		
1*12	15.24	13.97	1*32	40.64	39.37		
1*13	16.51	15.24	1*33	41.91	40.64		
1*14	17.78	16.51	1*34	43.18	41.91		
1*15	19.05	17.78	1*35	44.45	43.18		
1*16	20.32	19.05	1*36	45.72	44.45		
1*17	21.59	20.32	1*37	46.99	45.72		
1*18	22.86	21.59	1*38	48.26	46.99		
1*19	24.13	22.86	1*39	49.53	48.26		
1*20	25.40	24.13	1*40	50.80	49.53		

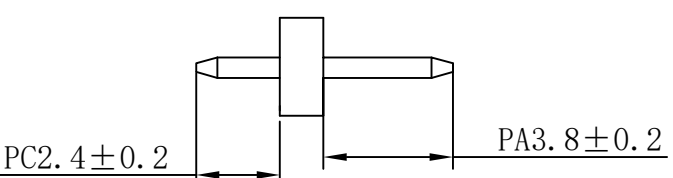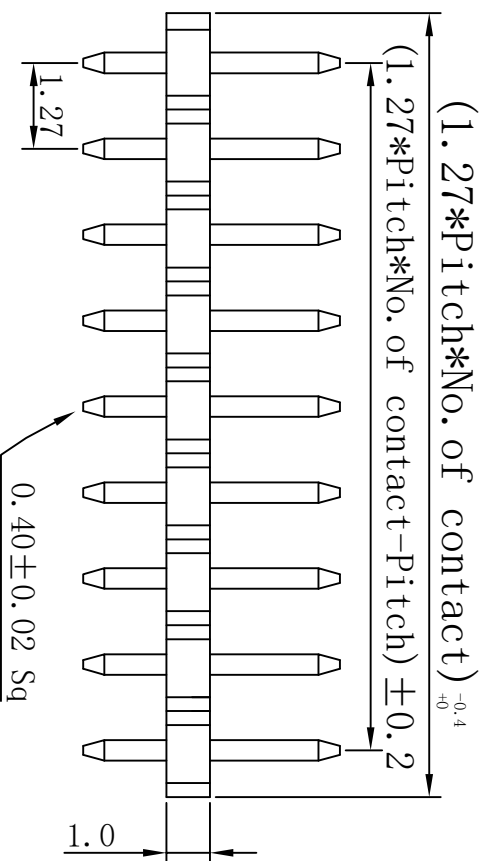

HDC

深圳市华德共创科技有限公司
Shenzhen Huade co-create Technology Co., LTD
电话: 0755-23304126 传真: 0755-29940187

-TOLERANCES- UNLESS OTHERWISE SPECIFIED 公差参数表		 		TITLE: 产品名称: 1. 27X1.0单排直插排针L7.2/2.4	
X.X	± 0.30	X.X*	$\pm 3^*$	APPD:	核准:
X.XX	± 0.20	X.XX*	$\pm 2^*$	CHECK:	校对:
X.XXX	± 0.10	X.XXX*	$\pm 1^*$	DRAW:	绘图:
				2016-03-12	A001