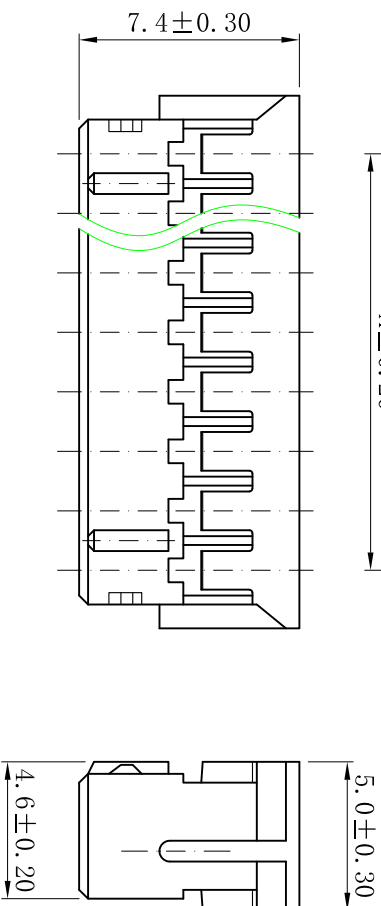
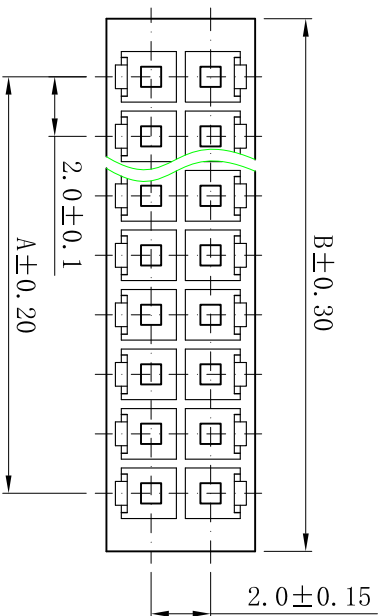


■ SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 2A, AC, DC
- Withstanding voltage: 800V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -40°C to +105°C
- Contact resistance: 20m Ω max

■ HOUSING

- Part No.:CS-2007-2X7
- Poles:4-40
- Material:Nylon 66, UL94V-0, White (白色)
- Q'TY: 500 , 1000 pcs/bag

PART NO	DIMENSION (mm)			PART NO	DIMENSION (mm)		
	A	B	C		A	B	C
CS-2007-2X2	2.00	5.90	4.50	CS-2007-2X12	22.00	25.90	24.50
CS-2007-2X3	4.00	7.90	6.50	CS-2007-2X13	24.00	27.90	26.50
CS-2007-2X4	6.00	9.90	8.50	CS-2007-2X14	26.00	29.90	28.50
CS-2007-2X5	8.00	11.90	10.50	CS-2007-2X15	28.00	31.90	30.50
CS-2007-2X6	10.00	13.90	12.50	CS-2007-2X16	30.00	33.90	32.50
CS-2007-2X7	12.00	15.90	14.50	CS-2007-2X17	32.00	35.90	34.50
CS-2007-2X8	14.00	17.90	16.50	CS-2007-2X18	34.00	37.90	36.50
CS-2007-2X9	16.00	19.90	18.50	CS-2007-2X19	36.00	39.90	38.50
CS-2007-2X10	18.00	21.90	20.50	CS-2007-2X20	38.00	41.90	40.50
CS-2007-2X11	20.00	23.90	22.50				

RoHS 2.0

本公司保留法律追究的权利。									
本公司擅自傳閱、复制和修改，未經書面許可不准由永丰盈有限公司所									
本圖紙知識產權及版權									
類別									
Housing									
品名									
CS-2007-2X7									
X.									
±0.50									
材料									
顏色									
單位									
mm									
1:1									
修改內容									
修改日期									
制定部門									
工程課									
設計									
繪制									
李文暢									
X.X									
±0.30									
工程圖號									
CST-2007									
審核									
姚培柱									
X.XXX									
±0.20									
制定日期									
2017-10-19									
核准									
周中湖									
X.XXXX									
±0.10									
CST									
深圳市永丰盈电子有限公司									
ShenZhenYongFengYing ELECTRONICS CO., LTD.									
1									
2									
3									