



RMSB40A thru RMSB40M

GLASS PASSIVATED SURFACE MOUNT BRIDGE RECTIFIERS

REVERSE VOLTAGE - 50 to 1000 Volts

FORWARD CURRENT - 4 Amperes

GENERAL DESCRIPTION


Suitable for AC-to-DC bridge full wave rectification for SMPS, LED lighting, adapter, battery charger, home appliances, office equipment, and telecommunication applications.

FEATURES

- Compact, thin profile package design
- Ideal for SMT manufacturing
- Reliable robust construction

MECHANICAL DATA

- Molding compound meets UL 94 V-0 flammability rating, Halogen-free, RoHS-compliant, and commercial grade
- Polarity indicator: As marked on body

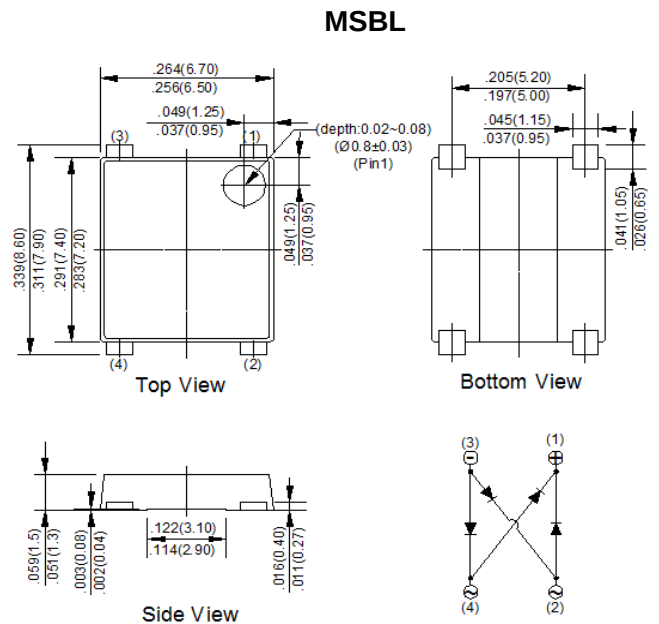

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave ,60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

CHARACTERISTICS	SYMBOL	RMSB40A	RMSB40B	RMSB40D	RMSB40G	RMSB40J	RMSB40K	RMSB40M	UNIT
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current @T _C =120℃	I _(AV)	4							A
Peak Forward Surge Current @ 8.3ms	I _{FSM}	125							A
Maximum Forward Voltage @ T _J = 25℃ @ 2.0A DC @ 4.0A DC	V _F	1.3 1.5							V
Maximum DC Reverse Current at Rated DC Blocking Voltage @T _J =25℃ @T _J =125℃	I _R	5 500							μA
Maximum Reverse Recovery Time	T _{RR}	150				250	500		ns
Typical junction Capacitance per element (Note 1)	C _J	35							pF
I ² t Rating for fusing (1ms < t < 8.3ms)	I ² t	64.8							I ² t
Typical Thermal Capacitance (Note 2)	R _{θJC}	8							℃/W
	R _{θJL}	15							
	R _{θJA}	25							
Operating Temperature Range	T _J	-55 to +150							℃
Storage Temperature Range	T _{STG}	-55 to +150							℃

Notes: 1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

2. Thermal Resistance test performed in accordance with JESD-51. Unit mounted on

15 mm*12 mm*1.6 mm AL pad attach 195 mm*110 mm*10 mm steel plate

3. The typical data above is for reference only(典型值仅供参考).

RATING AND CHARACTERISTIC CURVES

RMSB40A thru RMSB40M

FIG. 1 – FORWARD CURRENT DERATING CURVE

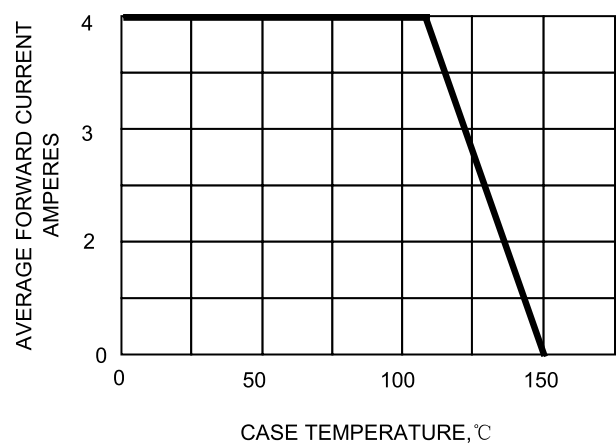


FIG. 2 – MAXIMUM NON-REPETITIVE SURGE CURRENT

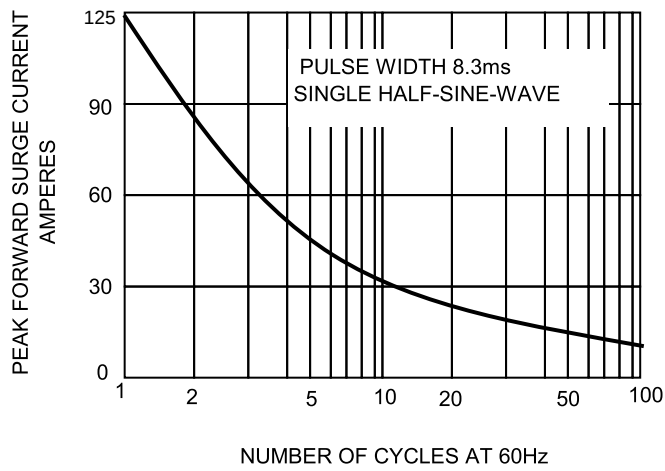


FIG.3-TYPICAL FORWARD CHARACTERISTICS

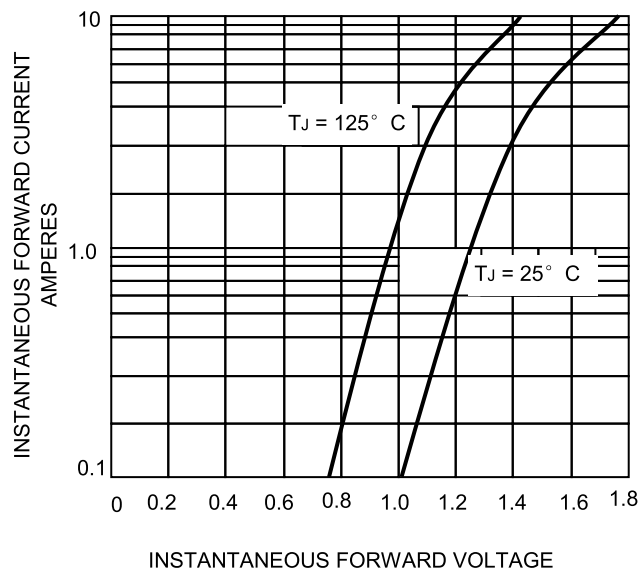


FIG.4 – TYPICAL JUNCTION CAPACITANCE


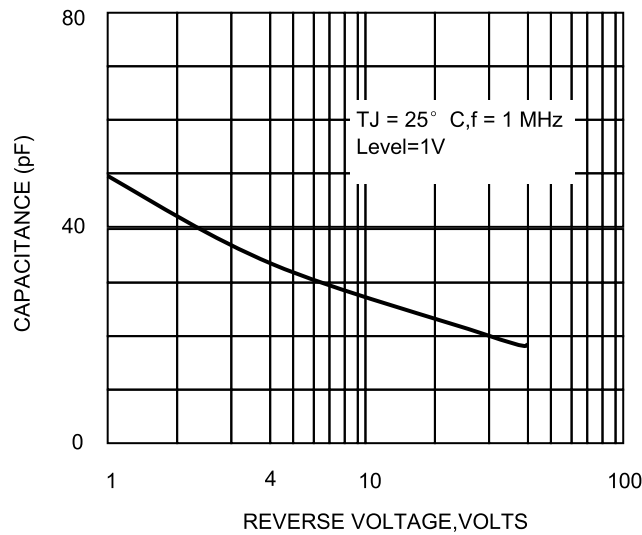


FIG.5- TYPICAL REVERSE CHARACTERISTICS

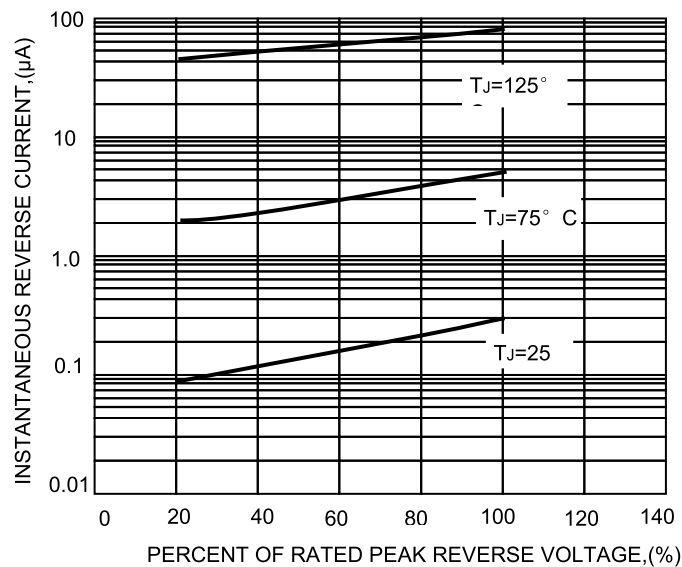

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!