


Pin Spacing: 7.50mm
 Orientation: Horizontal Plug
 Clamp Type: Screw Cage
 Design: Single Mold


SHxx-7.50
ELECTRICAL

	Current	Voltage	Wire Range
US	12A	300V	30-14AWG
	16A	750V	2.5mm ² Stranded 4.0mm ² Solid


INSTALLATION DATA

Screw Size	M3	PCB Hole Size	—
Torque	0.5Nm (4.5 lbf-in.)	Stripping Lgth.	7.6mm


MATERIAL

Body	Polyamide	Screw	Galvanized Steel
Flammability Class	UL94V-0	Terminal	Nickel Brass
Temperature Limit	105°C UL 125°C IEC	Clamp	Nickel Brass
Color	Green		

No. Poles	Cat. #	Length (mm)	Std. Pk.
2	SH02-7.50	15.0	100
3	SH03-7.50	22.5	100
4	SH04-7.50	30.0	50
5	SH05-7.50	37.5	50
6	SH06-7.50	45.0	50
7	SH07-7.50	52.5	50
8	SH08-7.50	60.0	50
9	SH09-7.50	67.5	50
10	SH10-7.50	75.0	50
11	SH11-7.50	82.5	20
12	SH12-7.50	90.0	20
13	SH13-7.50	97.5	20
14	SH14-7.50	105.0	20
15	SH15-7.50	112.5	20
16	SH16-7.50	120.0	20

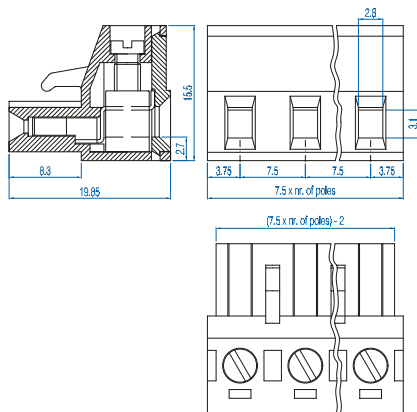

Pin Spacing: 7.50mm
 Orientation: Vertical Header
 Clamp Type: —
 Design: Single Mold - Open End


PVxx-7.50
ELECTRICAL

	Current	Voltage	Wire Range
US	12A	300V	—
	16A	750V	—

INSTALLATION DATA

Screw Size	—	PCB Hole Size	1.5mm
Torque	—	Stripping Lgth.	—

MATERIAL

Body	Polyamide	Screw	—
Flammability Class	UL94V-0	Terminal	Tin-Plated Brass
Temperature Limit	105°C UL 125°C IEC	Clamp	—
Color	Green		

No. Poles	Cat. #	Length (mm)	Std. Pk.
2	PV02-7.50	15.0	100
3	PV03-7.50	22.5	100
4	PV04-7.50	30.0	50
5	PV05-7.50	37.5	50
6	PV06-7.50	45.0	50
7	PV07-7.50	52.5	50
8	PV08-7.50	60.0	50
9	PV09-7.50	67.5	50
10	PV10-7.50	75.0	50
11	PV11-7.50	82.5	20
12	PV12-7.50	90.0	20
13	PV13-7.50	97.5	20
14	PV14-7.50	105.0	20
15	PV15-7.50	112.5	20
16	PV16-7.50	120.0	20

