




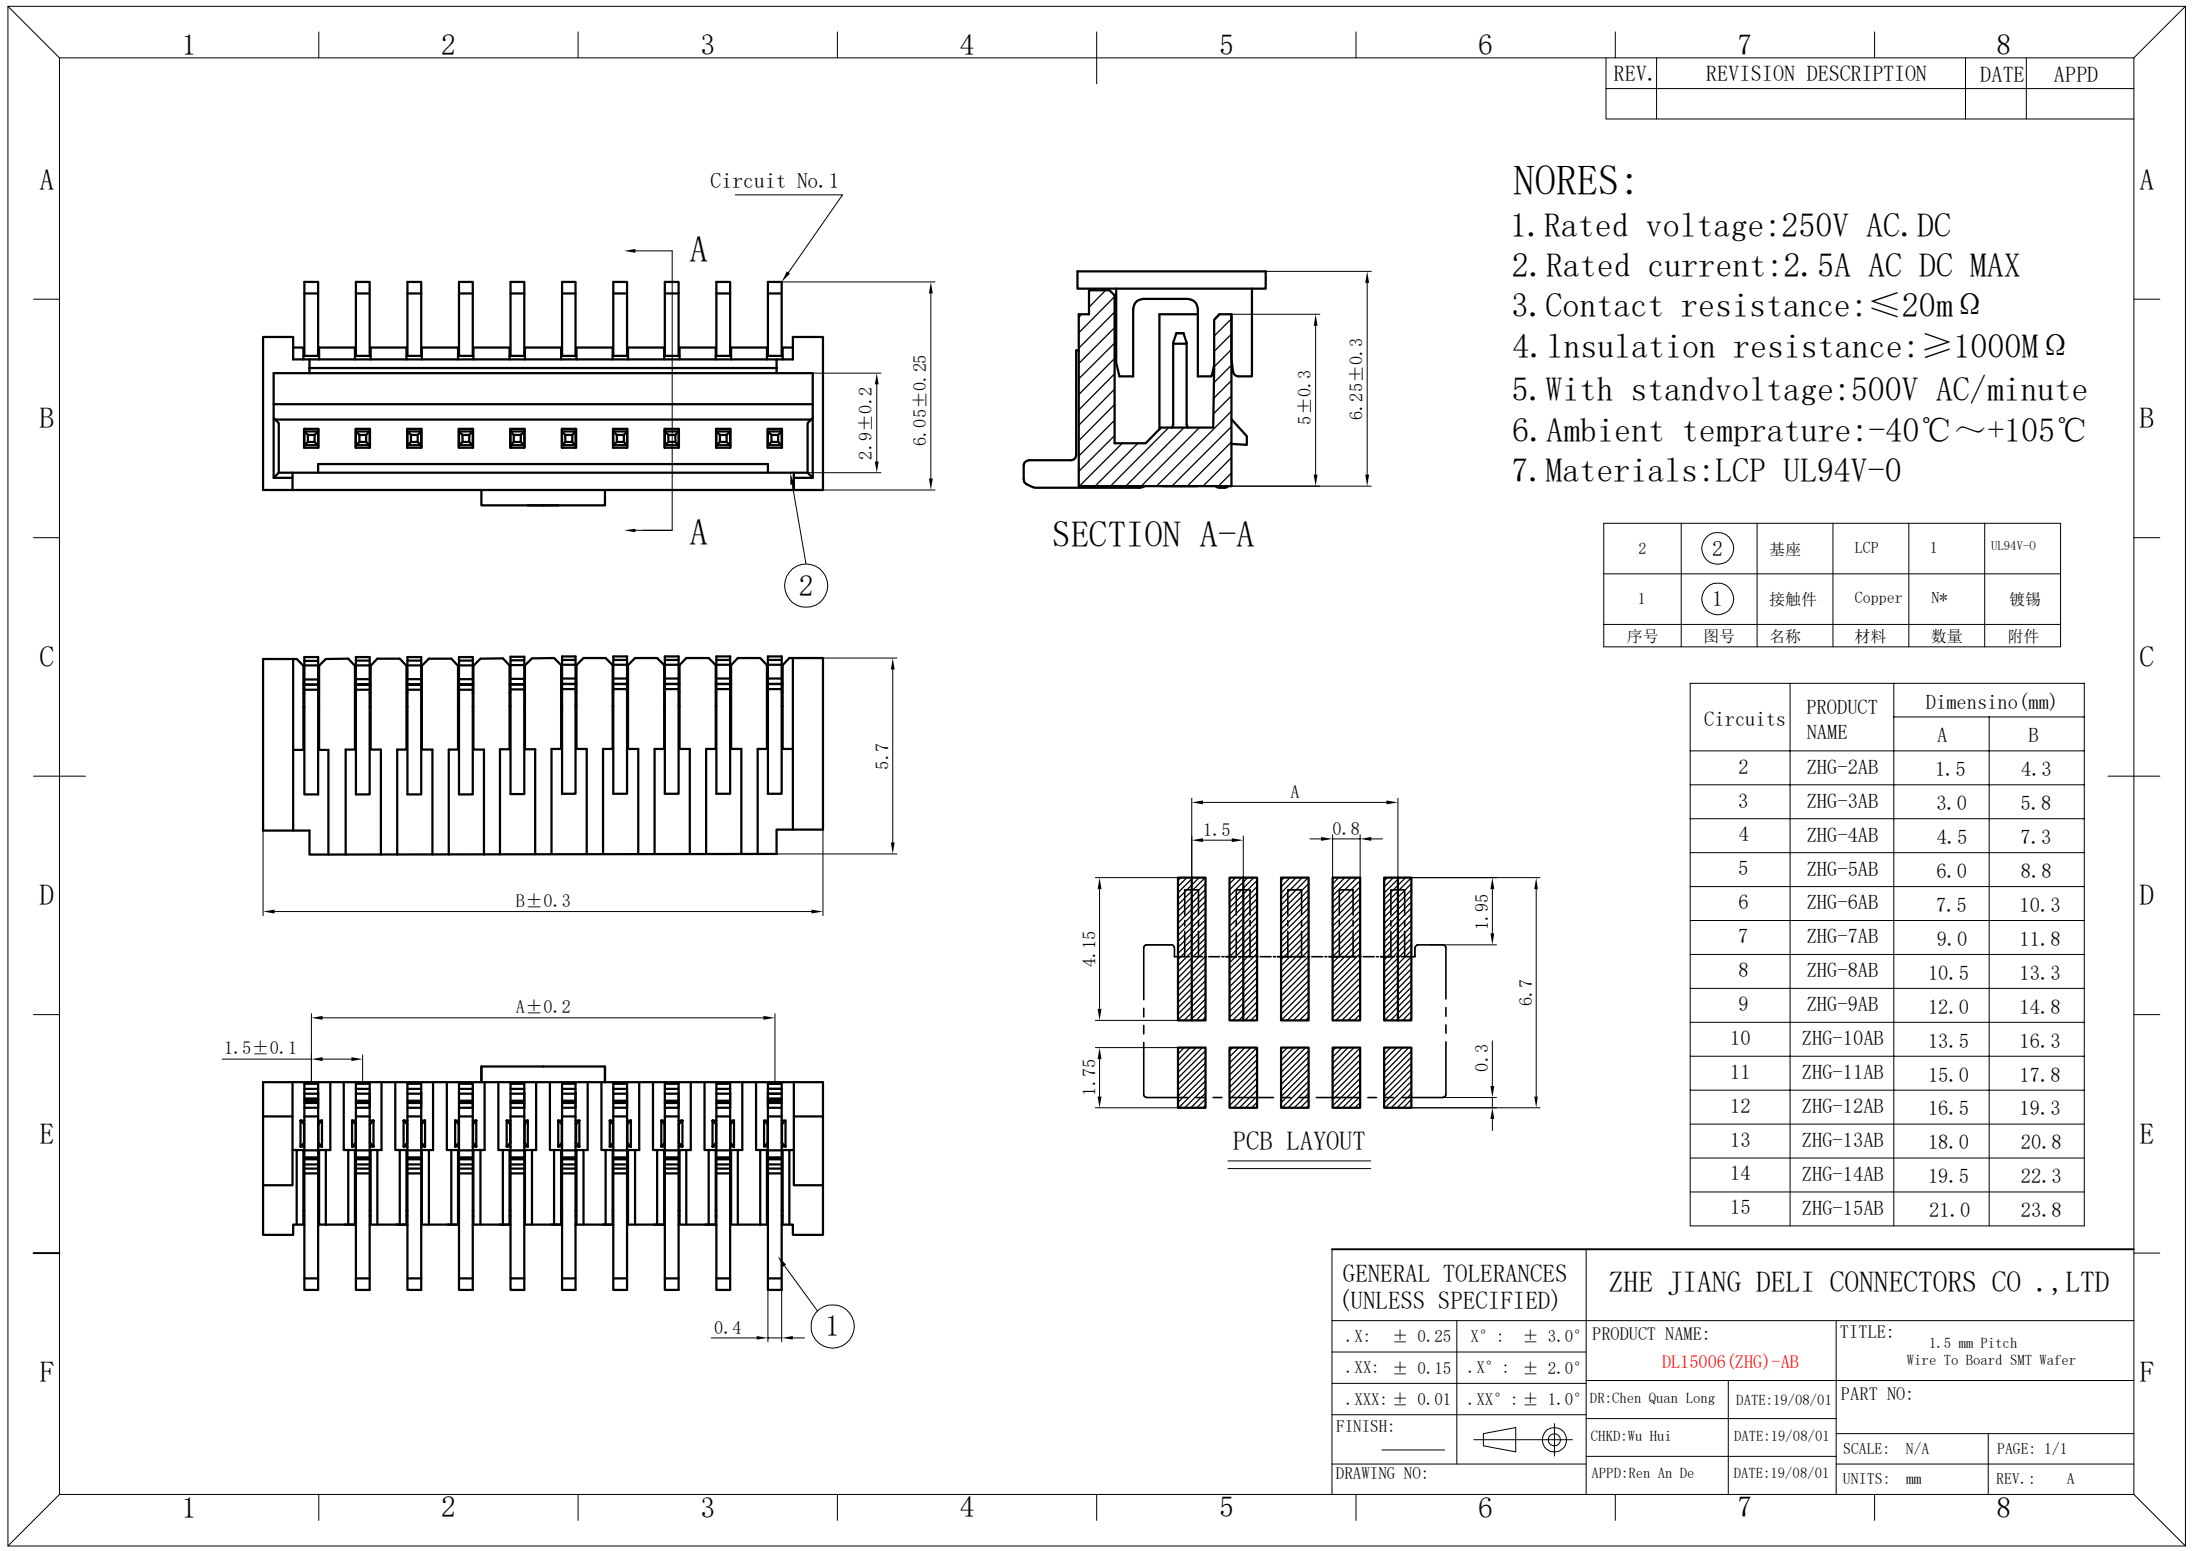

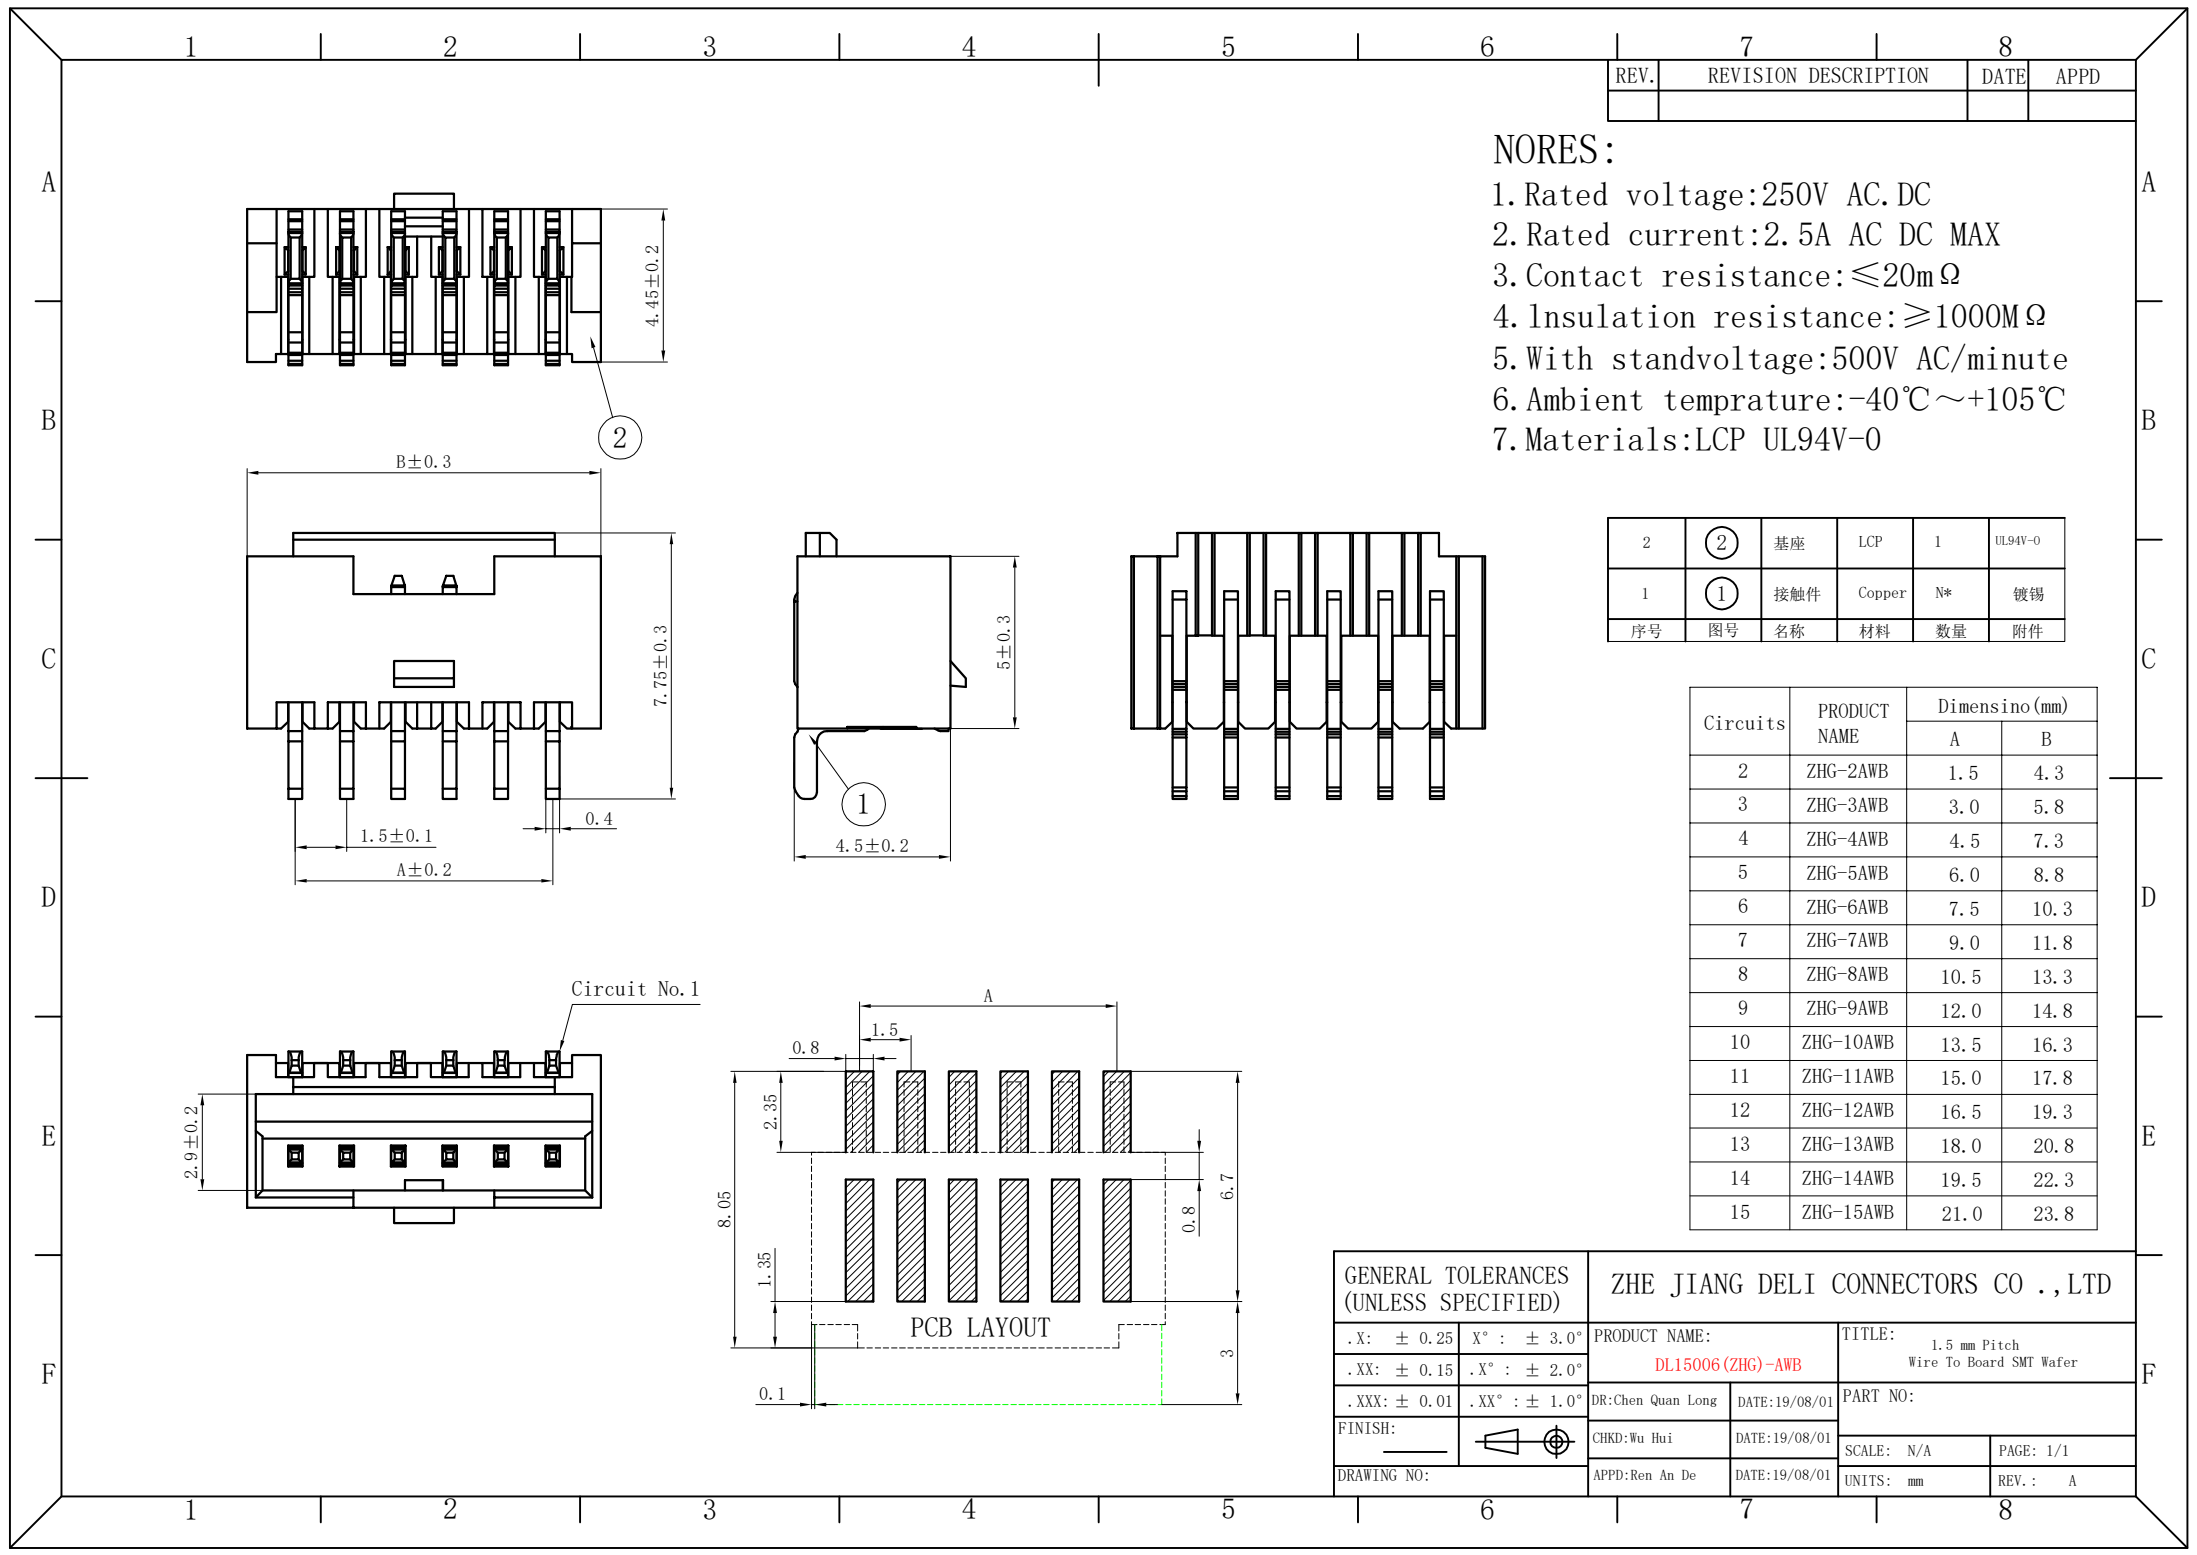

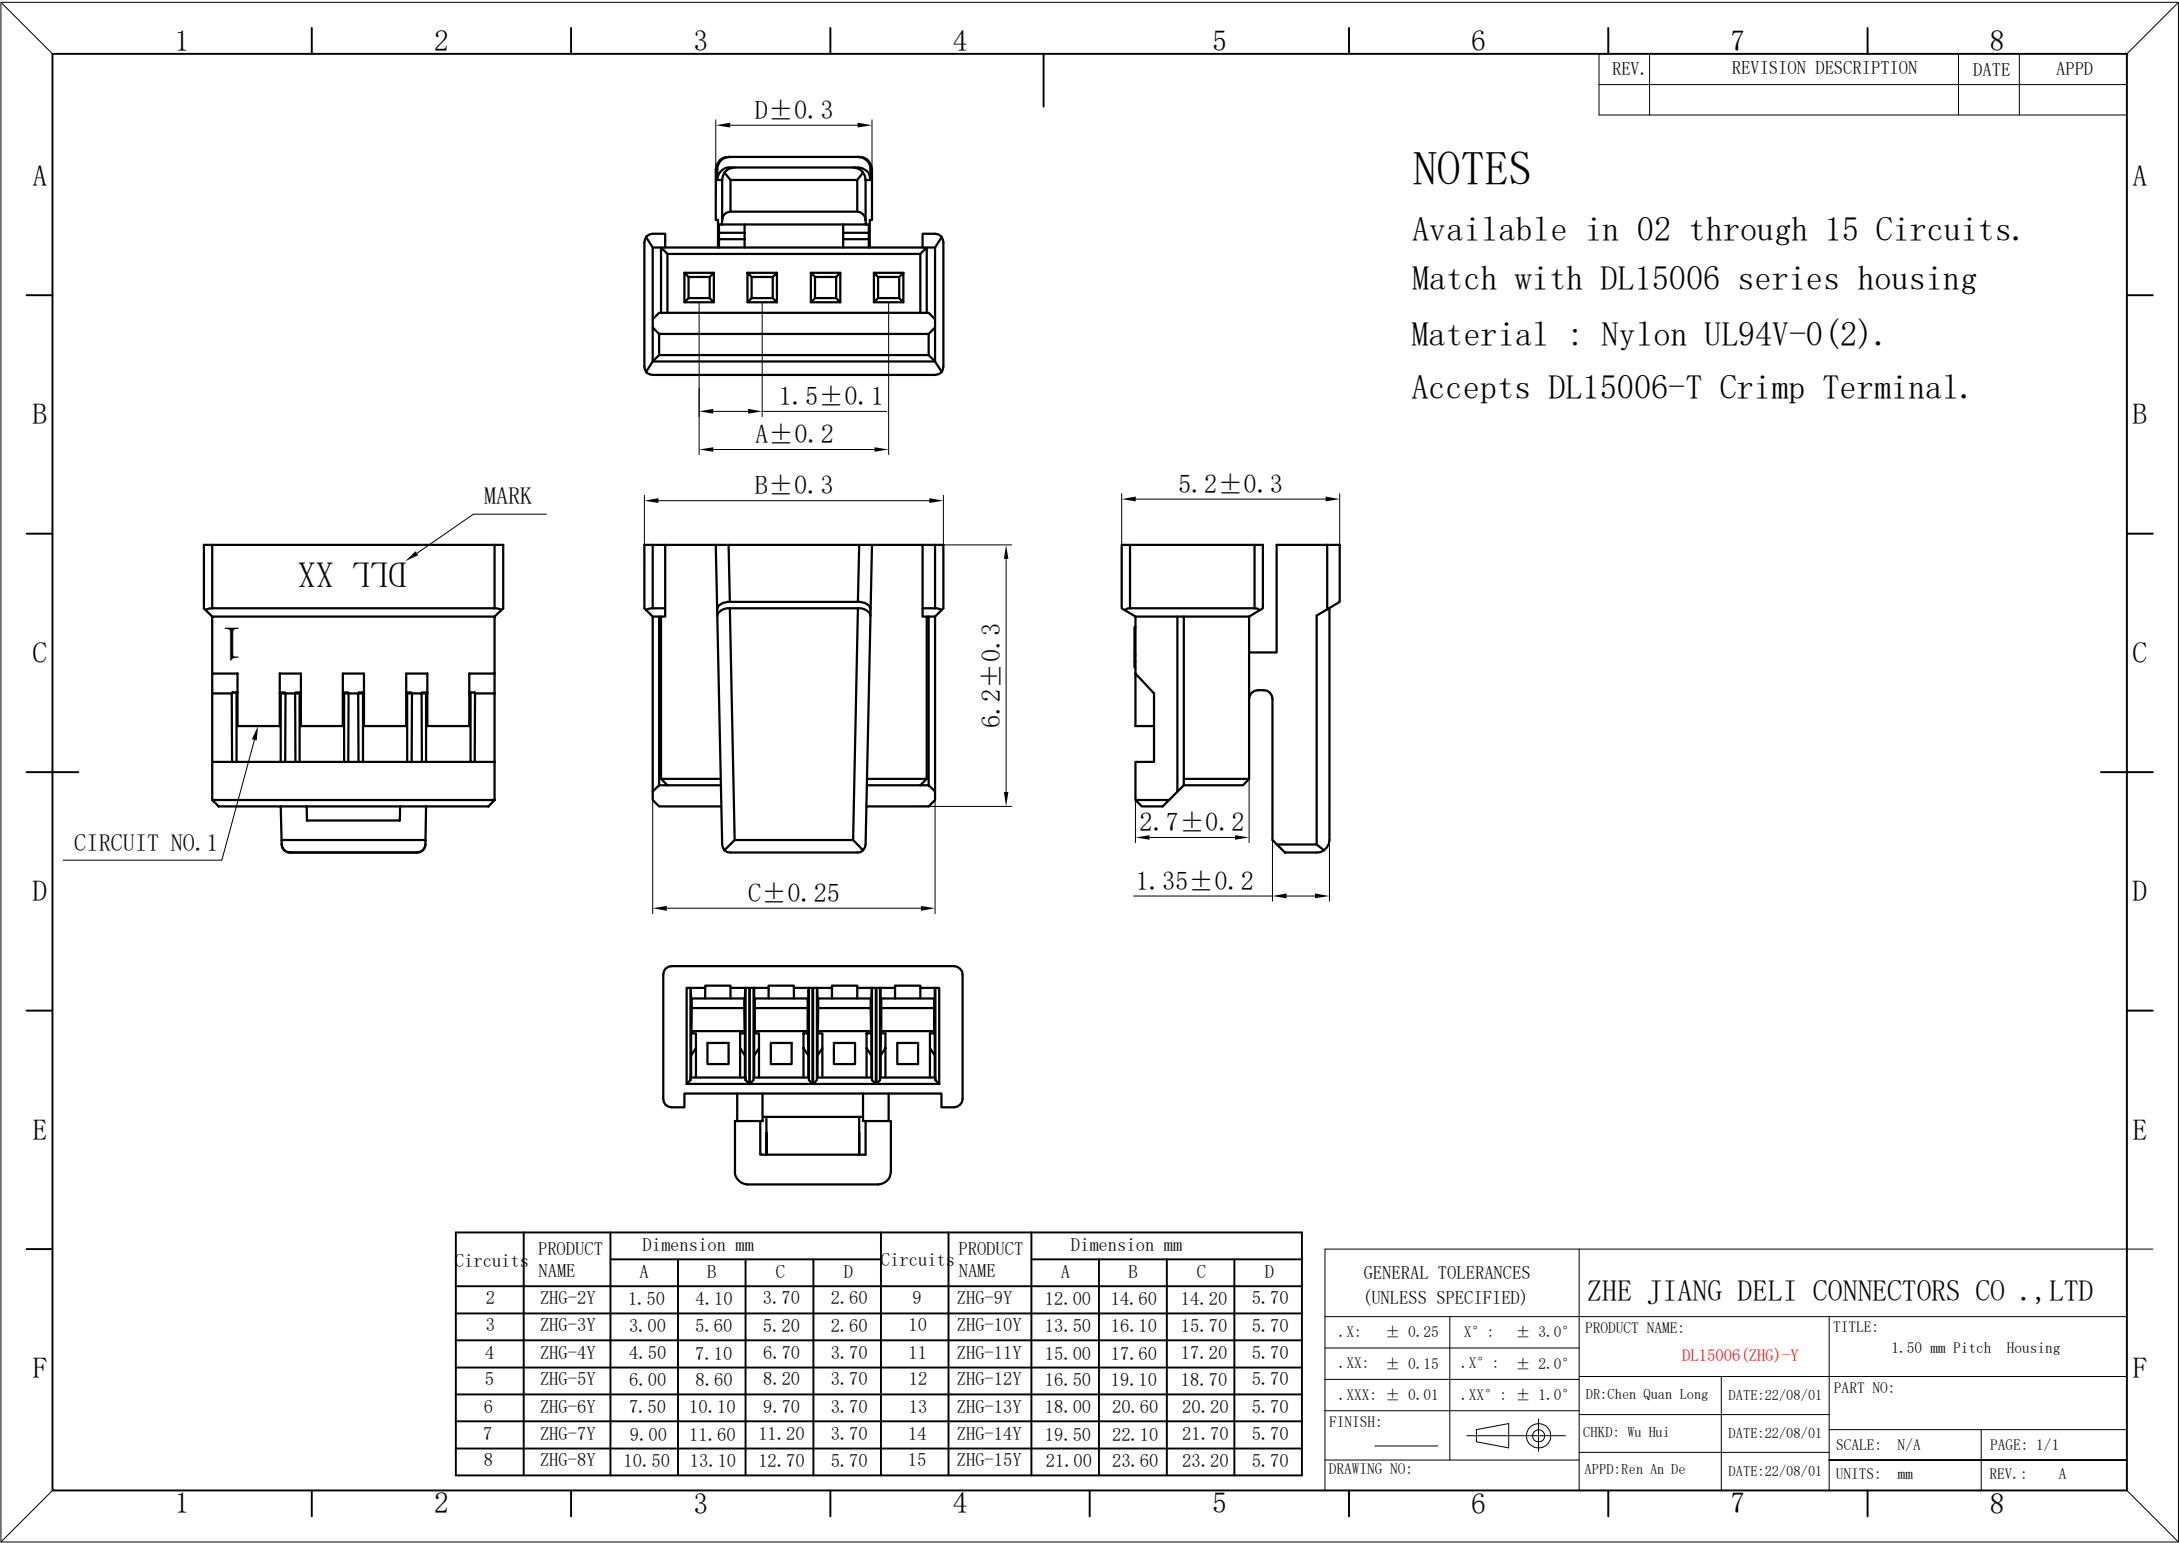

REV.	REVISION DESCRIPTION	DATE	APPD

NOTES

Available in 02 through 15 Circuits.


Match with DL15006 series housing

Material : Nylon UL94V-0(2).

Accepts DL15006-T Crimp Terminal.


Circuits	PRODUCT NAME	Dimension mm				Circuits	PRODUCT NAME	Dimension mm			
		A	B	C	D			A	B	C	D
2	ZHG-2Y	1.50	4.10	3.70	2.60	9	ZHG-9Y	12.00	14.60	14.20	5.70
3	ZHG-3Y	3.00	5.60	5.20	2.60	10	ZHG-10Y	13.50	16.10	15.70	5.70
4	ZHG-4Y	4.50	7.10	6.70	3.70	11	ZHG-11Y	15.00	17.60	17.20	5.70
5	ZHG-5Y	6.00	8.60	8.20	3.70	12	ZHG-12Y	16.50	19.10	18.70	5.70
6	ZHG-6Y	7.50	10.10	9.70	3.70	13	ZHG-13Y	18.00	20.60	20.20	5.70
7	ZHG-7Y	9.00	11.60	11.20	3.70	14	ZHG-14Y	19.50	22.10	21.70	5.70
8	ZHG-8Y	10.50	13.10	12.70	5.70	15	ZHG-15Y	21.00	23.60	23.20	5.70

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO.,LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME: DL15006(ZHG)-Y		TITLE: 1.50 mm Pitch Housing	
.XX: ± 0.15	.X° : ± 2.0°			PART NO:	
.XXX: ± 0.01	.XX° : ± 1.0°	DR:Chen Quan Long	DATE:22/08/01	SCALE: N/A	
FINISH: _____		CHKD: Wu Hui	DATE:22/08/01	PAGE: 1/1	
DRAWING NO:		APPD:Ren An De	DATE:22/08/01	UNITS: mm	REV.: A

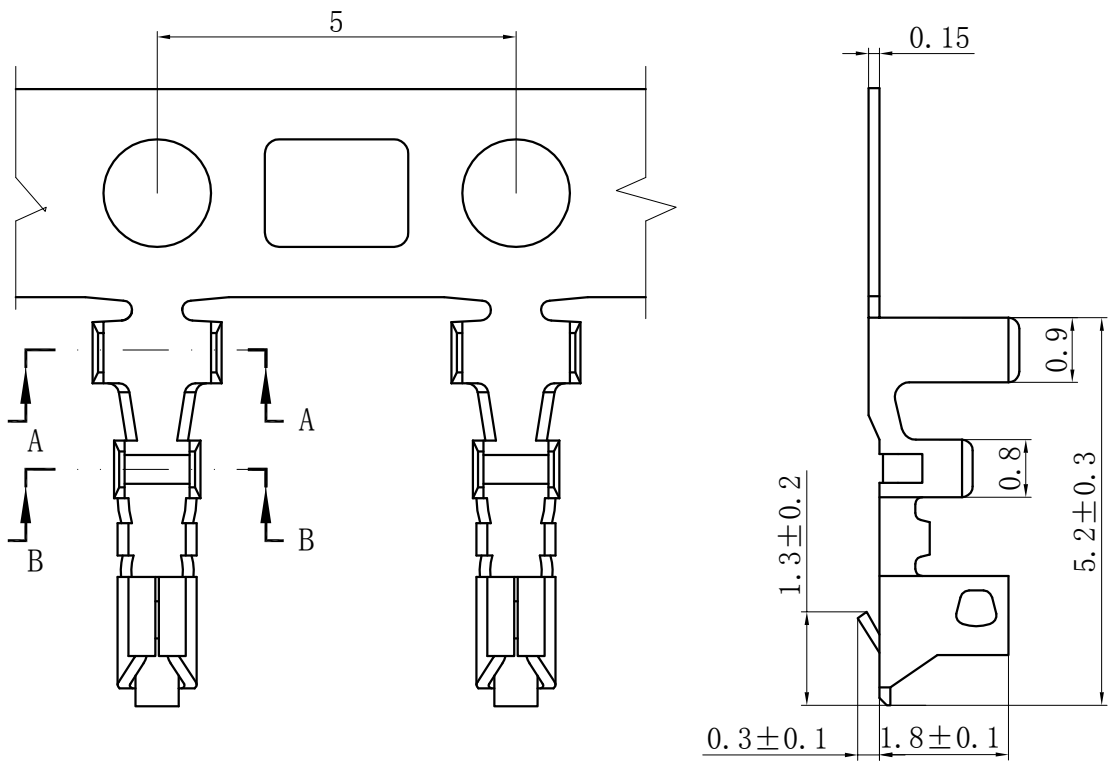


NOTES


Used in DL15006-Y Series Housing.
Accepts AWG #30~24 Wire Range.
Insulation O.D.=0.7~1.2 mm.
Material : Phosphor Bronze .
Finish: Tin plated.
Thickness: 0.15 mm.



SECTION A-A



SECTION B-B



SECTION C-C

PRODUCT NAME	Dimension (mm)				Applicable wire	Insulation O.D. (mm)
	A1	B1	A2	B2		
DL15006 (ZHG) -T	1.8	1.8	1.2	1.2	AWG#30-26	1.0mm Max
DL15006 (ZHG) -T-G	2.0	2.1	1.4	1.3	AWG#26-24	1.2mm Max

GENERAL TOLERANCES (UNLESS SPECIFIED)		ZHE JIANG DELI CONNECTORS CO., LTD			
.X: ± 0.25	X° : ± 3.0°	PRODUCT NAME:		TITLE:	
.XX: ± 0.15	.X° : ± 2.0°	DL15006 (ZHG) -T		1.50mm Pitch Crimp Terminal	
.XXX: ± 0.01	.XX° : ± 1.0°	DR: Chen Quan Long	DATE: 22.08.01	PART NO:	
FINISH:		CHKD: Wu Hui	DATE: 22.08.01	SCALE: N/A	PAGE: 1/1
DRAWING NO:		APPD: Ren An De	DATE: 22.08.01	UNITS: mm	REV.: C