


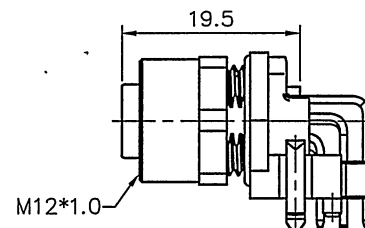



SR-M12X-XXP-FF-SF7003-00A(H)

Coding: A,B,D Pin number: 04,05,08

8pin A Coding

Pin Assignments
Front View


Panel Mounted

NOTES:


- Rated voltage/current : 4pin A: 250V / 4A
5pin A: 60V / 4A
8pin A: 30V / 2A
5pin B: 60V / 4A
4pin D: 250V / 4A
- Withstanding voltage : 4pin A: AC1500V/1Min
5pin A: AC1120V/1Min
8pin A: AC500V/1Min
5pin B: AC1120V/1Min
4pin D: AC1500V/1Min
- Levels of protection: IP67
- Wire connection mode: soldering(PCB)
- Operating temperature: -40°C~+105°C
- For Panel Thickness Max: 4.5mm
- RoHS Compliance
- Tolerance :

.X ±0.25mm
.XX ±0.1mm
Angles ±1°


4pin A Coding

Pin Assignments
Front View


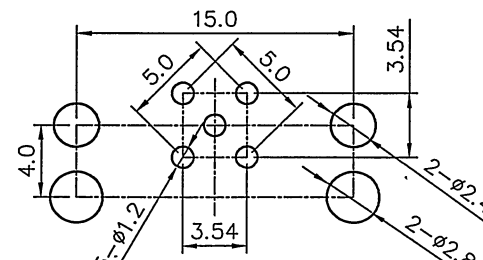
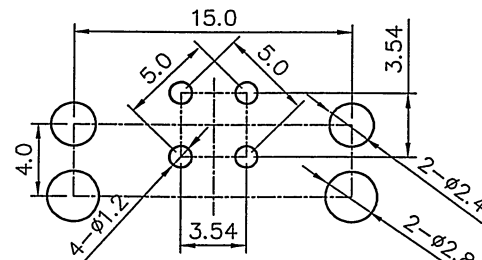
4pin D Coding

Pin Assignments
Front View

5pin A Coding

Pin Assignments
Front View

5pin B Coding

Pin Assignments
Front View

DETACHED LISTS	PART NO.: SRM12XXXPF700300AH	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD: ZK 2019.05.20	NAME: SR-M12X-XXP-FF-SF7003-00A(H)		
	CHKD: LD 2019.5.20	TITLE: CUSTOMER DRAWING		
	DRFT: SQ 2019.05.17	REV: D0-1		
THIRD ANGLE PROJECTION		DRAWING NO.: XXXXXXXX-XX-CXX	SHEET: 1/1	SCALE: 1:1
		MM (INCH)	DO NOT SCALE DRAWING	SCALE