

規 格 承 認 書

PECIFICATION FOR APPROVAL

客 戶

CUSTOMER : 立创

項 目

ITEM : 驻极体电容咪头 (ECM)

型 號

TYPE : GMI6027P-2C32DB

描述

DESCRIPTION : Φ 6.0 x 2.7 MM 插针 1033 -32dB 2.2V ≤2.2KΩ S/N: ≥58dBA

客戶料號

CUSTOMER NO. :

規 格 書 號

SPECIFICATION NO.:

版 本

EDITION NO. : V1.2

日 期

DATE : 2020-1-9

客戶承認

CUSTOMER CONFIRM AND SIGN

| 檢查 TESTED BY | 審核 CHECKED BY | 承認 APPROVED BY |
|-----------------|------------------|-------------------|
| | | |

東莞市贏海電子有限公司

DONGUAN INGHAI ELECTRONICS CO.,LTD

| 製作 ISSUED BY | 審查 CHECKED BY | 確認 APPROVED BY |
|-----------------|------------------|-------------------|
| 周明 | 刘承成 | |

地址：廣東省東莞市虎門鎮懷德社區雅瑤工業区

電話 / TEL: 0769-83060958 傳真 / FAX: 0769-81608993

網址：HTTP://WWW.INGHAI.COM

A. SCOPE

This specification applies electret condenser microphone, GMI6027P-2C32DB


B. SPECIFICATION

■Test condition: $RL=2.2K\Omega$ $VS=2.0V$ $TEMP=25^{\circ}C \pm 2^{\circ}C$ Related humidity= $65\pm 5\%$


| No. | Item | Symbol | Unit | Specification | Condition |
|--|----------------------------|------------------------|------------|--------------------------|---|
| 1 | Directivity | | | Omnidirectional | |
| 2 | Sensitivity | S | dB | -32±3 | $f=1KHz, 1Pa$ $0dB=1V/Pa$ |
| 3 | Standard operating voltage | V_s | V | 2.0 | |
| 4 | Output impedance | Z_{out} | K Ω | ≤ 2.2 | $f=1KHz, 1Pa$ |
| 5 | Frequency | | Hz | 100-10000 | |
| 6 | Max operating voltage | | V . | 10 | |
| 7 | Sensitivity reduction | $\triangle S-V_s$ | dB | -3 | $f=1KHz, 1Pa$ $V_s=1.5VDC$ to $3VDC$ |
| 8 | Max. current consumption | I_{DSS} | mA | ≤ 0.5 | |
| 9 | Signal to noise ration | S/N | dBA | ≥ 58 | $f=1KHz, P_{in}=1Pa$ |
| 10 | Max. Sound Pressure Level | S.P.L | dB | 110 | |
| 11 | Operation temp. | | °C | -20 ~+60 | |
| 12 | Storage temp. | | °C | -30 ~+70 | |
| 13 | Dimension | | mm | $\varphi 6.0 \times 2.7$ | See appearance drawing |
| 14 | Terminal | | | Terminal | See appearance drawing |
| We use "Pascal(Pa)" indication of sensitivity as per the recommendation of I.E.C.(International Electro technical Commission) The Sensitivity of "Pa" will increase 20dB comparing with "ubar" indication Example: -60dB(0dB=1V/ubar) = -40dB(1V/Pa) | | | | | |

C. TYPICAL FREQUENCY RESPONSE CURVE

全指向性

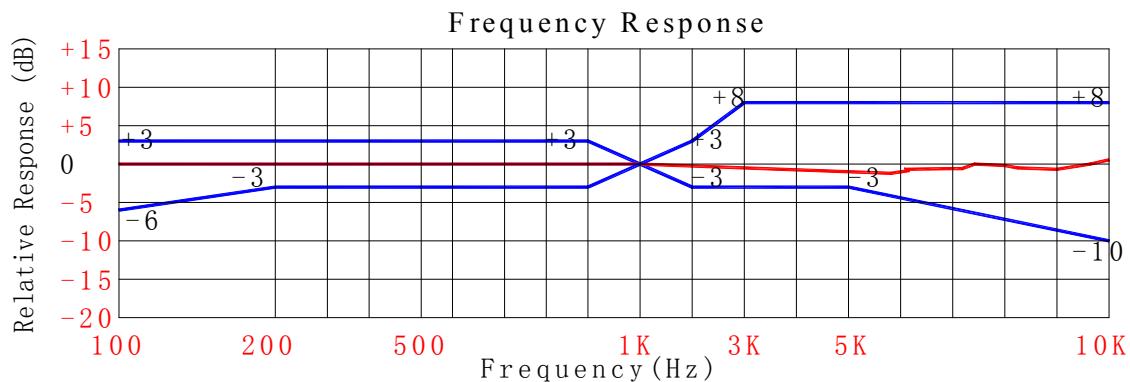


D. APPEARANCE DRAWING

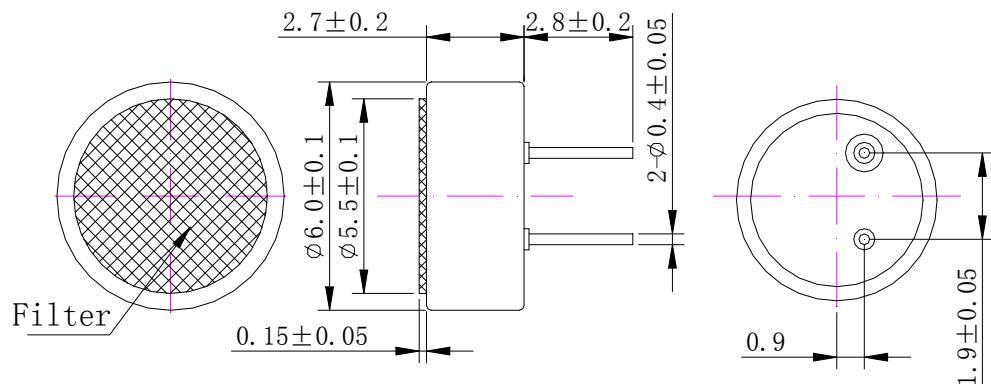


E. MEASUREMENT CIRCUIT

V_s:Source Voltage 2.0V R_L:Load Resistance 2.2KΩ

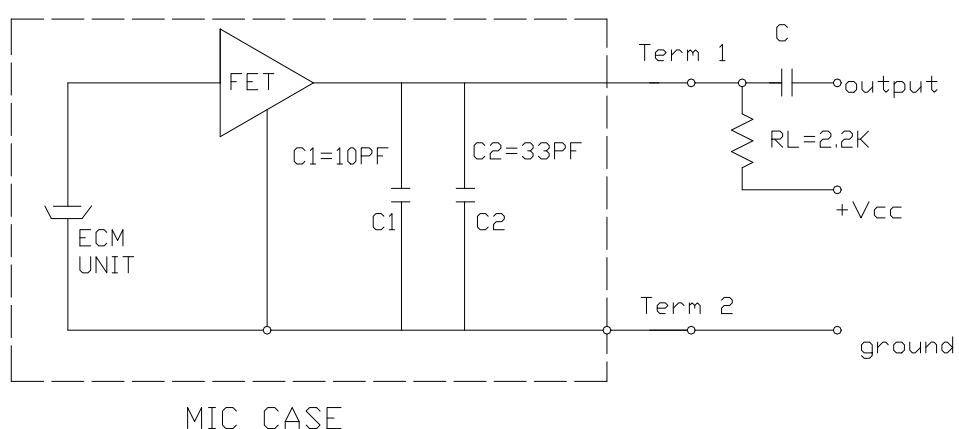

F : Explode Drawing

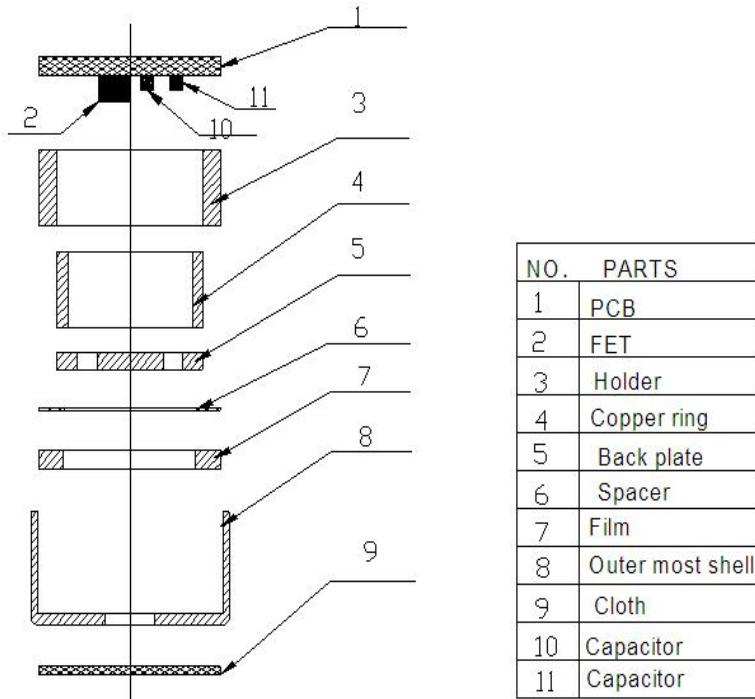

G. 可靠性试验 Reliability Test

经过以下所有试验在 20°C 的条件下放置 3 小时后,麦克风的灵敏度与试验前比较变化在 3dB 以内

After any following tests, the sensitivity of the microphone to be within $\pm 3\text{dB}$ of initial sensitivity after 3hours of conditioning at 20°C

| | |
|--|--|
| 5-1 振动试验 Vibration | 周波数 1/Frequency 1:10Hz~55Hz 振幅/Amplitude: 1.52mm 变化/Change of Frequency: 1 octave/min 3 方向,各 2 小时/hours in each of 3 axes |
| 5-2 高温试验 Dry Heat | +80 $\pm 5^\circ\text{C}$ for 96 hours |
| 5-3 低温试验 Dry Cold | -40 $\pm 5^\circ\text{C}$ for 96 hours |
| 5-4 高温高湿试验 Damp Heat | 90%~95%RH, +70 $\pm 5^\circ\text{C}$ for 96 hours |
| 5-5 温度循环试验 Temperature cycles | -20°C \leftrightarrow 25°C \leftrightarrow 70°C (2h) (1h) (2h) (1h) (2h) $\times 10$ cycles |
| 5-6 跌落试验 Packing drop test | Height: 1m 顺序: 三个面各跌 10 次 Procedure: 10 times from each of 3 axes |
| 5-7 温度冲击试验 Temperature impact test | -20°C \leftrightarrow 70°C 30min 30s 30min $\times 10$ cycles |
| 5-8 静电冲击试验 Electrostatic shock test | 6000V(contact), 8000V(air) $\times 10$ axes |
| 备注 Note | |

| | |
|-------------------------------------|--------------|
| 6-1 工作温度范围 Operation Temperature | -20°C ~ 70°C |
| 6-2 储存温度范围 Storage Temperature | -40°C ~ 80°C |

H. 焊接条件 Soldering Condition

7-1 焊接使用 90W 的烙铁。

The soldering copper of a type of 90W shall be applied

焊接条件

Soldering Condition.

7-2 电烙铁表面温度 $320 \pm 10^\circ\text{C}$

The temperature of the working surface of the soldering copper shall be $320 \pm 10^\circ\text{C}$

7-3 焊接时把麦克风嵌入散热能力强的金属块内。

ECM shall be soldered fixed on the metal block(heat sink)which has the higher radiation effects said heat sink

Shall contact with of ECM.

7-4 焊接时间控制在 2~3 秒内。

time for each terminal shall be 2~3 sec.


7-5 焊接后不能出现针孔。

The pinhole after soldering shall be avoided.


7-6 静电容易破坏麦克风必须采取措施避免（电烙铁接地，戴静电环等。）

ECM may easily destroyed by the static electricity and the countermeasure for eliminating the static electricity (the ground for soldering copper, for worktable and for human body) shall be executed.

7-7 散热板形状 Shape of heat sink

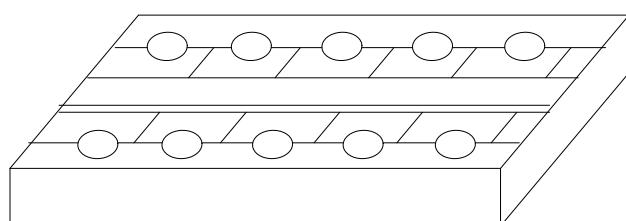

7-8 固定部孔形状 Shape of hole at fixed part

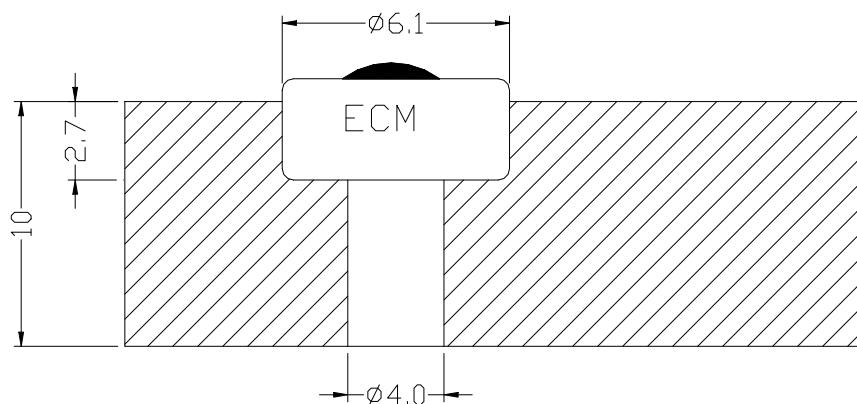

unit:mm