





LP11 SERIES PUSHBUTTON SWITCH

ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS



APPLICATIONS / MARKETS



RoHS

SPECIFICATIONS

Electrical Rating: 100mA @ 12VDC
Contact Arrangement: SPST
Electrical Life: 1,000,000 Cycles
Contact Resistance: 200mΩ Max. initial
Insulation Resistance: 100 MΩ Min. @ 500VDC
Dielectric Strength: 500VAC for 1 Minute
Travel: 4.50mm (Momentary)
 3.50mm (Latching)
Actuation Force: 160 gf (Momentary)
 200 gf (Latching)
Operating Temperature: -40°C to 85°C

FEATURES & BENEFITS

- RGB or multiple bi-color illumination options
- Tactile or non tactile feel
- Multiple cap sizes
- Long electrical life
- Latching and momentary functions

PART NUMBER CONFIGURATOR

Series	Function	Circuit	Actuators	Cap	Cap Configuration	LED Color Options*
LP11	OA EE	1	N T	A B C	S	RR RG RB RY RW BB BW GG GB GW YY YG YB YW WW RGB
LP11	OA - Momentary EE - Latching (Only using N Actuator Type)	1 - SPST	N - Non Tactile T - Tactile	A - 12mm square B - 15mm square C - 17.4mm square	S - Sculptured	RR - Red-Red RG - Red-Green RB - Red-Blue RY - Red-Yellow RW - Red-White BB - Blue-Blue BW - Blue-White GG - Green-Green GB - Green-Blue GW - Green-White YY - Yellow-Yellow YG - Yellow-Green YB - Yellow-Blue YW - Yellow-White WW - White-White RGB - Red-Green-Blue

* Please refer to individual part number drawings for LED specifications.

Specifications subject to change without notice 9.13.2018



E-SWITCH®


www.e-switch.com

800.867.2717




1

ANTI-VANDAL SWITCHES	DETECTOR SWITCHES	DIP SWITCHES	KEYLOCK SWITCHES	NAVIGATION SWITCHES	PUSHBUTTON SWITCHES	ROCKER SWITCHES	ROTARY SWITCHES	SLIDE SWITCHES	SNAP ACTION SWITCHES	TACTILE SWITCHES	TOGGLE SWITCHES	CAP SWITCHES
----------------------	-------------------	--------------	------------------	---------------------	---------------------	-----------------	-----------------	----------------	----------------------	------------------	-----------------	--------------

PCB LAYOUT



SCHEMATIC

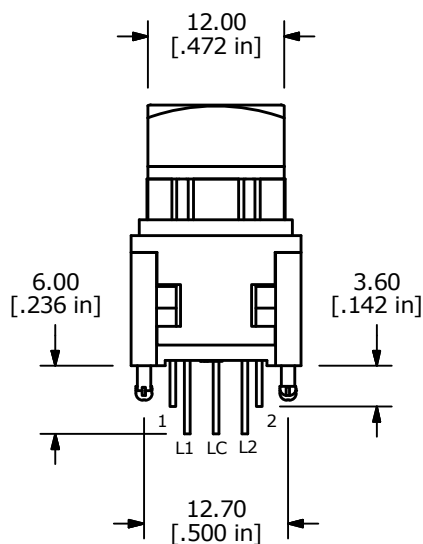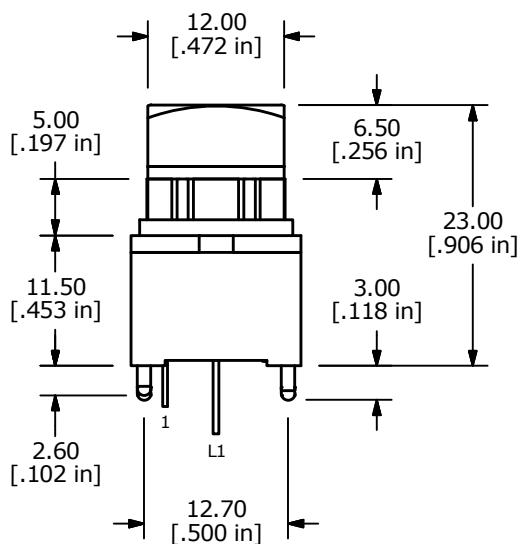






E♦SWITCH®

800.867.2717

2

LP11 SERIES PUSHBUTTON SWITCH

BODY DIMENSIONS MOMENTARY RGB

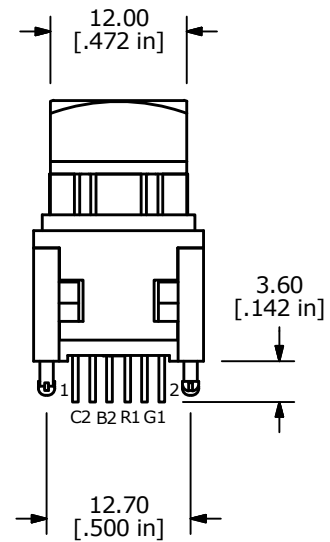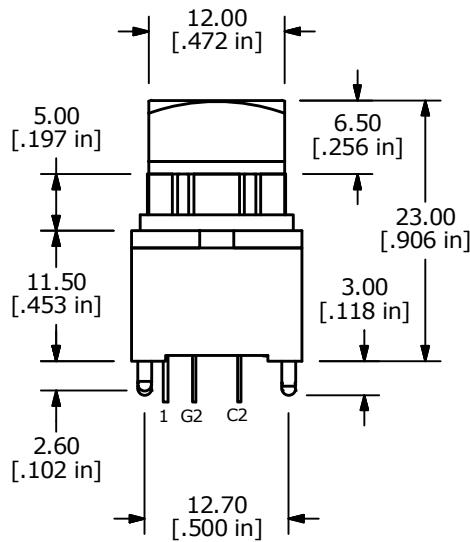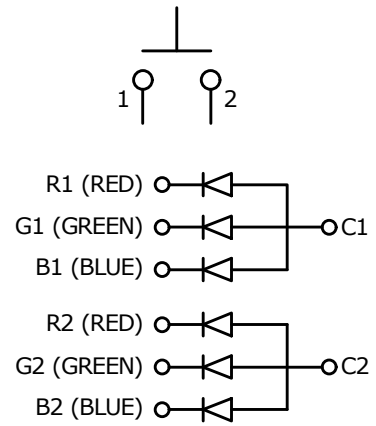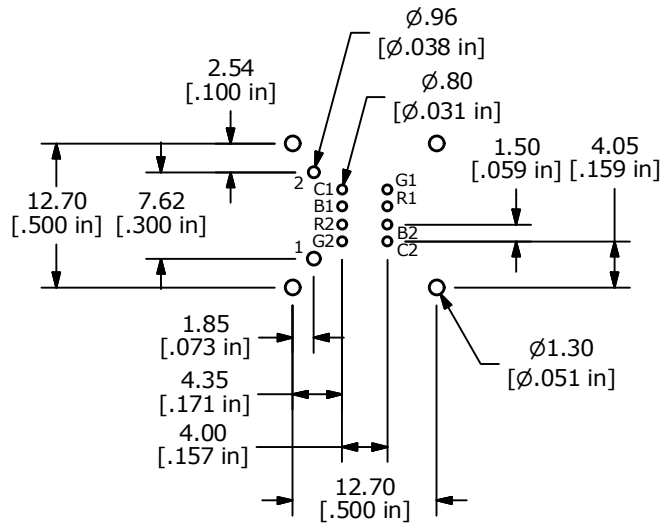

OA - MOMENTARY WITH A - 12MM CAP
RGB ILLUMINATION



E-SWITCH®

www.e-switch.com

800.867.2717

3

ANTI-VANDAL SWITCHES	DETECTOR SWITCHES	DIP SWITCHES	KEYLOCK SWITCHES	NAVIGATION SWITCHES	PUSHBUTTON SWITCHES	ROCKER SWITCHES	ROTARY SWITCHES	SLIDE SWITCHES	SNAP ACTION SWITCHES	TACTILE SWITCHES	TOGGLE SWITCHES	CAP OPTIONS
----------------------	-------------------	--------------	------------------	---------------------	---------------------	-----------------	-----------------	----------------	----------------------	------------------	-----------------	-------------

[illegible]



Technical drawing of a mechanical component, likely a valve or actuator, showing dimensions in inches and millimeters. The drawing includes a side view and a top view.

Dimensions (Inches / Millimeters):

- Top View:
 - Overall Width: 12.00 [472]
 - Distance from Centerline to Top Edge: 5.00 [197]
 - Distance from Centerline to Bottom Edge: 11.50 [453]
 - Distance from Centerline to Bottom Flange: 2.60 [102]
- Side View:
 - Overall Height: 23.00 [906]
 - Distance from Top Flange to Bottom Flange: 6.50 [256]
 - Distance from Bottom Flange to Base: 3.00 [118]
- Bottom View:
 - Overall Width: 12.70 [500]

Labels:


- 1: Bottom Flange
- L1: Bottom Flange

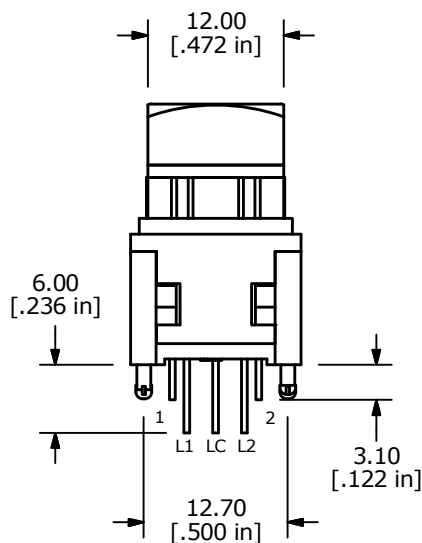


4

LP11 SERIES PUSHBUTTON SWITCH




BODY DIMENSIONS LATCHING RGB

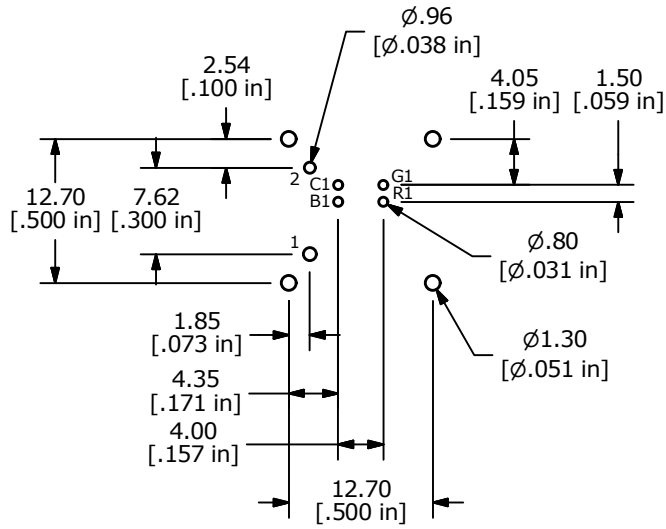

PCB LAYOUT



SCHEMATIC

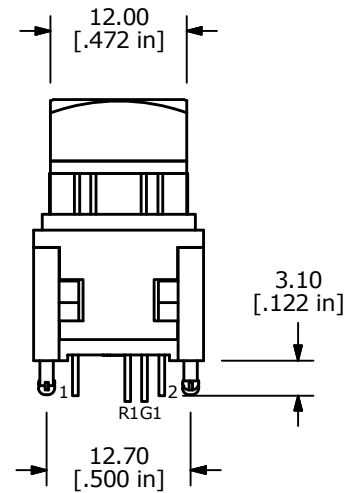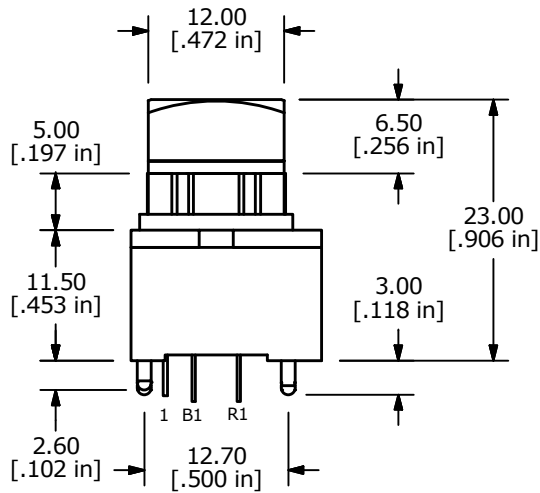

EE - LATCHING WITH A - 12MM CAP
RGB ILLUMINATION



E-SWITCH®


www.e-switch.com

800.867.2717

5

LP11 SERIES PUSHBUTTON SWITCH

CAP OPTIONS

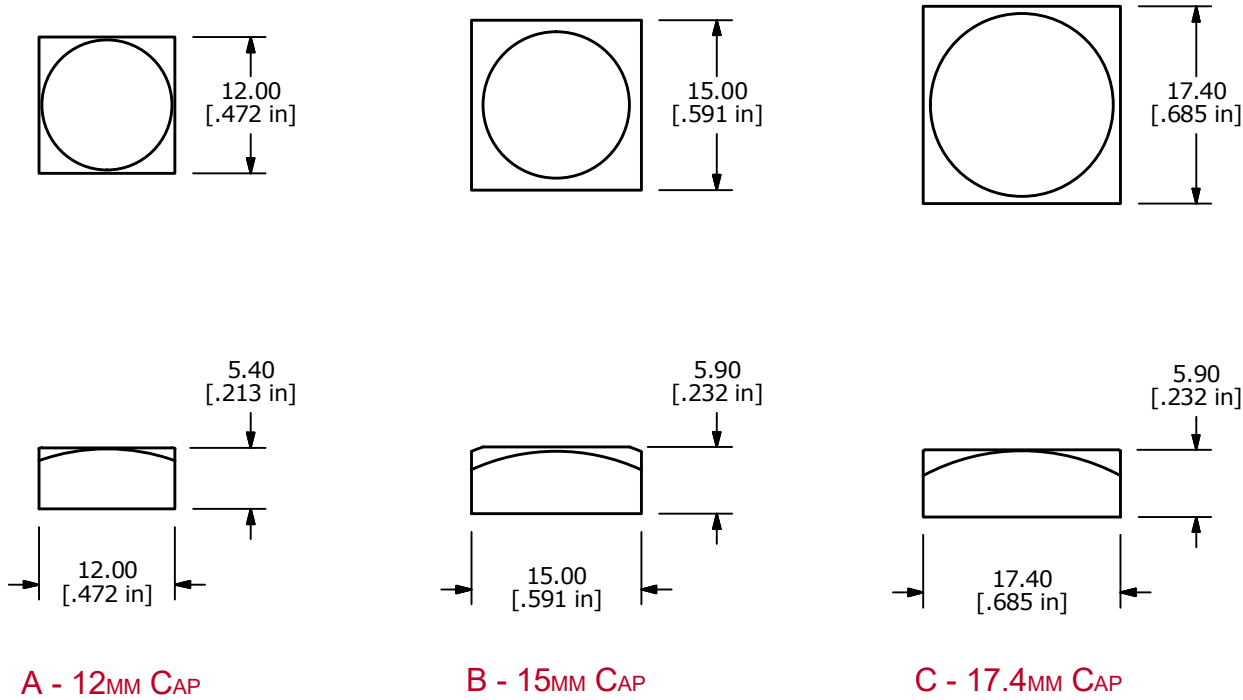

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[E-Switch:](#)

[LP11EE1NXXYG](#)