



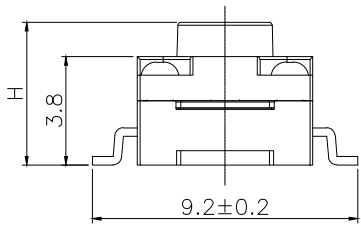
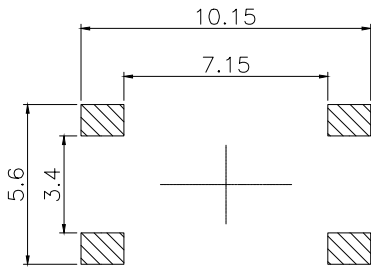



REV.	ECN NO OR DESCRIPTION	DRAW	DATE

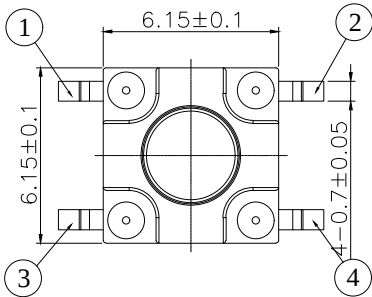

CIRCUIT DIAGRAM

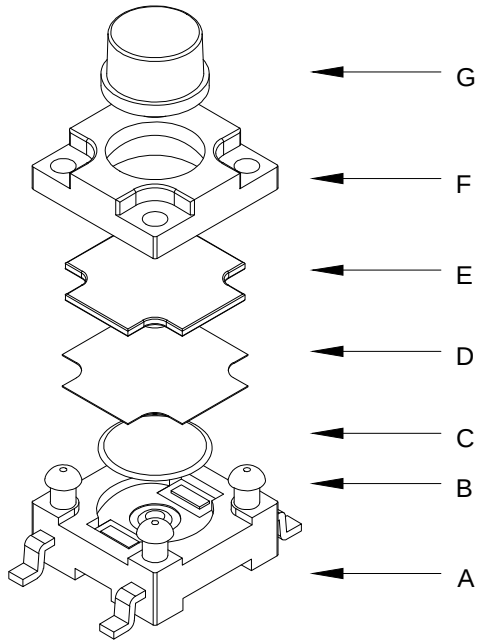

PCB.WELDING DRAWING

主要技术参数、性能

The Main Thchnology Performance

额定电流、电压 Rate voltage,current	50mA DC12V
接触电阻 Contact resistance	≤100mΩ
按力 Operating force	±50gf
行程 travel	0.3±0.1mm
绝缘电阻 Insulated resistance	≥100MΩ
介电强度 Dielectric strength	≥250VAC/1min

Part No	H(高度)	Part No	H(高度)
SMG-13T-H043A1	4.30	SMG-13T-H075A1	7.50
SMG-13T-H045A1	4.50	SMG-13T-H080A1	8.00
SMG-13T-H050A1	5.00	SMG-13T-H085A1	8.50
SMG-13T-H055A1	5.50	SMG-13T-H090A1	9.00
SMG-13T-H060A1	6.00	SMG-13T-H095A1	9.50
SMG-13T-H065A1	6.50	SMG-13T-H100A1	10.0
SMG-13T-H070A1	7.00		

G	按钮	PPA	1	黑色
F	盖板	PPA	1	黑色
E	防尘胶	硅胶	1	黑色
D	防水层	聚酰亚胺	1	橙黄色
C	弹片	不锈钢	1	镀银
B	本体	PPA	1	黑色
A	卡件	黄铜	1	镀银
项目 ITEM	名称 DESCRIPTION	材质 MATERIAL	数量 QTY	表面处理/颜色 FINSH/COLOR

GENERAL TOLERANCES (UNLESS SOECIFIED)	SCALE: 1:1 UNIT: MM	TITLE: 6*6*X贴片防水 250GF	PART NO. SMG-13T-HXXXXA1	
DISTANCE X. ±0.30 .X ±0.20 .XX ±0.15	ANGLE X.° ±2.0° .X° ±1.0° .XX° ±0.5°	Matthew Benjamin Michael /	 SM switch Co.,Ltd. 无锡斯茂科技有限公司 ISO 9001/ISO14001	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		Alexander Sophia		
		THIRD ANGLE PRDJECTION	SHEET NO 1 OF 1	