

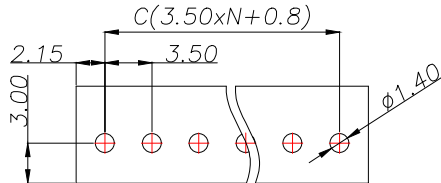


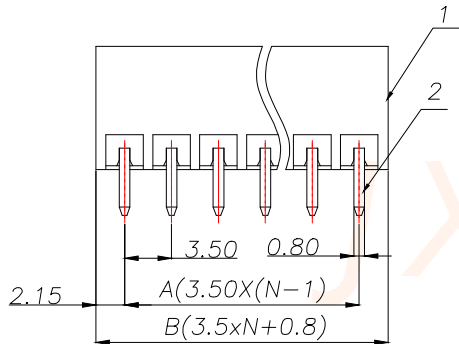




REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

General tolerances(mm)														0.1/10 ±2°
0 ~ 3	>3 ~ 6	>6 ~ 10	>10 ~ 18	>18 ~ 30	>30 ~ 50	>50 ~ 80	>80 ~ 120	>120 ~ 180	>180 ~ 250	>250 ~ 315	>315 ~ 400	>400 ~ 500	>500	
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

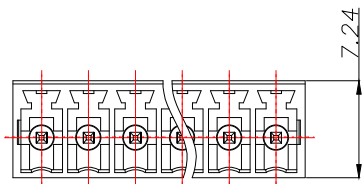

PCB LAYOUT

Product model	PIN	A	B	C
A350VC-2P0G36	2	3.50	7.80	7.80
A350VC-3P0G36	3	7.00	11.30	11.30
A350VC-4P0G36	4	10.50	14.80	14.80
A350VC-5P0G36	5	14.00	18.30	18.30
A350VC-6P0G36	6	17.50	21.80	21.80
A350VC-7P0G36	7	21.00	25.30	25.30
.....				
A350VC-24P0G36	24	3.50x(N-1)	3.5xN+0.8	3.5xN+0.8

UL Standard	B	C	D
Rated Voltage(V)/Current(A)	300/8	/	300/8
IEC Standard			
Overvoltage Category/Pollution Degree	II/2		
Rated Voltage(V)/Current(A)	250/7		
Rate Impulse Voltage(KV)	2.5		
Pitch(mm)/Poles	3.50/N=02~24P		
Operating temperature(*C)	-40C*~+105C*		
Conform to RoHS	Yes		

2	Pin	Copper Alloy	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

TOLERANCE		深圳聚兴泰电子科技有限公司 Shenzhen Juxingtai Electronic Technology Co., Ltd			
		PART NO.	TITLE:		
		A350VC-NP0G36	Socket-type terminal		
UNITS	mm	DESIGN: Ethan	MANUFACTURE DWG		
MATERILA	— — —	CHED: Olvia		SCALE	SHEET
FINISH	— — —	APPD: Ava		N:A	1/1